

AN6095SH

Reception IF + transmission quadrature modulation IC for PHS and cellular telephone

Overview

The AN6095SH is a single chip IC for PHS reception IF block and transmission block.

Reception IF block is incorporating a 2nd down-mixer and a limiter/RSSI circuit which can operate for up to 300 MHz of input frequency. Transmission block is incorporating a quadrature modulator, a phase shifter, an up-mixer for 1.9 GHz and output level control functions.

It contributes to realization of small package and small size of equipment.

Features

- Operating supply voltage range: 2.7 V to 4.0 V
- Current consumption
 - Transmission block: 28 mA
 - Reception block: 5.3 mA
 - Sleep mode: 10 μ A or less

(Transmission block)

- Output level: -8 dBm
- Output frequency: up to 2 GHz
- Transmission IF frequency: 100 MHz to 300 MHz



(Reception block)

- RSSI input D range: 80 dB
- Mixer conversion gain: 16 dB
- Limiter voltage gain: 70 dB
- 2nd down-mixer NF: 6 dB

Applications

- PHS

Block Diagram

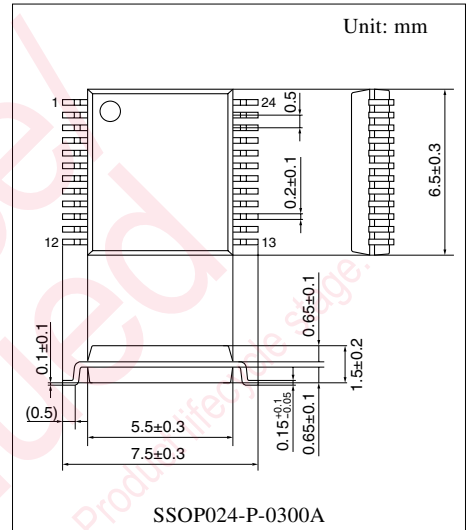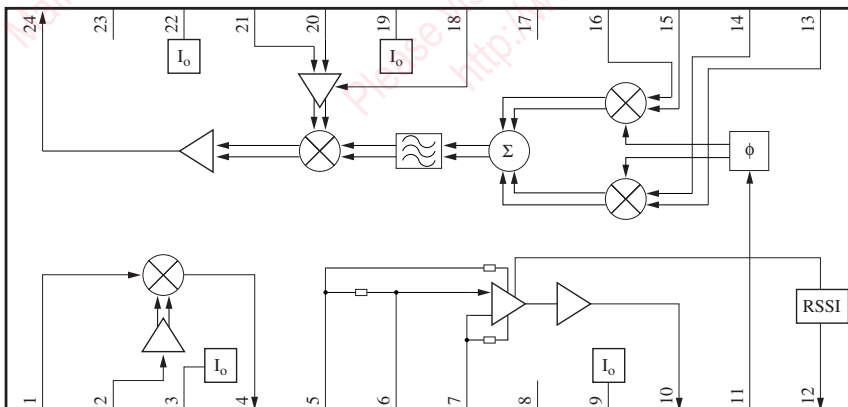

Note) The package of this product will be changed to lead-free type (SSOP024-P-0300D). See the new package dimensions section later of this datasheet.

■ Pin Descriptions

Pin No.	Symbol	Description	Pin No.	Symbol	Description
1	RXMXIN	RX-mixer-in	13	Q-IN	Q-input
2	RXLOIN	RX-local-in	14	\overline{Q} -IN	\overline{Q} -input
3	VCCM	V _{CC} -mixer	15	I-IN	I-input
4	MXO	Mixer-out	16	\overline{I} -IN	\overline{I} -input
5	LMDEC1	Limiter-decouple 1	17	GNDM	GND-TX-modulator
6	LMIN	Limiter-in	18	APC/BS	APC/BS
7	LMDEC2	Limiter-decouple 2	19	VCCM	V _{CC} -TX-modulator
8	GNDR	GND-RX	20	TXLO2R	TX-local 2-REF
9	VCCL	V _{CC} -limiter	21	TXLO2	TX-local 2
10	LMO	Limiter-out	22	VCCO	V _{CC} -TX-out
11	TXLO1	TX-local 1-in	23	GNDO	GND-TX-out
12	RSO	RSSI-out	24	TXO	TX-output

■ Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Supply voltage	V _{CC}	4.2	V
Supply current	I _{CC}	60	mA
Power dissipation	P _D	252	mW
Operating ambient temperature *	T _{opr}	-20 to +60	°C
Storage temperature *	T _{stg}	-55 to +125	°C

Note) 1. *: Except for the operating ambient temperature and storage temperature, all ratings are for T_a = 25°C.

2. For the main characteristics, refer to "■ Technical Data".

■ Recommended Operating Range

Parameter	Symbol	Range	Unit
Supply voltage	V _{CC}	2.7 to 4.0	V

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
Current consumption (reception)	$I_{\text{CCR X}}$	No signal	—	5.3	6.8	mA
Mixer conversion gain	G_{MX}	$V_{\text{MI}} = 70 \text{ dB}\mu$ Except for filter loss, SW1 = a	13	16	19	dB
Mixer maximum output level	V_{MX}	$V_{\text{MI}} = 105 \text{ dB}\mu$ Except for filter loss, SW1 = a	105	110	—	dB μ
Limiter voltage gain	G_{LM}	$V_{\text{LI}} = 20 \text{ dB}\mu$, SW1 = b	63	68	73	dB
Limiter maximum output amplitude	V_{LM}	$V_{\text{LI}} = 80 \text{ dB}\mu$, SW1 = b	300	360	—	mV[p-p]
RSSI output voltage 1	$V_{\text{S}(1)}$	No signal, SW1 = b	0	0.2	0.5	V
RSSI output voltage 2	$V_{\text{S}(2)}$	$V_{\text{LI}} = 115 \text{ dB}\mu$, SW1 = b	1.60	1.80	—	V
RSSI output slope	D_{S}	$V_{\text{S}} (V_{\text{IS}}) = V_{\text{S}(1)} + 0.15 \text{ V}$ $D_{\text{S}(1)} = V_{\text{S}} (V_{\text{IS}} + 65 \text{ dB}\mu) - V_{\text{S}} (V_{\text{IS}})$ SW1 = b	1.0	1.25	1.5	V
RSSI output slope variation	$\Delta D_{\text{S}(n)}$	$\Delta D_{\text{S}(n)} = 5 \{ V_{\text{S}} (V_{\text{IS}} + n13 \text{ dB}\mu) - V_{\text{S}} (V_{\text{IS}} + (n-1) 13 \text{ dB}\mu) \} / D_{\text{S}(1)}$ $n = 1 \text{ to } 5$, SW1 = b	0.75	1.0	1.25	—
Current consumption (transmission)	$I_{\text{CCT X}}$	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 672.5 MHz, -10 dBm $V_{\text{APC}} = 2.75 \text{ V}$	—	28	37	mA
Sleep current at transmission	I_{SL}	No signal, $V_{\text{APC}} = 0 \text{ V}$	—	0	10	μA
Transmission output level 1	P_{O1}	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 660 MHz, -10 dBm $V_{\text{APC}} = 2.75 \text{ V}$	-12	-8	—	dBm
Transmission output level 2	P_{O2}	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 685 MHz, -10 dBm $V_{\text{APC}} = 2.75 \text{ V}$	-12	-8	—	dBm

Note) 1. Refer to the "• Test circuit" for the SW1.

2. Unless otherwise specified :

At reception, $V_{\text{CC2}} = 3.0 \text{ V}$, $V_{\text{LO3}} = -10 \text{ dBm}$: $f = 233.15 \text{ MHz}$, V_{MI} : $f = 243.95 \text{ MHz}$, SW1 = a

V_{LI} : $f = 10.8 \text{ MHz}$ (Input level of pin 6 except for attenuation of the matching circuit and filter.)

V_{MO} and V_{LO} are in high impedance measurement. (V_{LM} is measured with probe load of 27 pF and 1 M Ω .)

V_{IS} is an input level V_{LI} at which RSSI output voltage becomes $V_{\text{S}(1)} + 0.15 \text{ V}$.

At transmission, $V_{\text{CC1}} = 3.0 \text{ V}$, IQ signal amplitude: 0.4 V (both phases), DC bias: 1.5 V, SW1 = a

$I_{\text{CCT X}}$: $\pi/4$ QPSK-modulated, P_{O1} and P_{O2} : PN9 stages modulated wave

Output frequency of P_{O1} : 1 893.174 MHz

Output frequency of P_{O2} : 1 918.174 MHz

■ Electrical Characteristics at $T_a = 25^\circ\text{C}$ (continued)

• Design reference data

Note) The characteristics listed below are theoretical values based on the IC design and are not guaranteed.

Parameter	Symbol	Conditions	Min	Typ	Max	Unit
1st local leak suppression amount	CL1	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 672.5 MHz, -10 dBm $V_{APC} = 2.75\text{ V}$	—	-25	—	dBc
2nd local leak suppression amount	CL2	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 672.5 MHz, -10 dBm $V_{APC} = 2.75\text{ V}$	—	-15	—	dBc
In-band output level deviation	ΔP	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 660 to 1 685 MHz, -10 dBm $V_{APC} = 2.75\text{ V}$	—	± 1.6	—	dB
Adjacent channel leak power suppression (600 kHz detuning)	BL1	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 672.5 MHz, -10 dBm $V_{APC} = 2.75\text{ V}$	—	-65	-60	dBc
Modulation precision	EVM	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 672.5 MHz, -10 dBm $V_{APC} = 2.75\text{ V}$	—	3	5	%[rms]
Minimum output level	P_{\min}	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 672.5 MHz, -10 dBm $V_{APC} = 1.0\text{ V}$	—	-45	-40	dBm
Image leak suppression	IL1	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 672.5 MHz, -10 dBm $V_{APC} = 2.75\text{ V}$ IQ: Level is of no adjustment	—	-35	—	dBc
$f_{LO1} + f_{LO2}$ local leak suppression amount	CL	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 672.5 MHz, -10 dBm $V_{APC} = 2.75\text{ V}$ IQ: DC offset is of no adjustment	—	-35	—	dBc
Proximity spurious suppression	DU	Lo1 = 233.15 MHz, -10 dBm Lo2 = 1 672.5 MHz, -10 dBm Adjust V_{APC} so as to get $P_O = -12\text{ dBm}$	—	-55	-51	dBc

Note) Unless otherwise specified:

At transmission, $V_{CC1} = 3.0\text{ V}$, $SW1 = a$

IQ signal: 0.4 V[p-p] (both phases), DC bias: 1.5 V

CL1, CL2, ΔP , BL1, EVM, P_{\min} , DU: PN9 stages modulated wave

IL1, CL: $\pi/4$ QPSK-modulated


■ Technical Data

Unless otherwise specified, the test condition is the same as "■ Electrical Characteristics".


Characteristics are the theoretical values and not guaranteed ones.

● Main characteristics (application circuit)


Wide band spurious characteristic

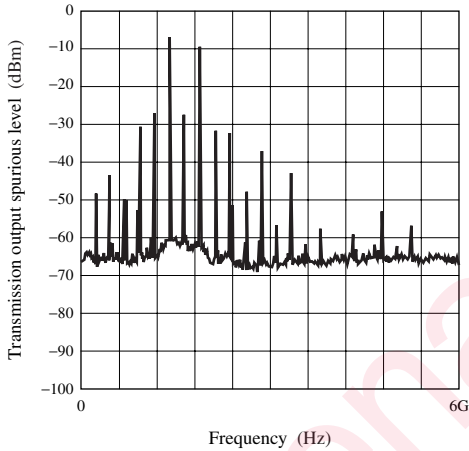


IM/mixer output — Mixer input

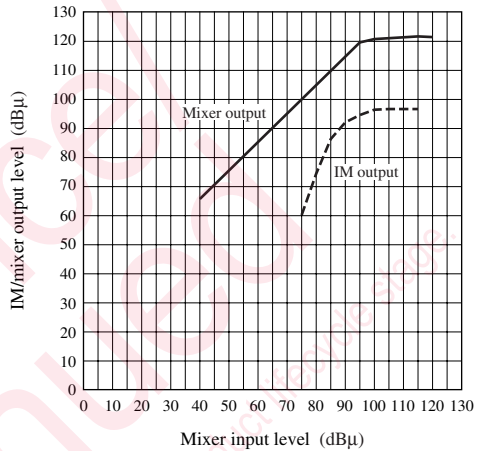


Mixer CG, NF characteristics — Local input

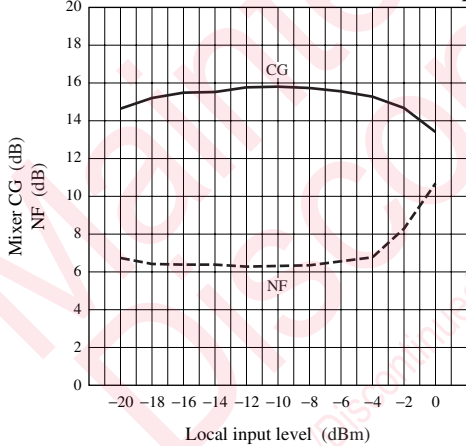


Limiter input/output characteristic

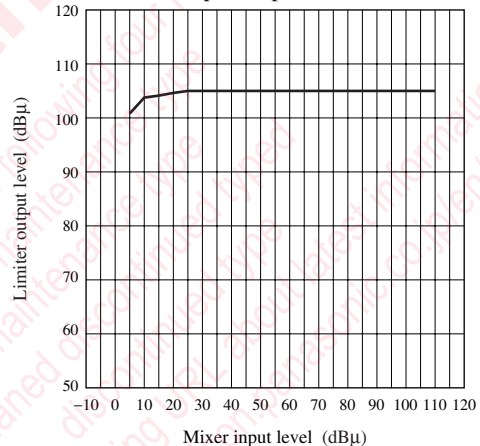

RSSI characteristic

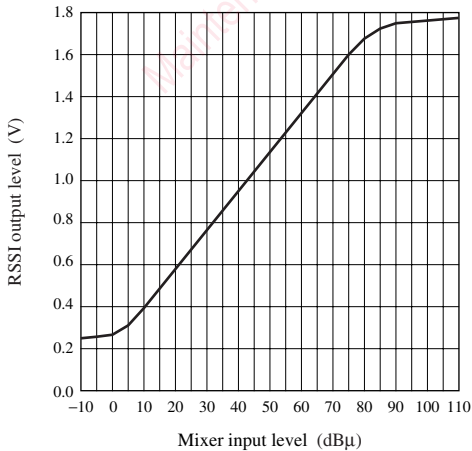


Mixer input/output characteristics

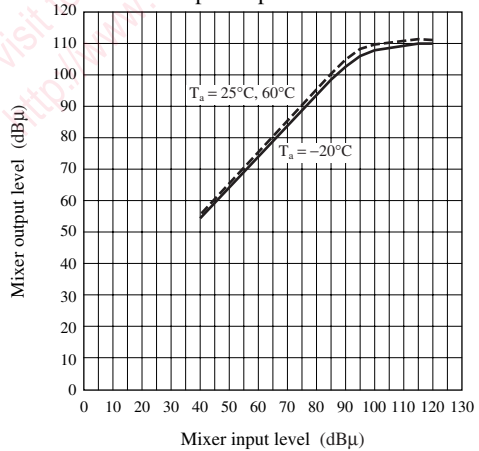


■ Technical Data (continued)

- Main characteristics (application circuit) (continued)


Limiter characteristics

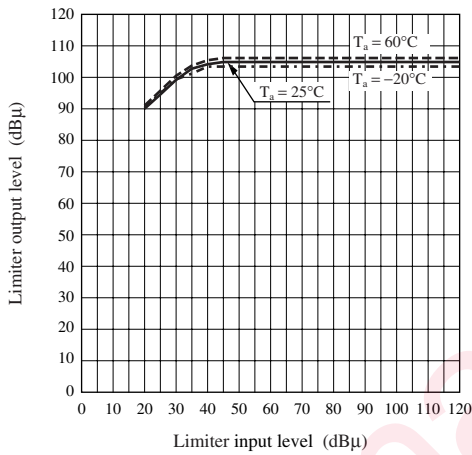

RSSI characteristics

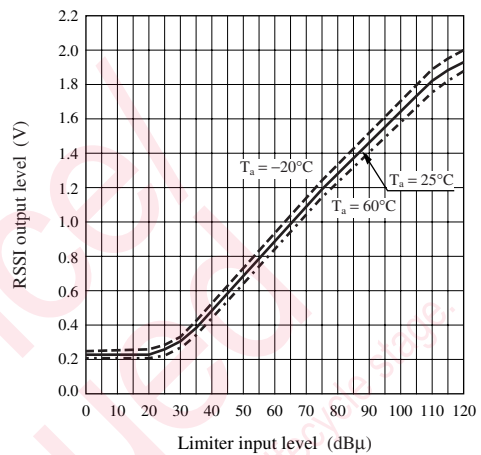

APC control voltage characteristics

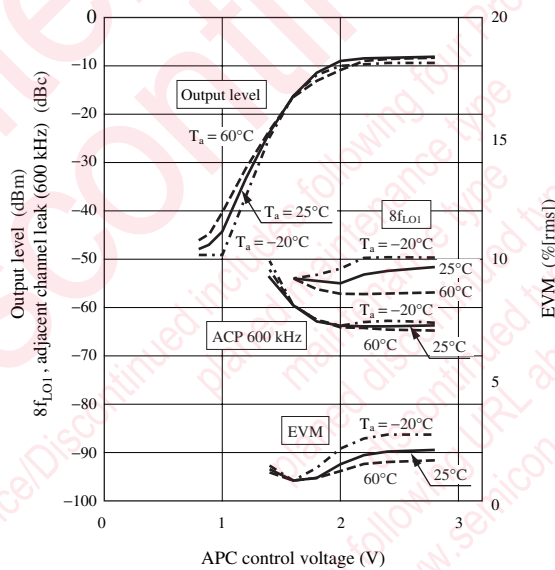

$V_{CC} = 3.0$ V


Lo1: 233.15 MHz, -10 dBm

Lo2: 1 672.5 MHz, -10 dBm

IQ: 0.4 V[p-p] (double phase), 1.5 V_{DC} ,
using PN9 stages continuous wave

■ New Package Dimensions (Unit: mm)

- SSOP024-P-0300D (Lead-free package)

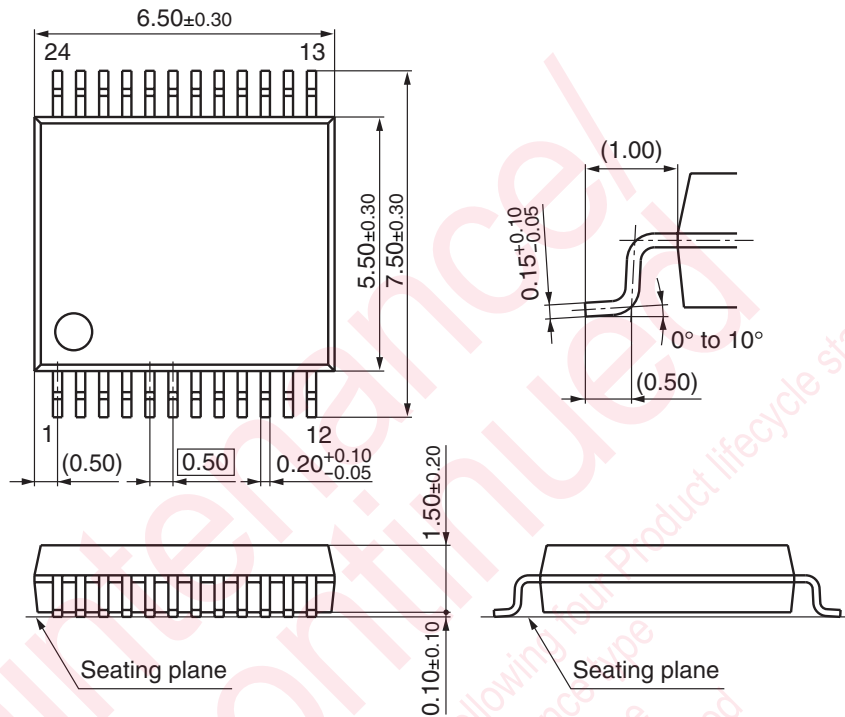

Maintenance/Discontinued includes following type
 Discontinued includes following type
 planned maintenance type
 maintenance type
 planned discontinued type
 discontinued type
 Please visit following URL about latest information.
<http://www.semicon.panasonic.co.jp/en/>

Request for your special attention and precautions in using the technical information and semiconductors described in this book

- (1) If any of the products or technical information described in this book is to be exported or provided to non-residents, the laws and regulations of the exporting country, especially, those with regard to security export control, must be observed.
- (2) The technical information described in this book is intended only to show the main characteristics and application circuit examples of the products, and no license is granted under any intellectual property right or other right owned by our company or any other company. Therefore, no responsibility is assumed by our company as to the infringement upon any such right owned by any other company which may arise as a result of the use of technical information described in this book.
- (3) The products described in this book are intended to be used for standard applications or general electronic equipment (such as office equipment, communications equipment, measuring instruments and household appliances).
Consult our sales staff in advance for information on the following applications:
 - Special applications (such as for airplanes, aerospace, automobiles, traffic control equipment, combustion equipment, life support systems and safety devices) in which exceptional quality and reliability are required, or if the failure or malfunction of the products may directly jeopardize life or harm the human body.
 - Any applications other than the standard applications intended.
- (4) The products and product specifications described in this book are subject to change without notice for modification and/or improvement. At the final stage of your design, purchasing, or use of the products, therefore, ask for the most up-to-date Product Standards in advance to make sure that the latest specifications satisfy your requirements.
- (5) When designing your equipment, comply with the range of absolute maximum rating and the guaranteed operating conditions (operating power supply voltage and operating environment etc.). Especially, please be careful not to exceed the range of absolute maximum rating on the transient state, such as power-on, power-off and mode-switching. Otherwise, we will not be liable for any defect which may arise later in your equipment.
 - Even when the products are used within the guaranteed values, take into the consideration of incidence of break down and failure mode, possible to occur to semiconductor products. Measures on the systems such as redundant design, arresting the spread of fire or preventing glitch are recommended in order to prevent physical injury, fire, social damages, for example, by using the products.
- (6) Comply with the instructions for use in order to prevent breakdown and characteristics change due to external factors (ESD, EOS, thermal stress and mechanical stress) at the time of handling, mounting or at customer's process. When using products for which damp-proof packing is required, satisfy the conditions, such as shelf life and the elapsed time since first opening the packages.
- (7) This book may be not reprinted or reproduced whether wholly or partially, without the prior written permission of Matsushita Electric Industrial Co., Ltd.