

# AP8048B Datasheet

**Audio Application Processor**  
**(ARM Cortex-M3 based)**

**Rev0.9**

## DISCLAIMER

All information and data contained in this document are without any commitment, are not to be considered as an offer for conclusion of a contract, nor shall they be construed as to create any liability. Any new issue of this document invalidates previous issues. Product availability and delivery are exclusively subject to our respective order confirmation form; the same applies to orders based on delivered development samples delivered. By this publication, Shanghai Mountain View Silicon Co., Ltd. (“MVSILICON”) does not assume responsibility for patent infringements or other rights of third parties that may result from its use.

No part of this publication may be reproduced, photocopied, stored in a retrieval system, or translated in any form or by any means, electronic, mechanical, manual, optical, or otherwise, without the prior written permission of Shanghai Mountain View Silicon Co., Ltd.

Shanghai Mountain View Silicon Co., Ltd. assumes no responsibility for any errors contained herein.

## Revision History

Date	Revision	Description
2014-3-12	V0.5	Change pin19's name
2014-3-18	V0.6	Change power supply voltage value
2014-04-11	V0.7	Add the pin function table, LDO330 V-I chart and the store/reflow requirements
2016-01-18	V0.8	Revised the description of chip features
2016-03-20	V0.9	Add the Codec's functional block

## Contents

1. Overview.....	1
1.1 Features.....	1
1.2 CODEC Functional Block.....	2
2. Pin Description.....	2
2.1 Pin Description.....	3
3. Package.....	5
3.1 Package Diagram.....	5
3.2 Package Dimension Parameter.....	6
4. Electrical Specification.....	7
4.1 Absolute Maximum Ratings (Note 1).....	7
4.2 Recommended Operating Conditions.....	7
4.3 Electrical Characteristics.....	7
4.4 LDO330 driving capability.....	7
4.5 Audio Performance.....	8
5. Store and Reflow.....	11
Contact Information.....	12

## Figures

Figure 1 CODEC Functional Block.....	2
Figure 2 Package Diagram (LQFP48-7x7mm / TOP View).....	5
Figure 3 LQFP48-7x7mm Package Dimension Parameter.....	6
Figure 4 LDO330 driving capability.....	7

## Tables

Table 1 Pin Description .....	3
Table 2 GPIO Pin Function.....	3
Table 3 Absolute Maximum Ratings .....	7
Table 4 Recommended Operating Conditions.....	7
Table 5 Electrical Characteristics.....	7
Table 6 Audio DAC Performance .....	8
Table 7 DAC LINE-IN (high quality) Channel Characteristics.....	9
Table 8 LINE-IN (normal quality) Channel Characteristics.....	10
Table 9 MIC Channel Characteristics.....	10

# 1. Overview

As a highly integrated SoC for audio application processing, AP8048B integrates ARM Cortex-M3, OTG, SD/MMC card controller, SARADC, audio DAC, audio ADC, RTC and IR decoder in a single chip. AP8048B supports Bluetooth stack, various audio decoders, encoders, and effects. In general AP8048B offers low power consumption, flexible and more powerful wireless audio player solution.

## 1.1 Features

- ARM Cortex-M3, running @ 96MHz, with 128K byte SRAM
- Embedded LDO, with 3.3V output
- OTG 2.0 full-speed controller
- SD/MMC card controller
- 12-bit SARADC
- Low power RTC with NVM to save external RTC & EEPROM
- High speed UART with flow control
- Multiple PWM outputs
- IR (NEC) decoder and
- Multiple GPIOs for various purposes
- Code encryption mechanism in SPI-flash
- Support FAT16/FAT32 file system
- Bluetooth stack including A2DP, AVRCP, HFP, SPP, OBEX etc
  
- Audio input and output
  - Stereo 20-bit high quality Audio DAC, SNR  $\geq 95$ dB
  - Stereo 16-bit high quality Sigma Delta ADC, SNR  $\geq 90$ dB
  - Programmable preamp gain for input from microphone and line-in
  - Programmable ALC / Noise Gate
  - Built-in headphone driver with “capless” option
    - ◆  $>40$ mW output power into  $16\Omega / 3.3V$
    - ◆ THD  $-80$ dB at 20mW, SNR 90dB with  $16\Omega$  load
  - Tone generator
  - 9 sample rates supported: 8kHz, 11.025 kHz, 12 kHz, 16 kHz, 22.05 kHz, 24 kHz, 32 kHz, 44.1 kHz, 48kHz
  
- Audio Algorithms
  - Decoders: MP2/MP3, WMA, FLAC(8/16/24bit), AAC/MP4/M4A, WAV(IMA-ADPCM and raw PCM), AIF, AIFC

- Encoder: MP2/MP3, IMA-ADPCM
- Effects:
  - ◆ Echo
  - ◆ Reverb
  - ◆ MV3D
  - ◆ MVBASS
  - ◆ Pitch shifter
  - ◆ Parametric EQ
  - ◆ Dynamic Range Compression (DRC)
  - ◆ Acoustic Echo Cancellation (AEC)
  - ◆ Programmable frequency shifter for howling prevention
  - ◆ Fast and accurate howling detection and suppression

- Serial wire debug (SWD) interface
- Firmware updatable through SD/USB drive

## 1.2 CODEC Functional Block

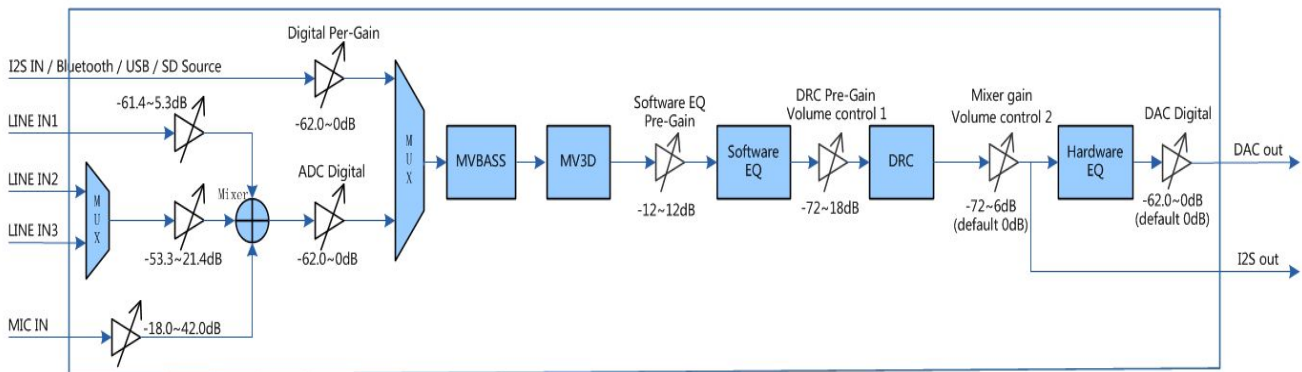


Figure 1 CODEC Functional Block

Notes.

1. Adjust the system volume either through DRC pre-gain (DRC on) or mixer gain (DRC off).
2. Direct control of DAC digital volume is NOT recommended

## 2. Pin Description

AP8048B is a CMOS device. Floating level on input signals causes unstable device operation and abnormal current consumption. Pull-up or Pull-down resistors should be used appropriately for input or bidirectional pins.

Notation	Description
I	Input
O	Output
I/O	Bidirectional
PWR	Power
GND	Ground

## 2.1 Pin Description

Table 1 Pin Description

Pin name	Pin #	Type	Description
<b>Audio CODEC interface pins</b>			
<b>DAC_R</b>	6	AO	audio right channel output
<b>DAC_L</b>	7	AO	audio left channel output
<b>DACVMID</b>	5	AI	Internal voltage reference
<b>DAC_LINER</b>	9	AI	Audio aux right in (high quality)
<b>DAC_LINEL</b>	10	AI	Audio aux left in (high quality)
<b>MICIN</b>	11	AI	MIC input
<b>MICBIAS</b>	12	AI	MIC voltage reference
<b>GPIO/MCU IO pins</b>			
<b>GPIO_A[0]</b>	20	I/O	GPIO PORT, bank A
<b>GPIO_A[25:13]</b>	33:21	I/O	GPIO PORT, bank A
<b>GPIO_B[8:5]</b>	37:34	I/O	GPIO PORT, bank B
<b>GPIO_B[22]</b>	41	I/O	GPIO PORT, bank B
<b>GPIO_B[29:24]</b>	47:42	I/O	GPIO PORT, bank B
<b>GPIO_B[31]</b>	48	I/O	GPIO PORT, bank B
<b>GPIO_C[0]</b>	1	I/O	GPIO PORT, bank C
<b>GPIO_C[14:13]</b>	3:2	I/O	GPIO PORT, bank C
<b>CLK pins</b>			
<b>XIN</b>	14	I	32.768KHz Crystal oscillator input for PLL
<b>XOUT</b>	13	O	32.768KHz Crystal oscillator output for PLL
<b>Power/Ground pins</b>			
<b>DVSS</b>	38	GND	ground for digital
<b>LDOIN</b>	16	PWR	LDO power in
<b>LDO330</b>	15	PWR	LDO 3.3V out
<b>LDO120</b>	18	PWR	LDO 1.2V out
<b>IOVDD</b>	40	PWR	IO 3.3V
<b>COREVDD</b>	39	PWR	1.2V for corevdd
<b>RTCVDD</b>	19	PWR	power for RTC
<b>DACVDD</b>	8	PWR	power for DAC
<b>DACAVSS</b>	4	GND	ground for DAC
<b>MISC pins</b>			
<b>POWER_KEY</b>	17	I	Power Key

Table 2 GPIO Pin Function

Pin Name	Other Function Assignment
<b>GPIO_A[0]</b>	PWM0 / UART_TX / CHARGE-LED
<b>GPIO_A[13]</b>	FSH_HOLD
<b>GPIO_A[14]</b>	FSH_SCK

<b>GPIO_A[15]</b>	FSH_SI
<b>GPIO_A[16]</b>	FSH_WP
<b>GPIO_A[17]</b>	FSH_SO
<b>GPIO_A[18]</b>	FSH_CS
<b>GPIO_A[19]</b>	SD1_DAT / SPIM1_MISO
<b>GPIO_A[20]</b>	SD1_CLK / SPIM1_CLK
<b>GPIO_A[21]</b>	SD1_CMD / SPIM1_MOSI
<b>GPIO_A[22]</b>	USB2_DP
<b>GPIO_A[23]</b>	USB2_DM
<b>GPIO_A[24]</b>	BUART_RX / USB1_DP
<b>GPIO_A[25]</b>	BUART_TX / USB1_DM
<b>GPIO_B[5]</b>	ADC0 / WAKEUP
<b>GPIO_B[6]</b>	ADC1 / PWM4 / UART_RX / WAKEUP
<b>GPIO_B[7]</b>	ADC2 / IR1 / PWC1 / PWM5 / UART_TX / WAKEUP
<b>GPIO_B[8]</b>	BUART_RX / PWM6
<b>GPIO_B[22]</b>	ADC3 / PWM5 / WAKEUP
<b>GPIO_B[24]</b>	ADC5 / I2S1_LRCK / PCM1_SYNC / PWM3 / WAKEUP
<b>GPIO_B[25]</b>	ADC6 / I2S1_BCLK / PCM1_CLK / PWM2 / WAKEUP
<b>GPIO_B[26]</b>	I2S1_DO / PCM1_DO / PWM1 / TK0
<b>GPIO_B[27]</b>	I2S1_DIN / PCM1_DIN / PWM0 / TK1
<b>GPIO_B[28]</b>	BUART_TX / TK2
<b>GPIO_B[29]</b>	BUART_RX / TK3
<b>GPIO_B[31]</b>	12M_16M_OUT1 / BUART_RTS / TK5
<b>GPIO_C[0]</b>	32K_OUT2 / BUART_CTS / TK_CMPOUT
<b>GPIO_C[13]</b>	LINE1_L(normal quality) / SWCLK
<b>GPIO_C[14]</b>	LINE1_R(normal quality) / SWD

Notes.

3. 'TK' is drive pin for touch key function.
4. 'CHARGE-LED' is a function for indicating the charge status of battery even in power down mode.
5. All GPIOs can be used as external interrupt pins.
6. For each of the following modules, only one port group can be activated at any given time, e.g., either USB1 or USB2 can be activated, but not both at the same time.

Module	Port Groups
<b>USB</b>	USB1, USB2

7. For the following modules, there are two scenarios:

Scenario 1, the signal bus can be activated separately, e.g., use UART\_TX or UART\_RX only;

Scenario 2, only one port can be allocated to the signal bus at any given time, e.g., UART\_TX can be allocated to GPIO\_A[0] or GPIO\_B[7].

Module	Signal Bus	Ports
<b>UART</b>	UART_TX	GPIO_A[0], GPIO_B[7]
	UART_RX	GPIO_B[6]
<b>BUART</b>	BUART_TX	GPIO_A[25], GPIO_B[28]
	BUART_RX	GPIO_A[24], GPIO_B[8], GPIO_B[29]
	BUART_CTS	GPIO_C[0]
	BUART_RTS	GPIO_B[31]

### 3. Package

#### 3.1 Package Diagram

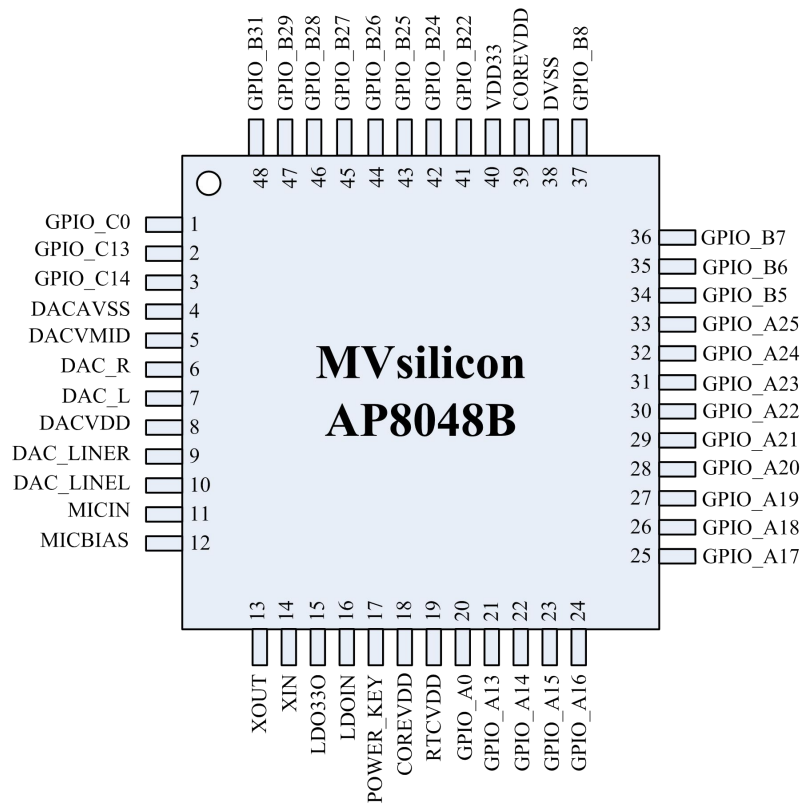


Figure 2 Package Diagram (LQFP48-7x7mm / TOP View)



### 3.2 Package Dimension Parameter

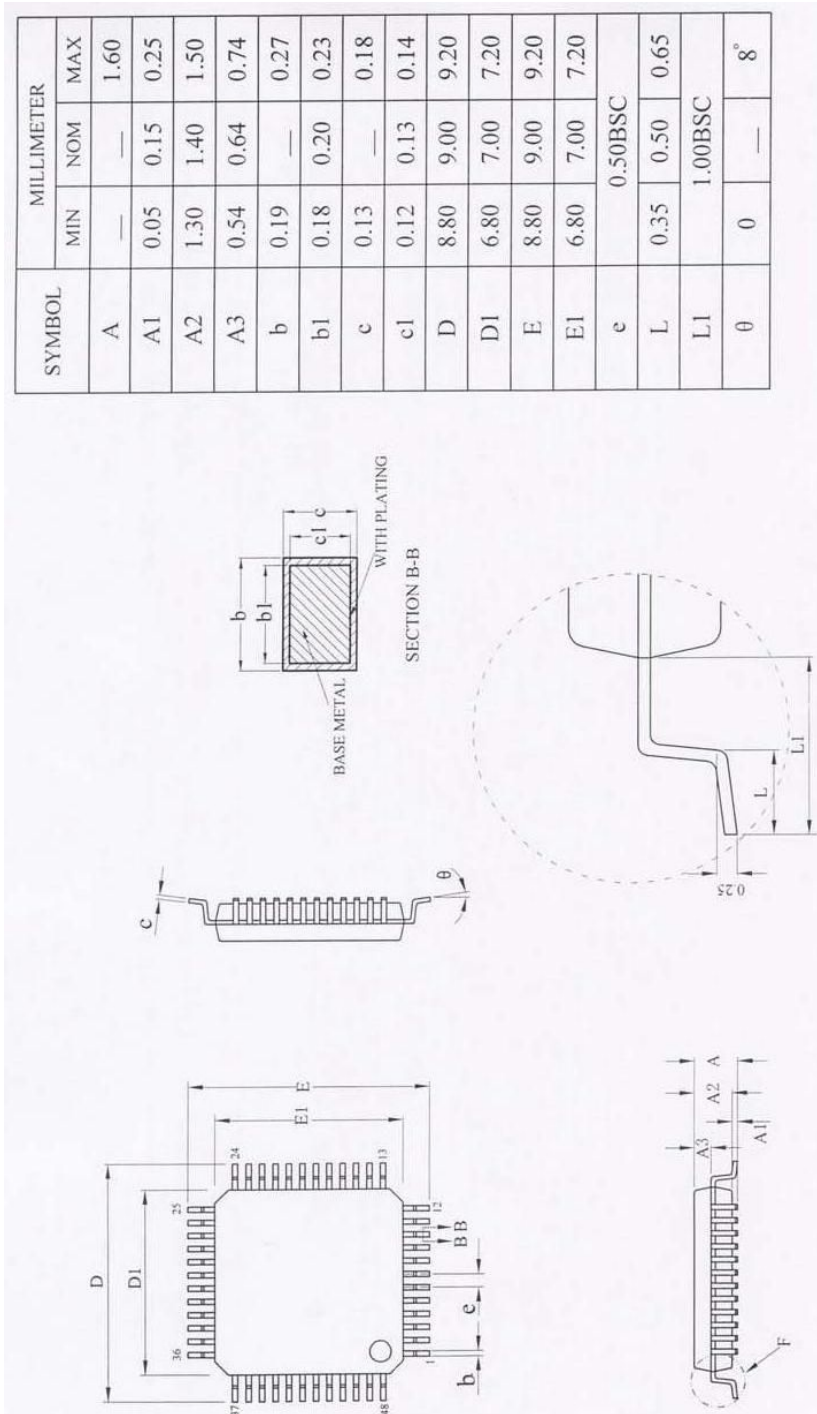


Figure 3 LQFP48-7x7mm Package Dimension Parameter

## 4. Electrical Specification

### 4.1 Absolute Maximum Ratings (Note 1)

Table 3 Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit
Storage Temperature	TEMP_STG	-65 to 150	C

### 4.2 Recommended Operating Conditions

Table 4 Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Power Supply Voltage	LDOIN	3.35	5.0	5.5	V
IO Input Voltage	VIN	0		3.6	V
Operating Free Air Temperature	TEMP_OPR	-40		85	C

### 4.3 Electrical Characteristics

Table 5 Electrical Characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Unit
VIH	Input High Voltage		1.6		3.6	V
VIL	Input Low Voltage		-0.3		1.4	V
VOH	Output high voltage	@IOH=2mA	3.0			V
VOL	Output low voltage	@IOL=2mA			0.3	V
IL	Input leakage current		-10		10	uA
P_PLAY current	Current consumption when playing	Playing mode		30		mA
RTC current	Current consumption for RTC & NVM			16		uA

### 4.4 LDO330 driving capability

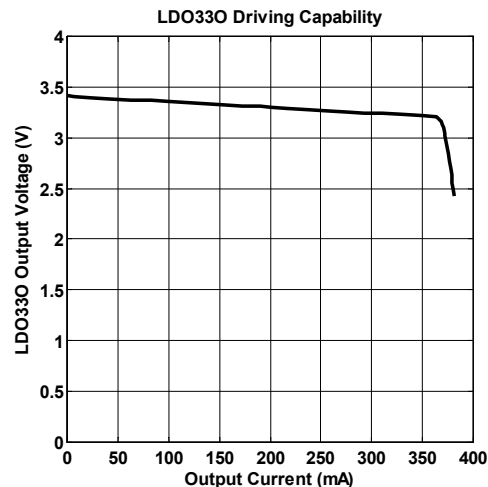



Figure 4 LDO330 driving capability

Note. Not fully tested, characterized only; 2, LDOIN=5V, T<sub>A</sub>=25°C

## 4.5 Audio Performance

Table 6 Audio DAC Performance


PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Dynamic Range	No Filter		93.6/93.6		dB
	With A-Weighted Filter		95/95		dB
Signal-to-Noise Ratio	No Filter		95.5/95.6		dB
	With A-Weighted Filter		98/98		dB
THD+N	Peak THD+N (@0dBFS)		-81/-81		dB
	0dBFS		-75/-75		dB
Frequency Response			0.06		dBV
Output Swing			0.993		Vrms
Inter-channel Gain Mismatch			0.003		dB
Volume Control Step			TBD		dB
Volume Control Range			TBD		dB
Group Delay			80		us
Inter-channel Phase Deviation			0.01		degree
Crosstalk			-99/-98		dB

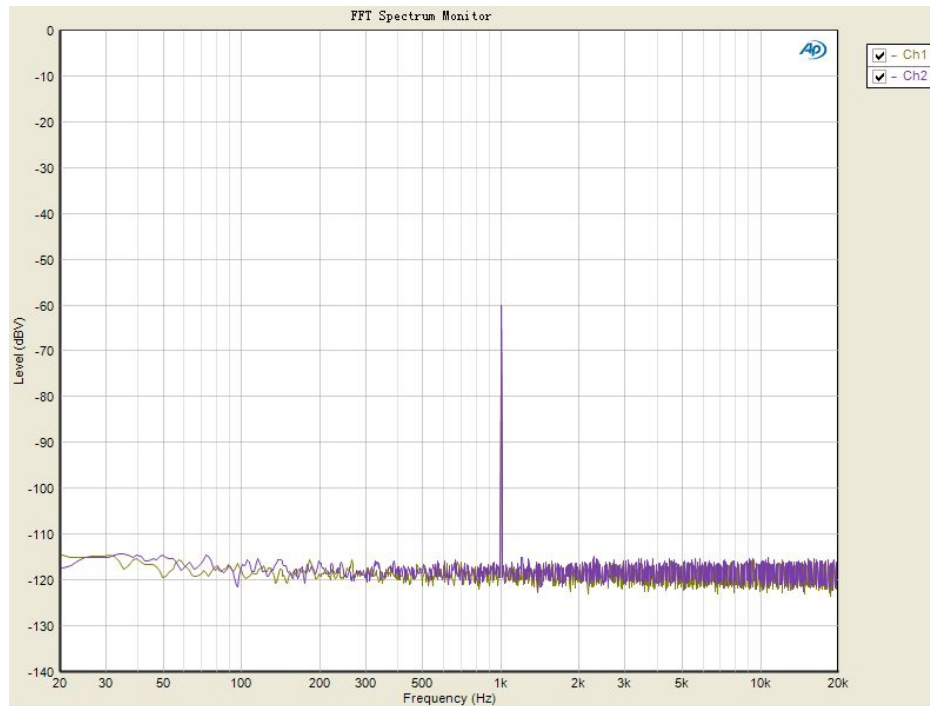

The measured output audio spectrum when the output is at -60 dBV

Table 7 DAC LINE-IN (high quality) Channel Characteristics

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Dynamic Range	No Filter		88/88		dB
	With A-Weighted Filter		90/90		dB
Signal-to-Noise Ratio	No Filter		88/88		dB
	With A-Weighted Filter		90/90		dB
THD+N	Peak THD+N (@-2.4dBFS)		-84/-84		dB
Volume Control Step			TBD		dB
Volume Control Range			TBD		dB
Group Delay			26		fs
Power Consumption			7.6		mW
Power Supply Rejection Ratio	1kHz, 300mVrms		55		dB

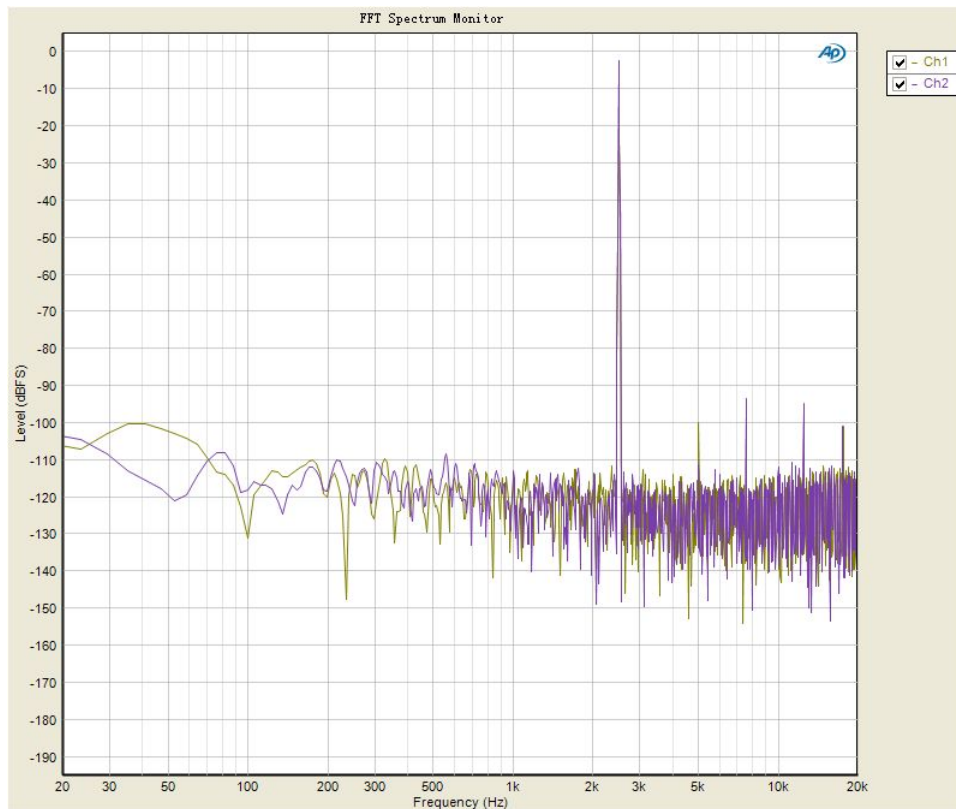

The measured audio spectrum when the analog input is at -2.6 Dbv

Table 8 LINE-IN (normal quality) Channel Characteristics

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Dynamic Range	No Filter		86		dB
	With A-Weighted Filter				dB
Signal-to-Noise Ratio	No Filter		85		dB
	With A-Weighted Filter				dB
THD+N	Peak THD+N (@-12dBFS)		-75		dB
Group Delay			26		fs
Power Consumption			7.6		mW
Power Supply Rejection Ratio	1kHz, 300mVrms		55		dB

Table 9 MIC Channel Characteristics

PARAMETER	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Dynamic Range	No Filter		87.5/87.5		dB
	With A-Weighted Filter		90/90		dB
Signal-to-Noise Ratio	No Filter		85.5/85.5		dB
	With A-Weighted Filter		88.5/88.5		dB
THD+N	Peak THD+N (@-2dBFS)		-82/-82		dB
Group Delay			26		fs
Crosstalk			TBD		dB
Power Consumption			7.6		mW
Power Supply Rejection Ratio	1kHz, 300mVrms		55		dB

Note:

1. “Absolute Maximum Ratings” are those values beyond which the safety of the device cannot be guaranteed. They are not meant to imply that the device should be operated at these limits.

## 5. Store and Reflow

AP8048B is a moisture sensitive component. The moisture sensitivity classification is **Class 3**.

It's important that the parts are handled under precaution and a proper manner.

The handling, baking and out-of-pack storage conditions of the moisture sensitive components are described in IPC/JEDC S-STD-033A.

The Technologies recommends utilizing the standard precautions listed below.

1. Calculated shelf life in Sealed Bag: 12 months at  $<40^{\circ}\text{C}$  and  $<90\%$  relative humidity(RH)
2. Peak Package Body Temperature:  $250^{\circ}\text{C}$
3. After bag is opened, devices that will be subjected to reflow solder of other high temperature process must be:
  - a. Mounted within 168 hours of factory condition  $\leq 30^{\circ}\text{C}$  / 60% RH
  - b. Stored at  $<10\%$  RH if not used
4. Devices require baking, before mounting if:
  - a. Humidity indicator card is  $>10\%$  when read at  $23\pm 5^{\circ}\text{C}$  immediately after moisture barrier bag is opened
  - b. Items 3a or 3b is not met
5. If baking is required, please refer to J-STD-033 standard for low temperature ( $40^{\circ}\text{C}$ ) baking requirement in Tape/Reel form.

## Contact Information

Shanghai Mountain View Silicon Co Ltd

Shanghai Headquarter:

Suite 4C, Hengyue International Building 3, 1238 Zhangjiang Road,  
Shanghai, P.R. China

Zip code: 201203

Tel: 86-21-68549851/68549853/68549857

Fax: 86-21-61630162

Shenzhen Sales & Technical Support Office:

Suite 6A Olympic Plaza, Shangbao Road, Futian District,  
Shenzhen, Guangdong, P.R. China

Zip code: 518034

Tel: 86-755-83522955

Fax: 86-755-83522957

Email: [support@mvsilicon.com](mailto:support@mvsilicon.com)

Website: <http://www.mvsilicon.com>