

## DATA SHEET

### GAS DISCHARGE TUBE – 2R-6 SERIES


#### FEATURES

- ✧ Provide ultra-fast response to surge voltage from slow-rising surge of 100V/s to rapid-rising surge of 1KV/μs.
- ✧ Stable breakdown voltage.
- ✧ High insulation resistance.
- ✧ Low capacitance (≤1pF).
- ✧ High holdover voltage.
- ✧ Large absorbing transient current capability.
- ✧ Micro-Gap Design
- ✧ Size:6.2mm\*4.2mm
- ✧ Storage and operational temperature: -40℃ ~ +85℃
- ✧ Meets MSL level 1, per J -STD-020


#### APPLICATION

- ✧ Repeaters, Modems.
- ✧ Telephone Interface, Line cards.
- ✧ Data communication equipment.
- ✧ Line test equipment.

#### PART NUMBER CODE

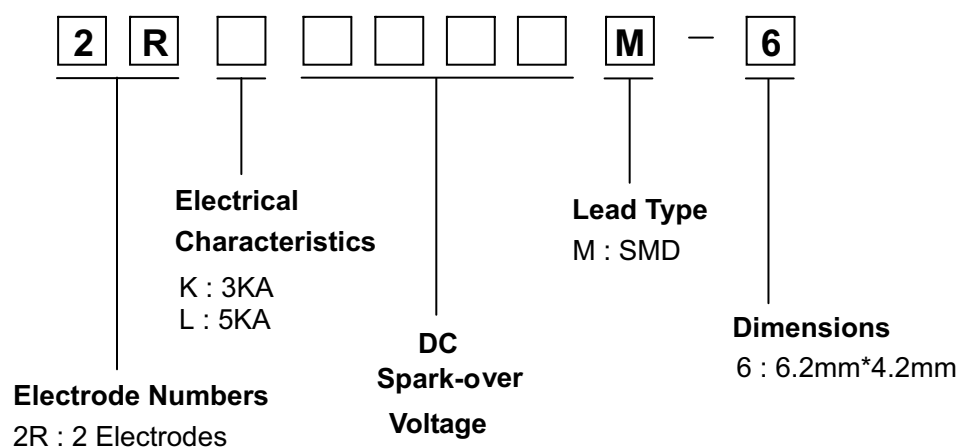

**DIMENSIONS**

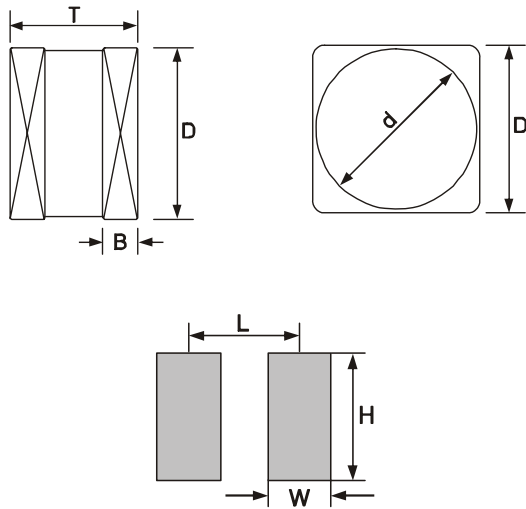

unit :mm


Items	Dimension	
	Spec.	Tolerance
D	6.2	±0.2
T	4.2	±0.2
B	0.8	±0.1
d	6.0	±0.2
L	3.5	-
H	7.0	-
W	1.3	-

**Recommended Pad Size**

**ELECTRICAL CHARACTERISTIC**

Part Number	DC Spark-over Voltage	Maximum Impulse Spark-over Voltage	Nominal Impulse Discharge Current	Alternating Discharge Current	Impulse Life	Minimum Insulation Resistance		Maximum Capacitance	Device Marking Code
	100V/s	1000V/μs	8/20μs, 10times	50Hz, 1sec	10/1000μs, 100A	Test Voltage	(GΩ)	1MHz	
	(V)	(V)	(KA)	(A)	(times)	DC(V)		(pF)	
2RL075M-6	75±20%	700	5	5	500	25	1	1.0	2RL075-6
2RL090M-6	90±20%	700	5	5	500	50	1	1.0	2RL090-6
2RL145M-6	145±20%	700	5	5	500	100	1	1.0	2RL145-6
2RL150M-6	150±20%	700	5	5	500	100	1	1.0	2RL150-6
2RL230M-6	230±20%	650	5	5	500	100	1	1.0	2RL230-6
2RL250M-6	250±20%	650	5	5	500	100	1	1.0	2RL250-6
2RL300M-6	300±20%	700	5	5	500	100	1	1.0	2RL300-6
2RL350M-6	350±20%	750	5	5	500	100	1	1.0	2RL350-6
2RL400M-6	400±20%	800	5	5	500	100	1	1.0	2RL400-6
2RL470M-6	470±20%	900	5	5	500	250	1	1.0	2RL470-6
2RL600M-6	600±20%	1000	5	5	500	250	1	1.0	2RL600-6
2RL800M-6	800±20%	1200	5	5	500	250	1	1.0	2RL800-6
2RK1000M-6	1000±20%	1600	3	3	300	500	1	1.0	2RK1000-6
2RK1200M-6	1200±20%	1800	3	3	300	500	1	1.0	2RK1200-6
2RK1800M-6	1800±20%	2600	3	3	300	500	1	1.0	2RK1800-6
2RK2000M-6	2000±20%	2800	3	3	300	500	1	1.0	2RK2000-6
2RK2500M-6	2500±20%	3200	3	3	300	1000	1	1.0	2RK2500-6
2RK2700M-6	2700±20%	3400	3	3	300	1000	1	1.0	2RK2700-6
2RK3000M-6	3000±20%	3700	3	3	300	1000	1	1.0	2RK3000-6

**ELECTRICAL RATING**

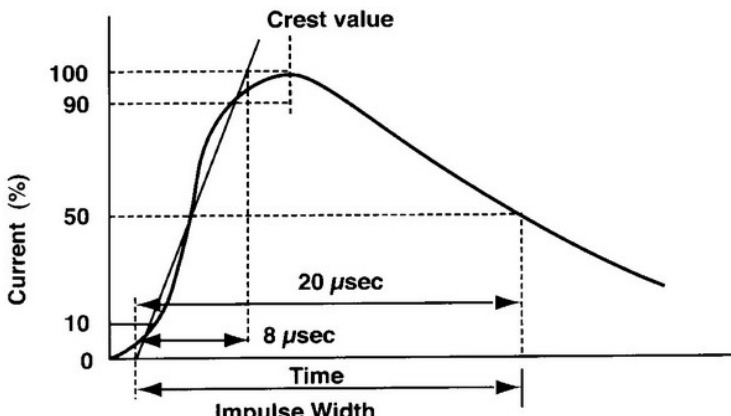Item	Test Condition / Description	Requirement
DC Spark-over Voltage	The voltage is measured with a low rate of rise $dv / dt=100V/s$	
Maximum Impulse Spark-over Voltage	The maximum impulse breakdown voltage is measured with a rise time of $dv / dt=1000V/\mu s$	
Impulse Discharge Current	<p>The maximum current applying a waveform of 8/20<math>\mu s</math> that can be applied across the terminals of the gas tube without causing the gas tube to change more than <math>\pm 25\%</math> from its initial measured DC breakdown voltage. Dwell time between pulses is 3 minutes.</p> 	To meet the specified value
Alternating Discharge Current	<p>Rated RMS value of AC current at 50Hz, 1 sec. 10 times. Intervals: 3min. DC breakdown voltage may not change more than <math>\pm 25\%</math> from its initial measured DC breakdown voltage. <math>IR &gt; 10^8</math> ohms (-20%, +30% for 70 – 90V).</p>	
Insulation Resistance	The resistance of gas tube shall be measured each terminal each other terminal. please see above spec	
Capacitance	<p>The capacitance of gas tube shall be measured each terminal to each other terminal. Test frequency : 1MHz</p>	