



SAW Components

Data Sheet B3671





SAW Components

B3671

Low-Loss Filter

204,0 MHz

Data Sheet


Features

- Low-loss IF filter for S-CDMA applications
- 500 kHz usable bandwidth
- Temperature stable
- Ceramic SMD package

Terminals

- Gold plated


Ceramic package **QCC10B**

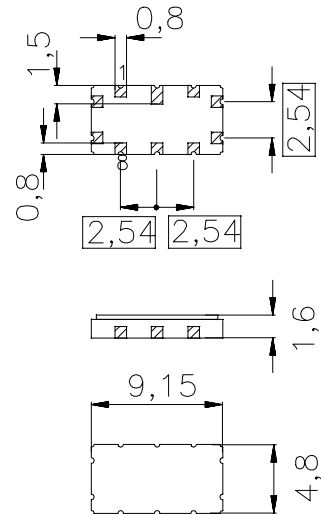

Dimensions in mm, approx. weight 0,2 g

Pin configuration

- | | |
|------------|---------------|
| 10 | Input |
| 9 | Input ground |
| 5 | Output |
| 4 | Output ground |
| 2, 7 | Ground |
| 1, 3, 6, 8 | Case ground |

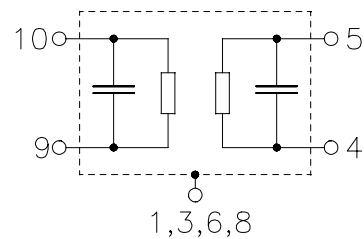

Type	Ordering code	Marking and Package according to	Packing according to
B3671	B39201-B3671-Z710	C61157-A7-A49	F61074-V8035-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	-40 / +80	°C	
Storage temperature range	T_{stg}	-40 / +85	°C	
DC voltage	V_{DC}	0	V	
Source power	P_s	0	dBm	


SAW Components
B3671
Low-Loss Filter
204,0 MHz
Data Sheet
Characteristics

Operating temperature range:

 $T = 0 \dots 70 \text{ }^\circ\text{C}$

Terminating source impedance:

 $Z_S = 50 \text{ } \Omega$ and matching network

Terminating load impedance:


 $Z_L = 50 \text{ } \Omega$ and matching network

		min.	typ.	max.	
Nominal frequency	f_N	—	204,0	—	MHz
Minimum insertion attenuation	α_{\min}	—	9,0	10,0	dB
Pass bandwidth					
	$\alpha_{\text{rel}} \leq 1,0 \text{ dB}$		720	—	kHz
	$\alpha_{\text{rel}} \leq 3,0 \text{ dB}$		1150	—	kHz
Amplitude ripple (p-p)	$\Delta\alpha$				
	$f_N \pm 250 \text{ kHz}$	—	0,5	1,0	dB
Absolute group delay	τ				
	@ f_N	—	0,8	—	μs
Group delay ripple (p-p)	$\Delta\tau$				
	$f_N \pm 250 \text{ kHz}$	—	30	100	ns
Relative attenuation (relative to α_{\min})	α_{rel}				
	$f_N - 10,0 \text{ MHz} \dots f_N - 3,8 \text{ MHz}$	45	50	—	dB
	$f_N - 3,8 \text{ MHz} \dots f_N - 3,2 \text{ MHz}$	44	46	—	dB
	$f_N - 3,2 \text{ MHz} \dots f_N - 2,5 \text{ MHz}$	45	50	—	dB
	$f_N + 2,5 \text{ MHz} \dots f_N + 2,6 \text{ MHz}$	44	46	—	dB
	$f_N + 2,6 \text{ MHz} \dots f_N + 3,5 \text{ MHz}$	45	50	—	dB
	$f_N + 3,5 \text{ MHz} \dots f_N + 4,5 \text{ MHz}$	43	45	—	dB
	$f_N + 4,5 \text{ MHz} \dots f_N + 10,0 \text{ MHz}$	45	50	—	dB
Temperature coefficient of frequency ¹⁾	TC_f	—	-0,036	—	ppm/K ²
Turnover temperature	T_0	—	35	—	$^\circ\text{C}$

¹⁾ Temperature dependence of f_c : $f_c(T_A) = f_c(T_0)(1 + TC_f(T_A - T_0)^2)$



Matching network to 50 Ω (Element values depend on PCB layout)

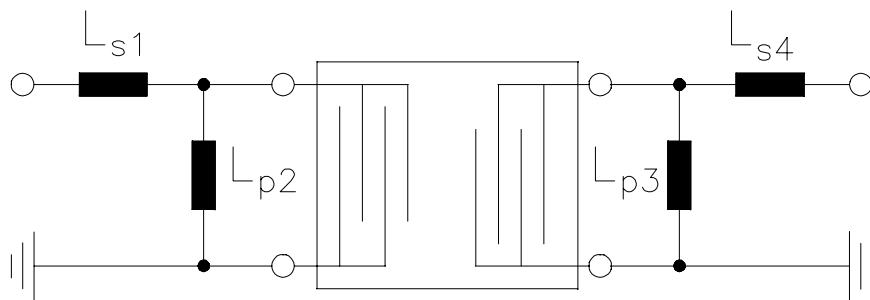

$$L_{s1} = 120 \text{ nH}$$

$$L_{p2} = 120 \text{ nH}$$


$$L_{p3} = 150 \text{ nH}$$

$$L_{s4} = 100 \text{ nH}$$




Data Sheet

Normalized frequency response

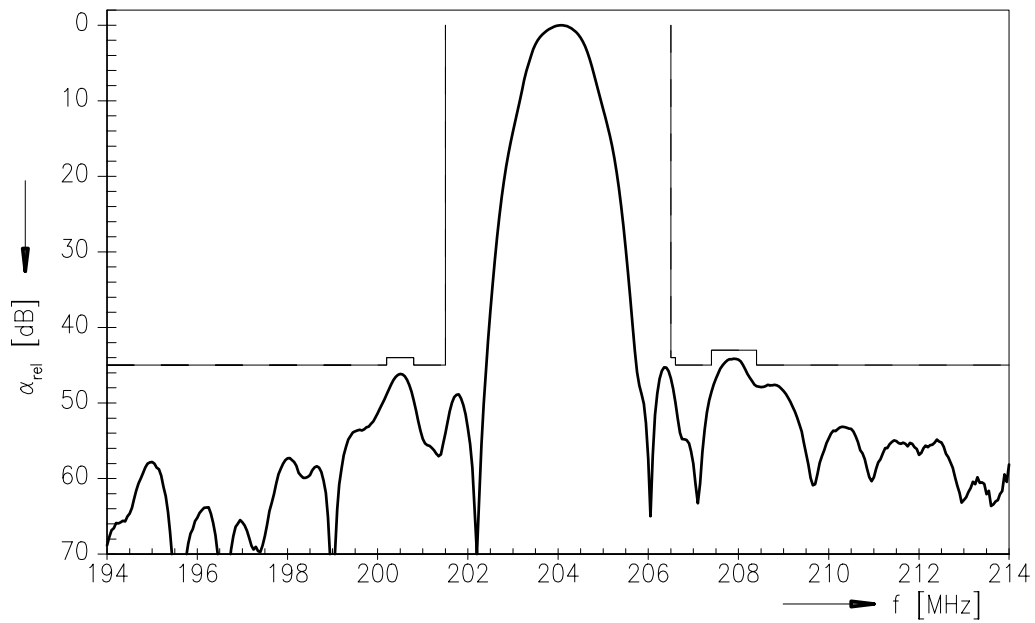

Normalized frequency response (pass band)

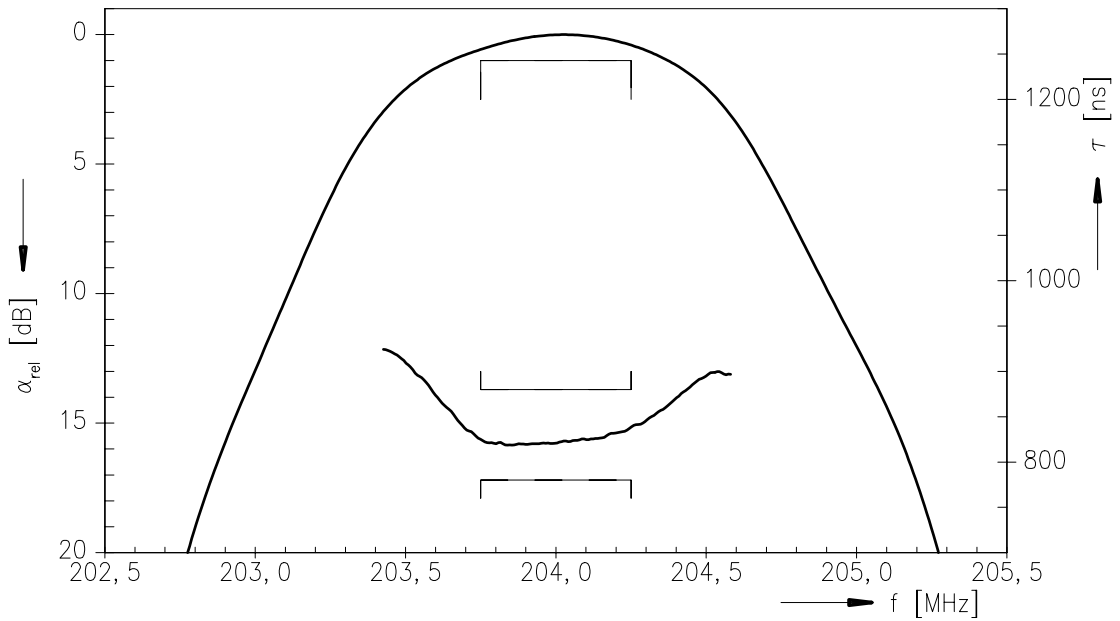



SAW Components

B3671

Low-Loss Filter

204,0 MHz

Data Sheet

Published by EPCOS AG
Surface Acoustic Wave Components Division, OFW E NK
P.O. Box 80 17 09, D-81617 München

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.