



# SAW Components

Data Sheet B3677





SAW Components

B3677

Low-Loss Filter

374,0 MHz

Data Sheet


Ceramic package QCC8C

Features

- Low-loss IF filter
- Ceramic SMD package
- Balanced or unbalanced operation

Terminals


- Gold plated

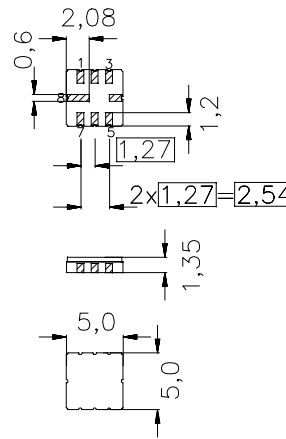

typ. Dimensions in mm, approx. weight 0,1 g

Pin configuration

- 3 Input
- 2 Input or input ground
- 7 Output
- 6 Output or output ground
- 4, 8 Case ground
- 1, 5 To be grounded



Type	Ordering code	Marking and Package according to	Packing according to
B3677	B39371-B3677-U310	C61157-A7-A56	F61074-V8070-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	$T_A$	-45 / +85	°C
Storage temperature range	$T_{stg}$	-45 / +85	°C
DC voltage	$V_{DC}$	0	V
Source power	$P_s$	10	dBm


**SAW Components**
**B3677**
**Low-Loss Filter**
**374,0 MHz**
**Data Sheet**
**Characteristics**

Operating temperature:

$T_A = -10 \dots 80 \text{ }^\circ\text{C}$

Terminating source impedance:

$Z_S = 50 \text{ } \Omega \text{ unbalanced and matching network}$

Terminating load impedance:

$Z_L = 50 \text{ } \Omega \text{ unbalanced and matching network}$


			min.	typ.	max.	
<b>Nominal frequency</b>	$f_N$		—	374,00	—	MHz
<b>Minimum insertion attenuation</b> (including matching network)	$\alpha_{\min}$		—	8,5	10,0	dB
<b>Bandwidth</b>	$\alpha_{\text{rel}} \leq 3 \text{ dB}$	$B_{3\text{dB}}$	17	22	—	MHz
<b>Amplitude ripple (p-p)</b>	$f_N \pm 7 \text{ MHz}$	$\Delta\alpha$	—	0,5	1	dB
<b>Group delay ripple (p-p)</b>	$f_N \pm 7 \text{ MHz}$	$\Delta\tau$	—	40	100	ns
<b>Triple transit suppression</b>			30	40	—	dB
<b>Relative attenuation (relative to <math>\alpha_{\min}</math>)</b>		$\alpha_{\text{rel}}$				
	$f_N - 16,5 \text{ MHz} \dots f_N - 22 \text{ MHz}$		30	42	—	dB
	$f_N - 22 \text{ MHz} \dots f_N - 33 \text{ MHz}$		40	45	—	dB
	$f_N - 33 \text{ MHz} \dots f_N - 150 \text{ MHz}$		48	52	—	dB
	$f_N + 16,5 \text{ MHz} \dots f_N + 18 \text{ MHz}$		20	38	—	dB
	$f_N + 18 \text{ MHz} \dots f_N + 22 \text{ MHz}$		30	42	—	dB
	$f_N + 22 \text{ MHz} \dots f_N + 48 \text{ MHz}$		38	44	—	dB
	$f_N + 48 \text{ MHz} \dots f_N + 80 \text{ MHz}$		40	45	—	dB
	$f_N + 80 \text{ MHz} \dots f_N + 150 \text{ MHz}$		48	55	—	dB
<b>Adjacent channel suppression</b>						
average attenuation relative to $\alpha_{\min}$		$\alpha_{\text{rel}}$				
	$f_N - 16,5 \dots f_N - 33,5 \text{ MHz}$		40	64	—	dB
	$f_N + 16,5 \dots f_N + 33,5 \text{ MHz}$		40	56	—	dB
<b>Temperature coefficient of frequency</b>	$TC_f$		—	- 87	—	ppm/K



Data Sheet

Matching network (element values may depend on pcb layout)

50 Ω unbalanced:

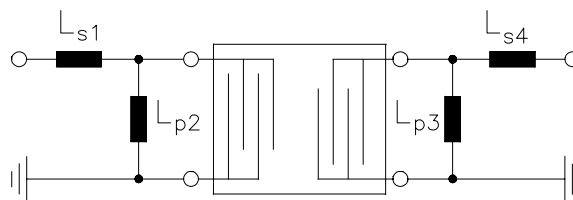


$$L_{s1} = 27 \text{ nH}$$

$$L_{p2} = 47 \text{ nH}$$

$$L_{p3} = 47 \text{ nH}$$

$$L_{s4} = 27 \text{ nH}$$

250 Ω balanced:

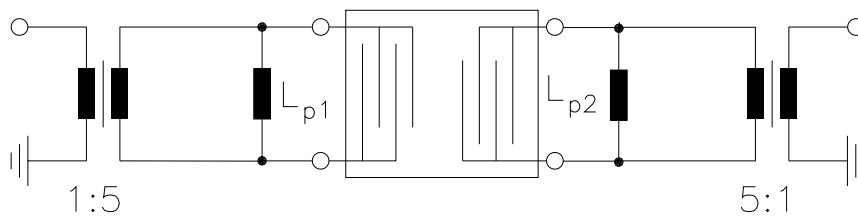

$$L_{p1} = 24 \text{ nH (e.g. Coilcraft 0603CS-24NX_BC)}$$

$$L_{p2} = 24 \text{ nH}$$



SAW Components


B3677

Low-Loss Filter

374,0 MHz

Data Sheet

200  $\Omega$  balanced:

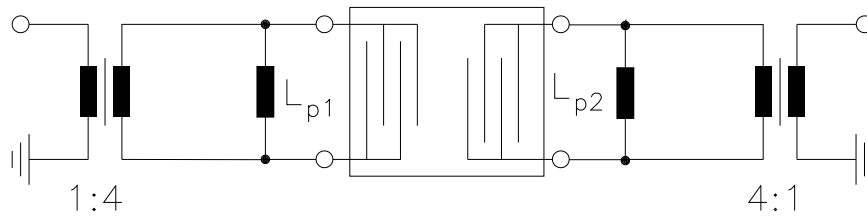


$$L_{p1} = 27 \text{ nH}$$

$$L_{p2} = 22 \text{ nH}$$




Data Sheet

Transfer function:

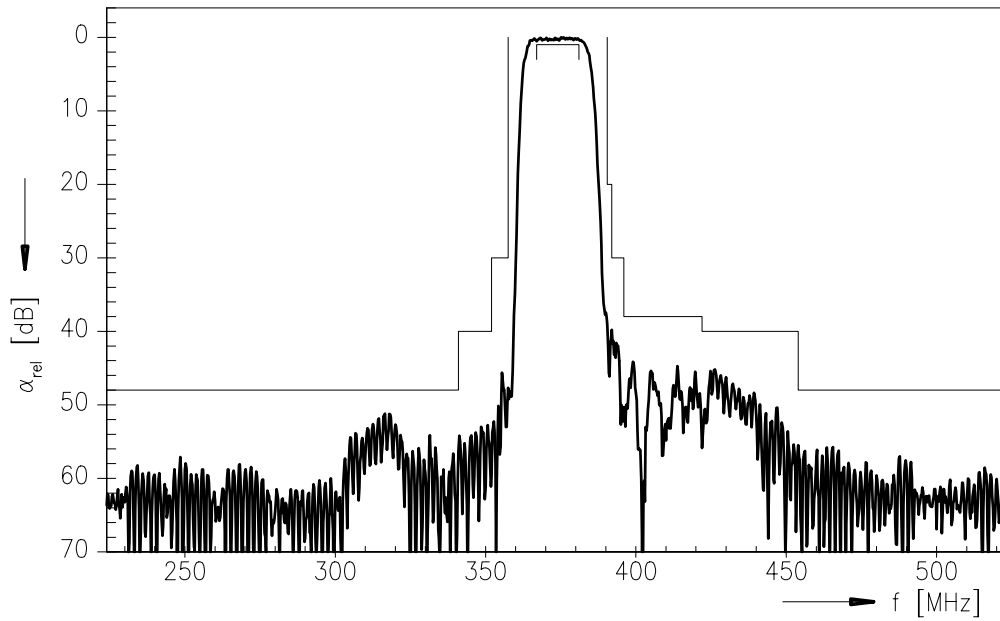

Transfer function (pass band):

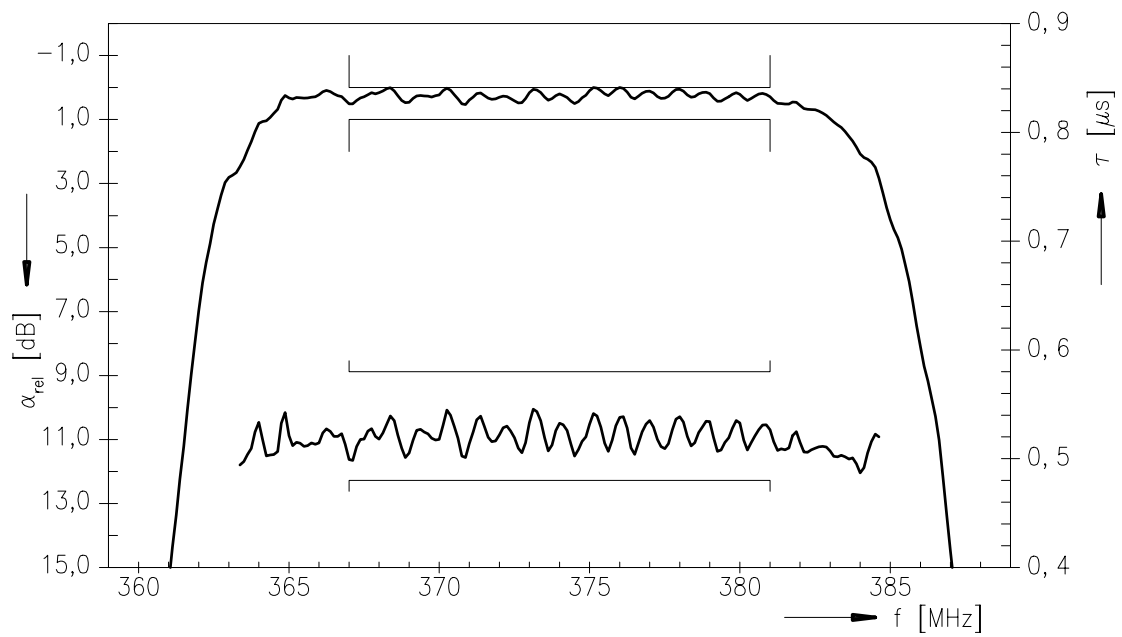



**SAW Components**

**B3677**

**Low-Loss Filter**

**374,0 MHz**

**Data Sheet**

**Published by EPCOS AG**  
**Surface Acoustic Wave Components Division, OFW E NK**  
**P.O. Box 80 17 09, D-81617 München**

© EPCOS AG 1999. All Rights Reserved.

As far as patents or other rights of third parties are concerned, liability is only assumed for components per se, not for applications, processes and circuits implemented within components or assemblies.

The information describes the type of component and shall not be considered as assured characteristics.

Terms of delivery and rights to change design reserved.

For questions on technology, prices and delivery please contact the sales offices of EPCOS AG or the international representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our sales offices.