



Siemens Matsushita Components

SAW Components Bandpass Filter

B8100
110,59 MHz

Data Sheet


duroplast package DIP18D

Features

- IF filter for cordless application
- Channel selection in DECT system
- Low group delay ripple
- Surface Mounted Technology (SMT)
- Standard IC small outline (SO) package
- Balanced and unbalanced operation possible

Terminals


- Tinned CuFe alloy

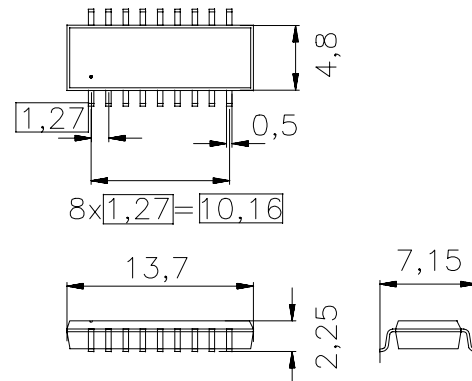

Dimensions in mm, approx. weight 0,4 g

Pin configuration

7	Input
8	Input ground or balanced input
16	Output
17	Output ground or balanced output
1,4,5,6,9,10	Chip carrier – ground
13,14,15,18	
2,3,11,12	not connected



Type	Ordering code	Marking and Package according to	Packing according to
B8100	B39111-B8100-L100	C61157-A2-A4	F61074-V8058-Z000

Electrostatic Sensitive Device (ESD)

Maximum ratings

Operable temperature range	T	- 25/+ 65	°C
Storage temperature range	T_{stg}	- 40/+ 85	°C
DC voltage	V_{DC}	5	V
Source power	P_s	10	dBm

Preliminary format of data sheet.
Terms of delivery and rights to change design reserved.
Page 1 of 5

OFW EM CP
Jun 30, 1997



Siemens Matsushita Components

SAW Components Bandpass Filter

B8100
110,59 MHz


Data Sheet

Characteristics

Operating temperature range:	$T = +25\text{ }^{\circ}\text{C}$
Terminating source impedance:	$Z_S = 50\ \Omega (600\ \Omega \parallel 240\ \text{nH}^*)$
Terminating load impedance:	$Z_L = 50\ \Omega (140\ \Omega \parallel 110\ \text{nH}^*)$

		min.	typ.	max.			
Nominal frequency	f_N	—	110,59	—	MHz		
Center frequency (center frequency between 10 dB points)	f_c	110,48	110,59	110,70	MHz		
Insertion attenuation at f_N (including losses in matching network)	α_N	—	20,9 (13,5*)	22,4 (15,0*)	dB		
Passband width	$B_{3\text{dB}}$	—	1,28	—	MHz		
	$B_{30\text{dB}}$	—	2,40	—	MHz		
Group delay ripple (p-p) $f_N - 600\ \text{kHz} \quad \dots \quad f_N + 600\ \text{kHz}$	$\Delta\tau$	—	180	250	ns		
		—	(300*)	(400*)	ns		
Relative attenuation (relative to α_N)	α_{rel}	$f_N - 576\ \text{kHz} \quad \dots \quad f_N + 576\ \text{kHz}$	—	2,0	4,0	dB	
		$f_N \pm 576\ \text{kHz} \quad \dots \quad f_N \pm 700\ \text{kHz}$	—	—	10,0	dB	
		$f_N \pm 1,6\ \text{MHz} \quad \dots \quad f_N \pm 3,1\ \text{MHz}$	32	38	—	dB	
		$f_N \pm 3,1\ \text{MHz} \quad \dots \quad f_N \pm 4,6\ \text{MHz}$	40	44	—	dB	
		$f_N \pm 4,6\ \text{MHz} \quad \dots \quad f_N \pm 20\ \text{MHz}$	45	50	—	dB	
		$f_N \pm 1,728\ \text{MHz}$	32	38	—	dB	
		$f_N \pm 2 \times 1,728\ \text{MHz}$	42	47	—	dB	
		$f_N \pm 3 \times 1,728\ \text{MHz}$	48	53	—	dB	
		Impedance at f_N	Input: $Z_{\text{IN}} = R_{\text{IN}} \parallel C_{\text{IN}}$ Output: $Z_{\text{OUT}} = R_{\text{OUT}} \parallel C_{\text{OUT}}$	—	600 \parallel 8,5	—	$\Omega \parallel \text{pF}$
				—	140 \parallel 19,0	—	$\Omega \parallel \text{pF}$
Temperature coefficient of frequency	TC_f	—	- 18	—	ppm/K		

*) with matching network to 50 Ω (element values depend on PCB layout):

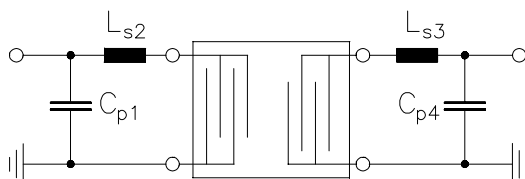

C_{p1}	=	0	pF
L_{s2}	=	220	nH
L_{s3}	=	120	nH
C_{p4}	=	22	pF

Preliminary format of data sheet.
Terms of delivery and rights to change design reserved.
Page 2 of 5

OFW EM CP
Jun 30, 1997




Siemens Matsushita Components

**SAW Components
Bandpass Filter**


**B8100
110,59 MHz**

Data Sheet

Transfer function:

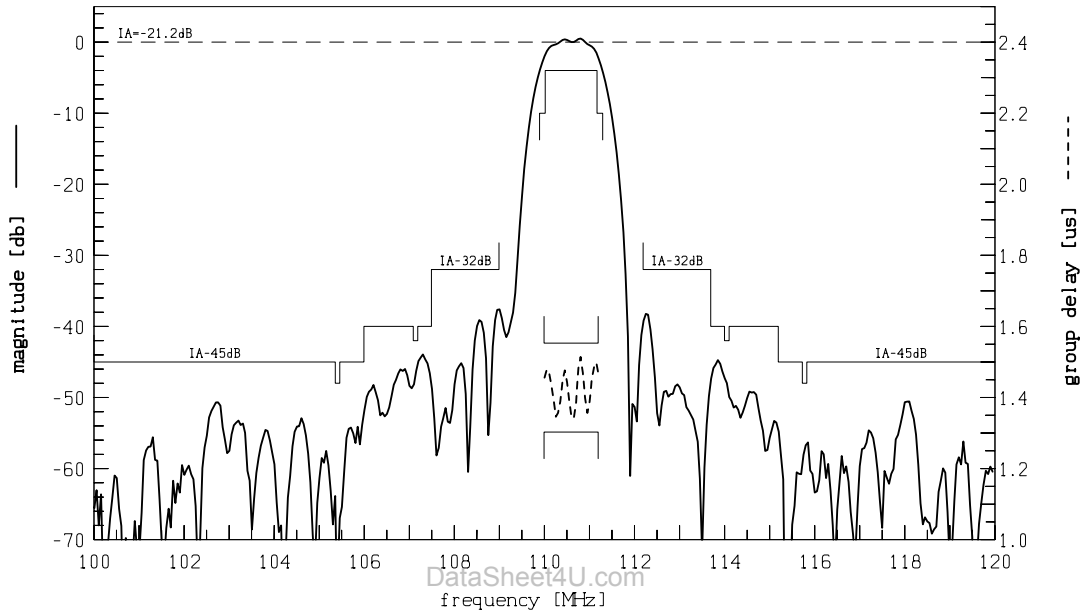

Transfer function (pass band):

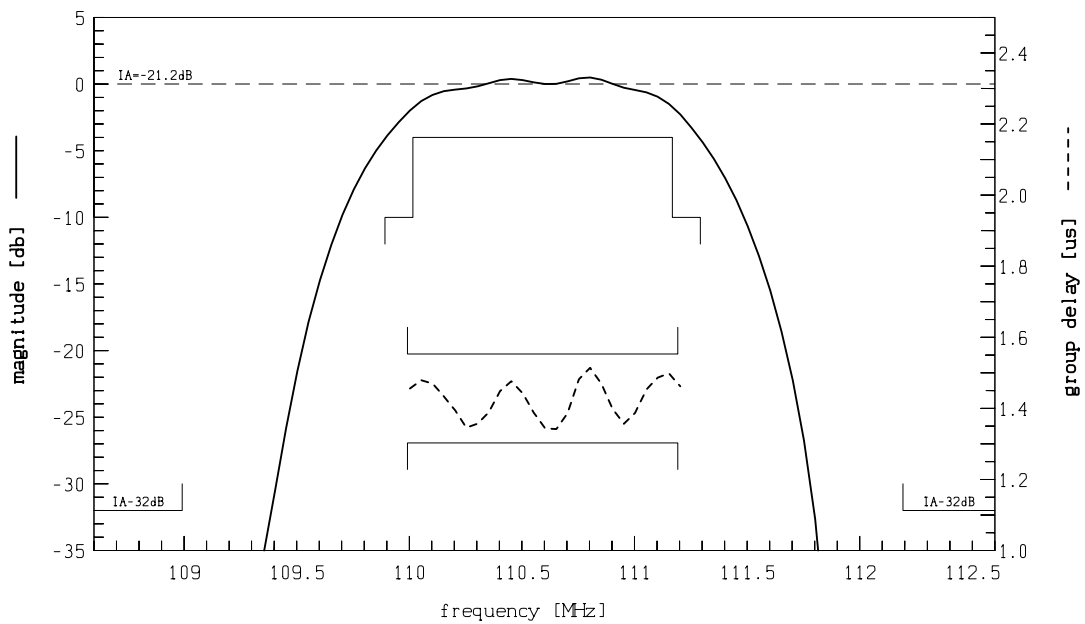

Preliminary format of data sheet.
Terms of delivery and rights to change design reserved.
Page 3 of 5

OFW EM CP
Jun 30, 1997



SAW Components
Bandpass Filter



B8100
110,59 MHz

Application Note



Recommended Pin Configurations:

For optimum performance use the following pin configurations.



Balanced-balanced operation:

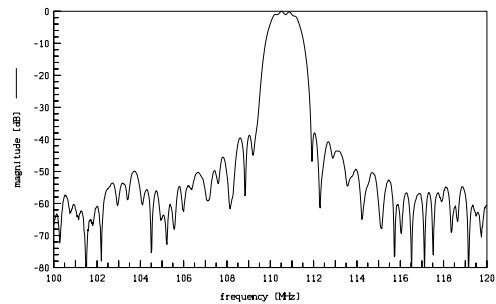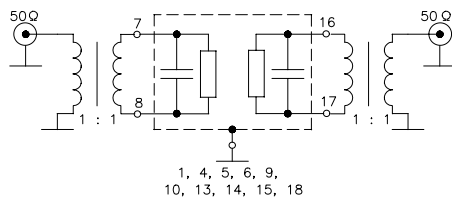

Balanced-unbalanced operation:

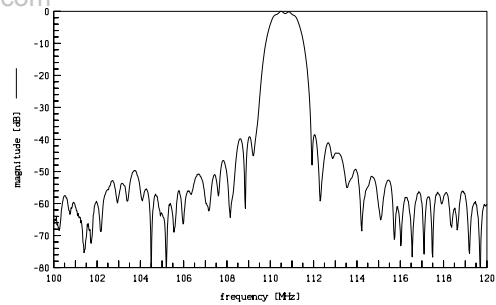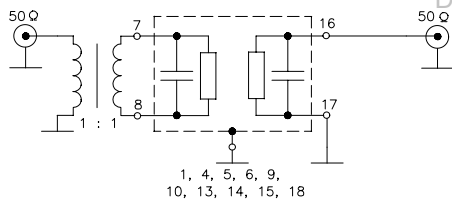

Unbalanced-unbalanced operation

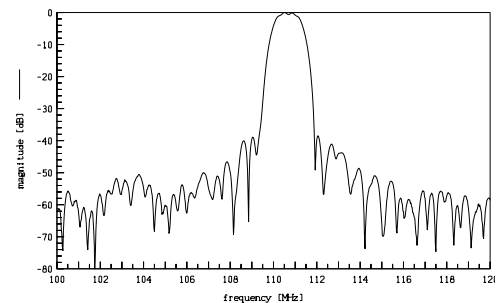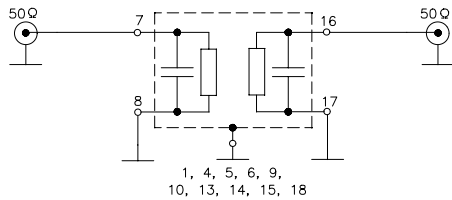

Preliminary format of data sheet.
Terms of delivery and rights to change design reserved.
Page 4 of 5

OFW EM CP
Jun 30, 1997



Siemens Matsushita Components


**SAW Components
Bandpass Filter**

**B8100
110,59 MHz**


Application Note

Matching Stability / Variation of the Matching Network:

All matching-elements changed by $\pm 10\%$ (simulation).

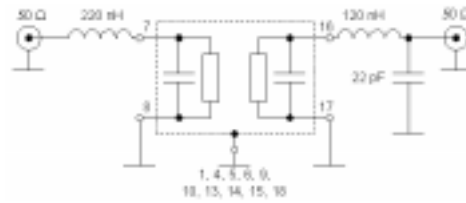


Transfer function of matched filter (S_{21}):

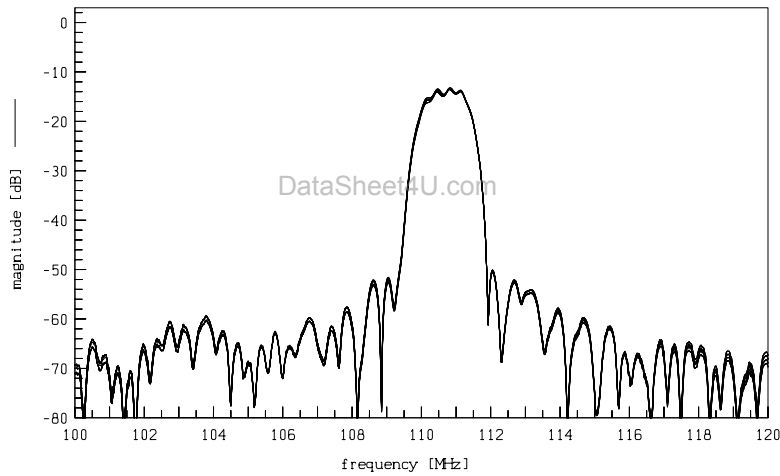


Impedance variation of matched filter (in passband):

S_{11} :

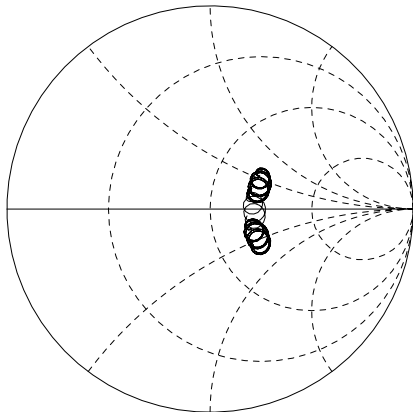

S_{22} :

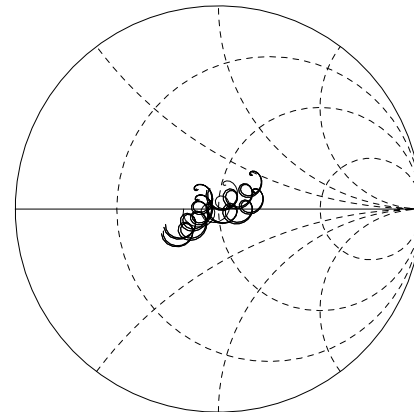

Preliminary format of data sheet.
Terms of delivery and rights to change design reserved.
Page 5 of 5

OFW EM CP
Jun 30, 1997