



# SAW Components

Data Sheet B4233





**SAW Components**

**B4233**

**Low-Loss Dual Band Filter for Mobile Communication**

**390,0 / 420,0 MHz**

**Data Sheet**




Ceramic package **QCC8C**

**Features**

- Low-loss filter for TETRA
- Usable passband: 20 MHz
- Ceramic package for **Surface Mounted Technology (SMT)**
- RoHS compliant

**Terminals**


- Ni, gold-plated

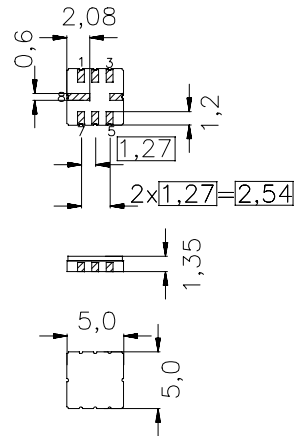

Dimensions in mm, approx. weight 0,10 g

**Pin configuration**

- 1 Input [Filter 1]
- 3 Input [Filter 2]
- 5 Output [Filter 2]
- 7 Output [Filter 1]
- 2, 6 To be grounded
- 4, 8 Case ground



Type	Ordering code	Marking and Package according to	Packing according to
B4233	B39421-B4233-U310	C61157-A7-A56	F61074-V8070-Z000

**Electrostatic Sensitive Device (ESD)**

**Maximum ratings**

Operable temperature range	$T$	- 30 / + 85	°C	Machine Model, 10 pulses
Storage temperature range	$T_{stg}$	- 40 / + 85	°C	
DC voltage	$V_{DC}$	3	V	
ESD voltage	$V_{ESD}^*$	100*	V	
Source power (CW)	$P_S$	12	dBm	

\*-acc. to JESD22-A115A (Machine Model), 10 negative & 10 positive pulses



**Characteristics Filter 1**

Operating temperature range:  $T = +25^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 50\ \Omega$

			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	390,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	380,0 ... 400,0 MHz	—	1,9	2,2	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	380,0 ... 400,0 MHz	—	0,7	1,1	dB
<b>Input return loss</b>		380,0 ... 400,0 MHz	10,0	11,0	—	dB
<b>Output return loss</b>		380,0 ... 400,0 MHz	10,0	12,0	—	dB
<b>Attenuation</b>	$\alpha_{\text{abs}}$	0,1 ... 150,0 MHz	35,0	42,0	—	dB
		190,0 ... 200,0 MHz	30,0	41,0	—	dB
		228,0 ... 250,0 MHz	30,0	41,0	—	dB
		252,0 ... 275,0 MHz	30,0	39,0	—	dB
		275,0 ... 287,0 MHz	33,0	37,0	—	dB
		304,0 ... 320,0 MHz	30,0	34,0	—	dB
		320,0 ... 335,0 MHz	30,0	33,0	—	dB
		342,0 ... 360,0 MHz	20,0	25,0	—	dB
		418,0 ... 440,0 MHz	20,0	22,0	—	dB
		442,0 ... 455,0 MHz	25,0	31,0	—	dB
		456,0 ... 480,0 MHz	30,0	39,0	—	dB
		492,0 ... 531,0 MHz	30,0	42,0	—	dB
		532,0 ... 560,0 MHz	33,0	39,0	—	dB
		570,0 ... 600,0 MHz	25,0	35,0	—	dB
		632,0 ... 668,0 MHz	35,0	46,0	—	dB
		684,0 ... 1000,0 MHz	27,0	34,0	—	dB



**Characteristics Filter 1**

Operating temperature range:  $T = -30$  to  $+60^{\circ}\text{C}$

Terminating source impedance:  $Z_S = 50\ \Omega$

Terminating load impedance:  $Z_L = 50\ \Omega$

			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	390,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	380,0 ... 400,0 MHz	—	2,6	3,3	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	380,0 ... 400,0 MHz	—	1,4	2,3	dB
<b>Input return loss</b>		380,0 ... 400,0 MHz	10,0	11,0	—	dB
<b>Output return loss</b>		380,0 ... 400,0 MHz	10,0	12,0	—	dB
<b>Attenuation</b>	$\alpha_{\text{abs}}$					
		0,1 ... 150,0 MHz	35,0	42,0	—	dB
		190,0 ... 200,0 MHz	30,0	41,0	—	dB
		228,0 ... 250,0 MHz	30,0	41,0	—	dB
		252,0 ... 275,0 MHz	30,0	39,0	—	dB
		275,0 ... 287,0 MHz	33,0	37,0	—	dB
		304,0 ... 320,0 MHz	30,0	33,0	—	dB
		320,0 ... 335,0 MHz	30,0	33,0	—	dB
		342,0 ... 360,0 MHz	20,0	25,0	—	dB
		418,0 ... 440,0 MHz	20,0	21,0	—	dB
		442,0 ... 455,0 MHz	25,0	31,0	—	dB
		456,0 ... 480,0 MHz	30,0	39,0	—	dB
		492,0 ... 531,0 MHz	30,0	42,0	—	dB
		532,0 ... 560,0 MHz	33,0	39,0	—	dB
		570,0 ... 600,0 MHz	25,0	35,0	—	dB
		632,0 ... 668,0 MHz	35,0	46,0	—	dB
		684,0 ... 1000,0 MHz	27,0	34,0	—	dB




**Characteristics Filter 1**

Operating temperature range:  $T = -30$  to  $+85^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 50\ \Omega$


			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	390,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	380,0 ... 400,0 MHz	—	2,7	3,3	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	380,0 ... 400,0 MHz	—	1,5	2,3	dB
<b>Input return loss</b>		380,0 ... 400,0 MHz	10,0	11,0	—	dB
<b>Output return loss</b>		380,0 ... 400,0 MHz	10,0	12,0	—	dB
<b>Attenuation</b>	$\alpha_{\text{abs}}$					
		0,1 ... 150,0 MHz	35,0	42,0	—	dB
		190,0 ... 200,0 MHz	30,0	41,0	—	dB
		228,0 ... 250,0 MHz	30,0	41,0	—	dB
		252,0 ... 275,0 MHz	30,0	39,0	—	dB
		275,0 ... 287,0 MHz	33,0	37,0	—	dB
		304,0 ... 320,0 MHz	30,0	33,0	—	dB
		320,0 ... 335,0 MHz	30,0	33,0	—	dB
		342,0 ... 360,0 MHz	20,0	25,0	—	dB
		418,0 ... 440,0 MHz	20,0	21,0	—	dB
		442,0 ... 455,0 MHz	25,0	31,0	—	dB
		456,0 ... 480,0 MHz	30,0	39,0	—	dB
		492,0 ... 531,0 MHz	30,0	42,0	—	dB
		532,0 ... 560,0 MHz	33,0	39,0	—	dB
		570,0 ... 600,0 MHz	25,0	35,0	—	dB
		632,0 ... 668,0 MHz	35,0	46,0	—	dB
		684,0 ... 1000,0 MHz	27,0	34,0	—	dB



Transfer function of filter 1 (passband)

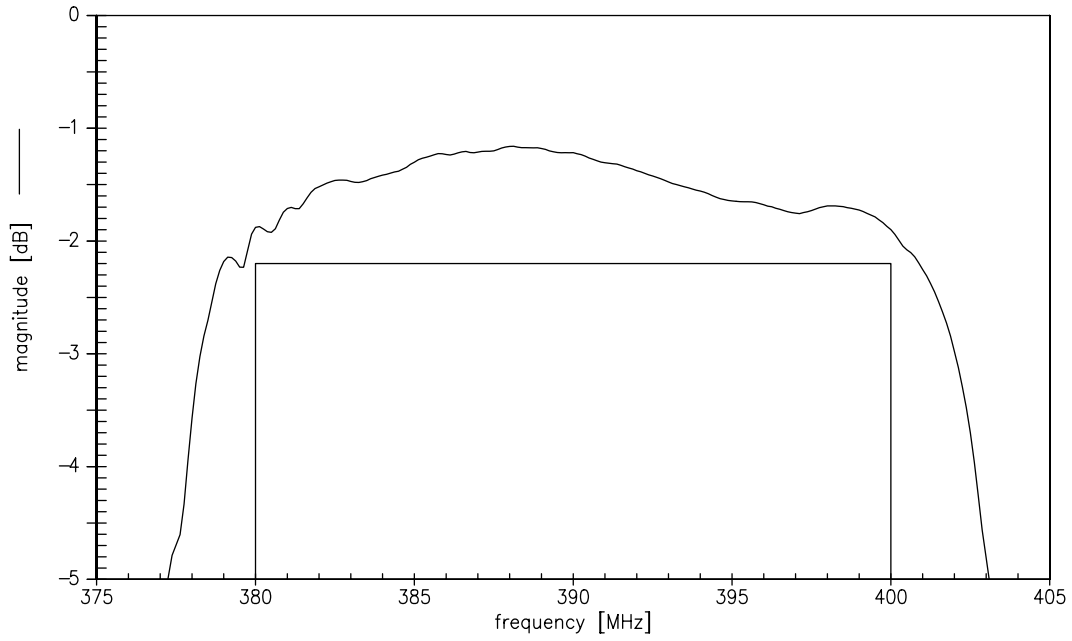

Transfer function of filter 1 (narrow band)

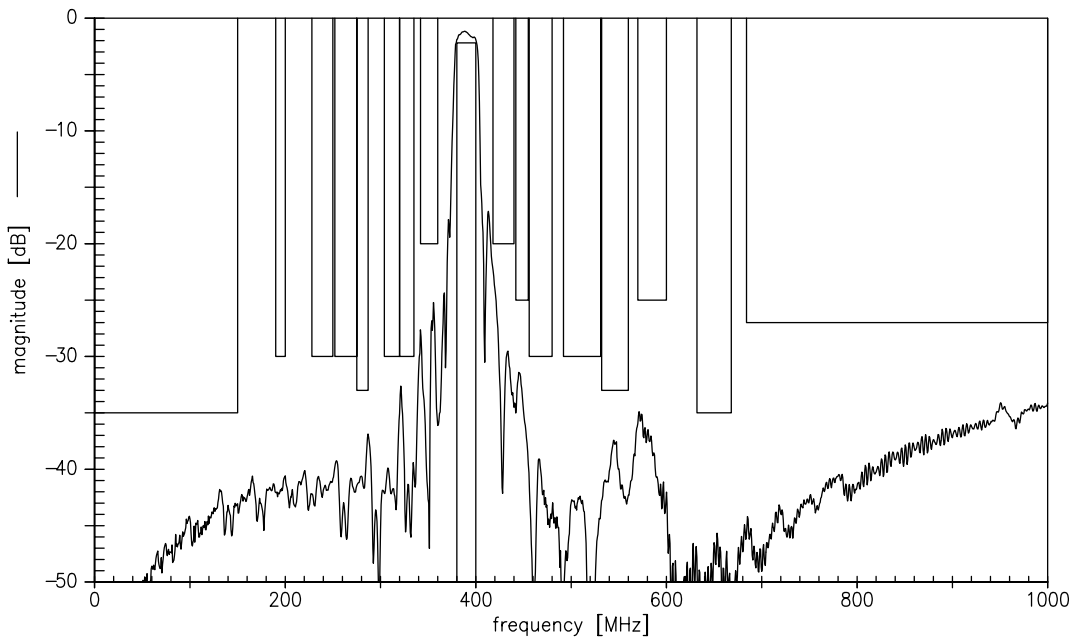



**Characteristics Filter 2**

Operating temperature range:  $T = +25^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 50\ \Omega$

			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	420,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	410,0 ... 430,0 MHz	—	1,9	2,2	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	410,0 ... 430,0 MHz	—	0,6	1,0	dB
<b>Input return loss</b>		410,0 ... 430,0 MHz	10,0	11,5	—	dB
<b>Output return loss</b>		410,0 ... 430,0 MHz	10,0	13,5	—	dB
<b>Attenuation</b>	$\alpha_{\text{abs}}$	0,1 ... 150,0 MHz	35,0	42,0	—	dB
		204,0 ... 216,0 MHz	30,0	41,0	—	dB
		246,0 ... 270,0 MHz	30,0	41,0	—	dB
		272,0 ... 301,0 MHz	35,0	41,0	—	dB
		328,0 ... 344,0 MHz	30,0	42,0	—	dB
		345,0 ... 360,0 MHz	25,0	31,0	—	dB
		369,0 ... 387,0 MHz	18,0	23,0	—	dB
		451,0 ... 473,0 MHz	20,0	23,0	—	dB
		477,0 ... 491,0 MHz	25,0	35,0	—	dB
		492,0 ... 516,0 MHz	30,0	39,0	—	dB
		532,0 ... 573,0 MHz	30,0	38,0	—	dB
		574,0 ... 602,0 MHz	33,0	39,0	—	dB
		602,0 ... 1000,0 MHz	27,0	34,0	—	dB



Data Sheet



Characteristics Filter 2

Operating temperature range:  $T = -30$  to  $+60^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 50\ \Omega$

			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	420,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	410,0 ... 430,0 MHz	—	2,4	3,3	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	410,0 ... 430,0 MHz	—	1,1	2,2	dB
<b>Input return loss</b>		410,0 ... 430,0 MHz	10,0	11,5	—	dB
<b>Output return loss</b>		410,0 ... 430,0 MHz	10,0	13,5	—	dB
<b>Attenuation</b>	$\alpha_{\text{abs}}$					
		0,1 ... 150,0 MHz	35,0	42,0	—	dB
		204,0 ... 216,0 MHz	30,0	41,0	—	dB
		246,0 ... 270,0 MHz	30,0	41,0	—	dB
		272,0 ... 301,0 MHz	35,0	41,0	—	dB
		328,0 ... 344,0 MHz	30,0	35,0	—	dB
		345,0 ... 360,0 MHz	25,0	31,0	—	dB
		369,0 ... 387,0 MHz	18,0	23,0	—	dB
		451,0 ... 473,0 MHz	20,0	21,0	—	dB
		477,0 ... 491,0 MHz	25,0	35,0	—	dB
		492,0 ... 516,0 MHz	30,0	39,0	—	dB
		532,0 ... 573,0 MHz	30,0	38,0	—	dB
		574,0 ... 602,0 MHz	33,0	39,0	—	dB
		602,0 ... 1000,0 MHz	27,0	34,0	—	dB





Data Sheet




Characteristics Filter 2

Operating temperature range:  $T = -30$  to  $+85^{\circ}\text{C}$   
 Terminating source impedance:  $Z_S = 50\ \Omega$   
 Terminating load impedance:  $Z_L = 50\ \Omega$


			min.	typ.	max.	
<b>Center frequency</b>	$f_c$		—	420,0	—	MHz
<b>Maximum insertion attenuation</b>	$\alpha_{\max}$	410,0 ... 430,0 MHz	—	2,5	3,3	dB
<b>Amplitude ripple (p-p)</b>	$\Delta\alpha$	410,0 ... 430,0 MHz	—	1,2	2,2	dB
<b>Input return loss</b>		410,0 ... 430,0 MHz	10,0	11,5	—	dB
<b>Output return loss</b>		410,0 ... 430,0 MHz	10,0	13,5	—	dB
<b>Attenuation</b>	$\alpha_{\text{abs}}$					
		0,1 ... 150,0 MHz	35,0	42,0	—	dB
		204,0 ... 216,0 MHz	30,0	41,0	—	dB
		246,0 ... 270,0 MHz	30,0	41,0	—	dB
		272,0 ... 301,0 MHz	35,0	41,0	—	dB
		328,0 ... 344,0 MHz	30,0	35,0	—	dB
		345,0 ... 360,0 MHz	25,0	31,0	—	dB
		369,0 ... 387,0 MHz	18,0	23,0	—	dB
		451,0 ... 473,0 MHz	20,0	21,0	—	dB
		477,0 ... 491,0 MHz	25,0	35,0	—	dB
		492,0 ... 516,0 MHz	30,0	39,0	—	dB
		532,0 ... 573,0 MHz	30,0	38,0	—	dB
		574,0 ... 602,0 MHz	33,0	39,0	—	dB
		602,0 ... 1000,0 MHz	27,0	34,0	—	dB



Transfer function of filter 2 (passband)

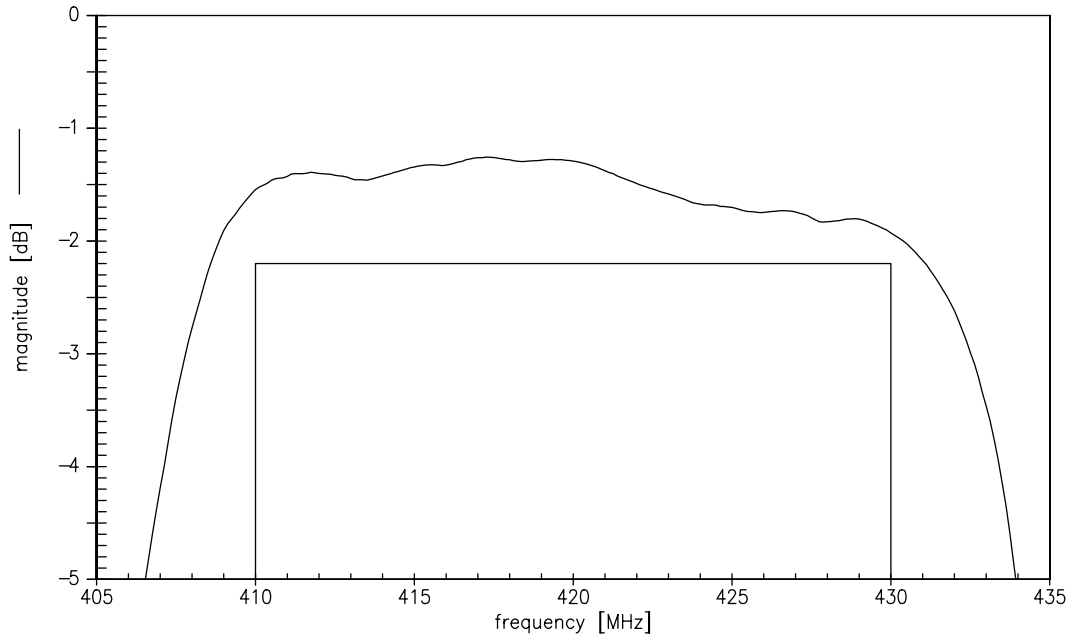

Transfer function of filter 2 (narrow band)

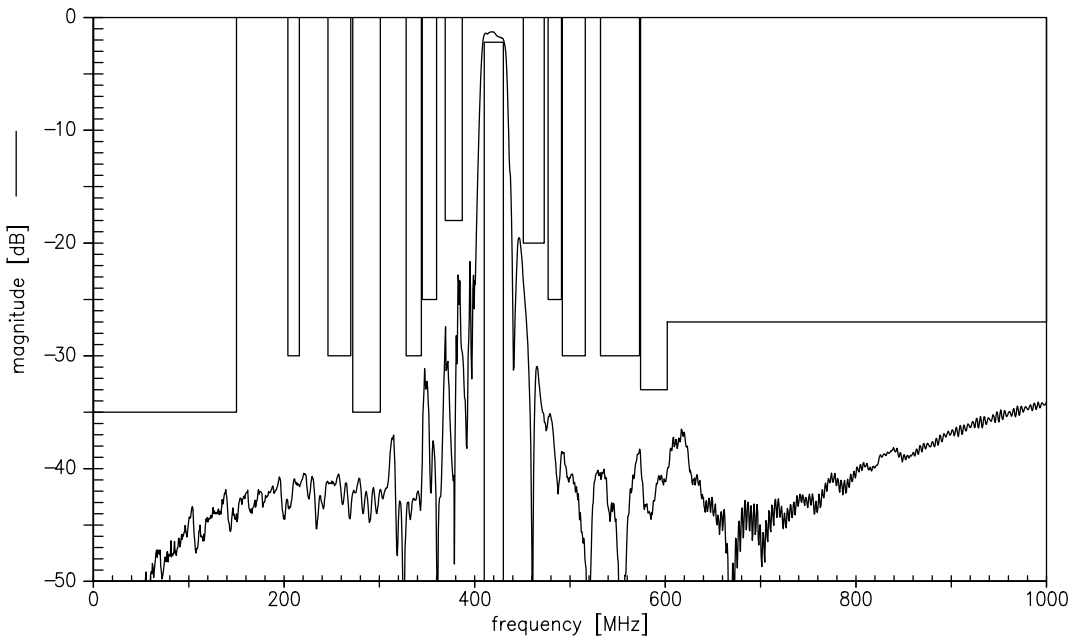



**SAW Components**

**B4233**

**Low-Loss Dual Band Filter for Mobile Communication**

**390,0 / 420,0 MHz**

Data Sheet



**Published by EPCOS AG**

**Surface Acoustic Wave Components Division, SAW COM WT PD**

**P.O. Box 80 17 09, 81617 Munich, GERMANY**

© EPCOS AG 2006. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.