

# RF Filters for Cordless Phones

Series/Type: B4629

The following products presented in this data sheet are being withdrawn.

Ordering Code	Substitute Product	Date of Withdrawal	Deadline Last Orders	Last Shipments	
B39931B4629Z610		2004-05-19	2004-09-30	2004-12-31	

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of our worldwide sales network are presented at www.epcos.com/sales.



# Withdrawn Products

The following products presented in this data sheet are being withdrawn:

# B39931B4629Z610

Date of withdrawal: 19–MAY–04
Deadline for last orders: 30–SEP–04
Last shipments: 31–DEC–04

For further information please contact your nearest EPCOS sales office, which will also support you in selecting a suitable substitute. The addresses of the sales offices are given on the Internet at www.epcos.com/sales.



# **SAW** Components

Data Sheet B4629





SAW Components B4629

#### **Low-Loss Filter for Mobile Communication**

931,00 MHz

**Data Sheet** 




#### **Features**

- Low loss RF filter for Cordless telephone CT1+
- High image frequency suppression
- No matching network required for operation at 50 Ω
- Ceramic package for Surface Mounted Technology (SMT)

#### **Terminals**

■ Ni, gold-plated

# Ceramic package DCC6






Dimensions in mm, approx. weight 0,07 g

#### Pin configuration

2	Input
3	Input - ground
5	Output
4	Output - ground
1,6	To be grounded



Туре	Ordering code		Packing according to		
B4629	B39931-B4629-Z610	C61157-A7-A41	F61074-V8030-Z000		

Electrostatic Sensitive Device (ESD)

#### **Maximum ratings**

Operable temperature range	T	0/+ 55	°C	
Storage temperature range	$T_{\rm stg}$	- 40/+ 85	°C	
DC voltage	$V_{\rm DC}$	0	V	
Input power	$P_{IN}$	10	dBm	Source impedance 50Ω



SAW Components B4629

## **Low-Loss Filter for Mobile Communication**

931,00 MHz

**Data Sheet** 



#### Characteristics

Operating temperature range:  $T=0 \text{ to } +55 \text{ }^{\circ}\text{C}$  Terminating source impedance:  $Z_{\text{S}}=50 \text{ }\Omega$  Terminating load impedance:  $Z_{\text{L}}=50 \text{ }\Omega$ 

		min.	typ.	max.	
Center frequency	f <sub>c</sub>	_	931,00	_	MHz
Maximum insertion attenuation 930,00 932,00 MHz	$\alpha_{\text{max}}$	_	3,4	4,0	dB
<b>Amplitude ripple</b> (p-p) 930,00 932,00 MHz	Δα	_	0,6	1,2	dB
Relative attenuation (relative to $\alpha_{max}$ ) 885,00 909,00 MHz 951,00 967,00 MHz 967,00 975,00 MHz	$lpha_{rel}$	35,0 10,0 35,0	41,0 24,0 48,0	_ _ _ _	dB dB dB
Temperature coefficient of frequency	$TC_{f}$	_	-30	_	ppm/K



SAW Components B4629


## **Low-Loss Filter for Mobile Communication**

931,00 MHz


**Data Sheet** 



#### Transfer function:

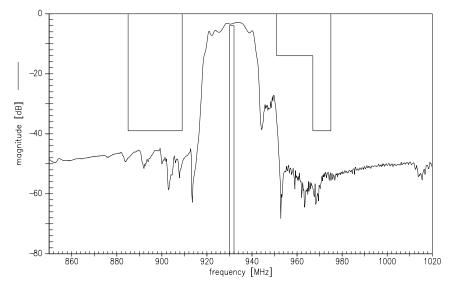

## Transfer function (wideband):

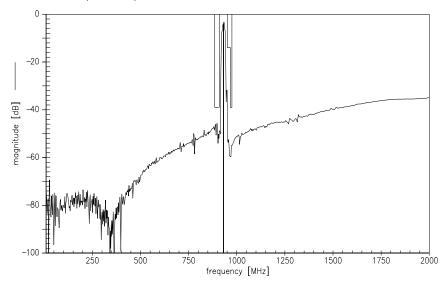



SAW Components B4629

**Low-Loss Filter for Mobile Communication** 

931,00 MHz

**Data Sheet** 



#### Published by EPCOS AG Surface Acoustic Wave Components Division, SAW MC WT P.O. Box 80 17 09, 81617 Munich, GERMANY

© EPCOS AG 2002. Reproduction, publication and dissemination of this brochure and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.

This brochure replaces the previous edition.

For questions on technology, prices and delivery please contact the Sales Offices of EPCOS AG or the international Representatives.

Due to technical requirements components may contain dangerous substances. For information on the type in question please also contact one of our Sales Offices.