

75Ω BNC PCB Mount Receptacles

75Ω BNC PCB Mount Receptacles (Screw Type)

Upgraded model BCJ-BPLHA offers superior electrical characteristics at high frequencies.



BCJ-BP Series

Model	Description	Stud Position	Panel Mount	Standard Package
BCJ-BPLH	Right Angle	Horizontal	Front: M2.6 screw	20 pcs / 100pcs
BCJ-BPLHA	Right Angle, Upgraded Model			20 pcs / 100pcs
BCJ-BPLH2P	Right Angle, Dual Jack			10 pcs
BCJ-BPLH3P	Right Angle, Triple Jack			10 pcs
BCJ-BPC2P	Straight, Dual Jack	—		10pcs / 100pcs


* Screws are not included.

Key Features and Benefits


- True 75Ω PC board mount receptacle.
- VSWR 1.1 or less up to 1GHz, 1.2 or less up to 3GHz for BCJ-BPLHA. (VSWR 1.1 or less up to 1GHz, 1.2 or less up to 2.5GHz for others.)
- Gold plated beryllium copper center contact.
- Can be fixed on the PC board with M2.6 screw for efficient soldering. (excluding BCJ-BPC2P)
- Space-saving design allows high-density mounting.
- Eliminates wiring material and cost.

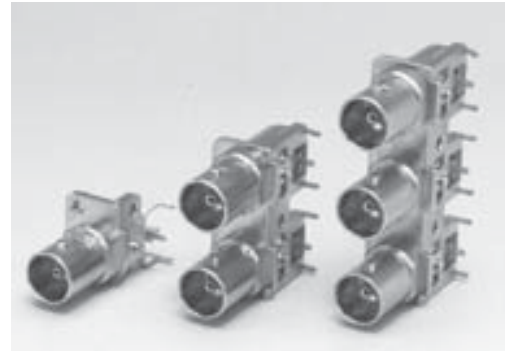


BCJ-BPLHA BCJ-BPLH2P BCJ-BPLH3P




BCJ-BPLHA




BCJ-BPLHA




BCJ-BPLHA




BCJ-BPLH2P




BCJ-BPC2P




BCJ-BPLH3P

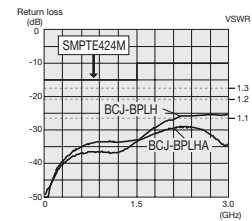

Return loss for BCJ-BPLHA, BCJ-BPLH



Return loss for BCJ-BPLH2P, BCJ-BPLH3P



Return loss for BCJ-BPC2P

	BCJ-BPLH BCJ-BPLHA	BCJ-BPLH2P	BCJ-BPLH3P	BCJ-BPC2P
Panel Hole Dim.	 Screw: M2.6 t1.6	 Screw: M2.6 t1.6	 Screw: M2.6 t1.6	 Screw: M2.6 t1.2
PCB Hole Dim.	 t2.0: BCJ-BPLHA t1.6: BCJ-BPLH (BOTTOM VIEW)	 t1.6 (BOTTOM VIEW)	 t1.6 (BOTTOM VIEW)	 t1.6 (BOTTOM VIEW)