

RoHS Compliant Product  
A suffix of "-C" specifies halogen & lead-free

## DESCRIPTION

BCX53 is designed for medium power amplifier applications.

## FEATURES


- Low voltage
- High current

## MARKING


AL

## PACKAGE INFORMATION

Package	MPQ	Leader Size
SOT-89	1K	7 inch



## SOT-89

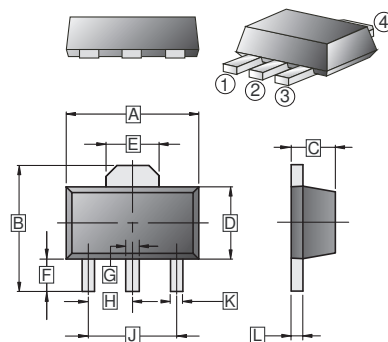

REF.	Millimeter		REF.	Millimeter	
	Min.	Max.		Min.	Max.
A	4.40	4.60	G	0.40	0.58
B	3.94	4.25	H	1.50 TYP	
C	1.40	1.60	J	3.00 TYP	
D	2.25	2.60	K	0.32	0.52
E	1.55 TYP.		L	0.35	0.44
F	0.89	1.20			

## ABSOLUTE MAXIMUM RATINGS (T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Rating	Unit
Collector-Base Voltage	V <sub>CBO</sub>	-100	V
Collector-Emitter Voltage	V <sub>CEO</sub>	-80	V
Emitter-Base Voltage	V <sub>EBO</sub>	-5	V
Collector Current	I <sub>C</sub>	-1	A
Collector Power Dissipation	P <sub>C</sub>	500	mW
Thermal Resistance from Junction to Ambient	R <sub>θJA</sub>	250	°C/W
Junction and Storage Temperature	T <sub>J</sub> , T <sub>STG</sub>	150, -55~150	°C

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Collector-Base Breakdown Voltage	V <sub>(BR)CBO</sub>	-100	-	-	V	I <sub>C</sub> = -100μA, I <sub>E</sub> = 0
Collector-Emitter Breakdown Voltage <sup>1</sup>	V <sub>(BR)CEO</sub>	-80	-	-	V	I <sub>C</sub> = -10mA, I <sub>B</sub> = 0
Emitter-Base Breakdown Voltage	V <sub>(BR)EBO</sub>	-5	-	-	V	I <sub>E</sub> = -100μA, I <sub>C</sub> = 0
Collector Cut-Off Current	I <sub>CBO</sub>	-	-	-0.1	μA	V <sub>CB</sub> = -30V, I <sub>E</sub> = 0
Emitter Cut-Off Current	I <sub>EBO</sub>	-	-	-0.1	μA	V <sub>EB</sub> = -5V, I <sub>C</sub> = 0
Collector-Emitter Saturation Voltage <sup>1</sup>	V <sub>CE(sat)</sub>	-	-	-0.5	V	I <sub>C</sub> = -0.5A, I <sub>B</sub> = -50mA
Base-Emitter Voltage <sup>1</sup>	V <sub>BE(on)</sub>	-	-	-1	V	V <sub>CE</sub> = -2V, I <sub>C</sub> = -500mA
DC Current Gain <sup>1</sup>	h <sub>FE</sub>	63	-	-		V <sub>CE</sub> = -2V, I <sub>C</sub> = -5mA
		100	-	250		V <sub>CE</sub> = -2V, I <sub>C</sub> = -150mA
		40	-	-		V <sub>CE</sub> = -2V, I <sub>C</sub> = -0.5A
Transition Frequency	f <sub>T</sub>	-	50	-	MHZ	V <sub>CE</sub> = -5V, I <sub>C</sub> = -10mA, f = 100MHZ

Notes:

1. Pulse test.

**CHARACTERISTIC CURVES**

**Static Characteristic**

