

isc Silicon PNP Power Transistor
2SA1546
DESCRIPTION



• The 2SA1546 is designed for uses of high-resolution monitor TV applications. This makes it possible to raise the video band Of high-resolution monitor TVs to 50MHz.

FEATURES

- Collector–Emitter Sustaining Voltage– : $V_{CBO} = -250$ V(Min)
- Complement to Type 2SC4001
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

ABSOLUTE MAXIMUM RATINGS($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	VALUE	UNIT
V_{CBO}	Collector-Base Voltage	-250	V
V_{CEO}	Collector-Emitter Voltage	-250	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_c	Collector Current-Continuous	-0.1	A
P_C	Collector Power Dissipation $T_C=25^\circ\text{C}$	-7	W
T_j	Junction Temperature	150	$^\circ\text{C}$
T_{stg}	Storage Temperature Range	-55~150	$^\circ\text{C}$

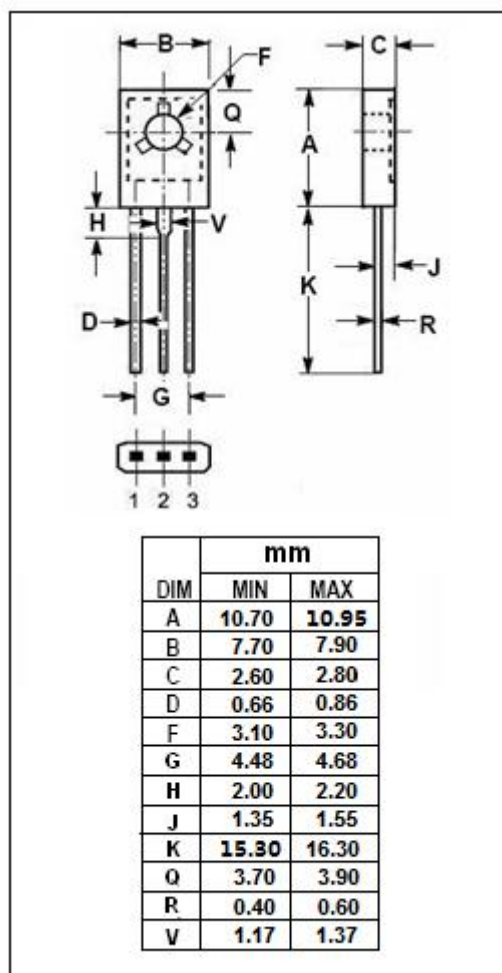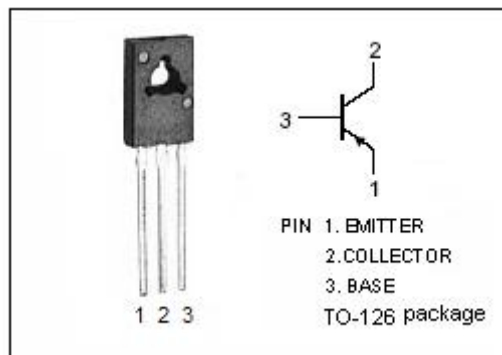

isc Silicon PNP Power Transistor

2SA1546

ELECTRICAL CHARACTERISTICS

 $T_c = 25^\circ\text{C}$ unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	MAX	UNIT
I_{CBO}	Collector Cutoff Current	$V_{CB} = -200\text{V}; I_E = 0$		-100	nA
I_{EBO}	Emitter Cutoff Current	$V_{EB} = -3\text{V}; I_C = 0$		-100	nA
h_{FE}	DC Current Gain	$I_C = -10\text{mA}; V_{CE} = -10\text{V}$	60		300
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C = -10\text{mA}; I_B = -1\text{mA}$		-0.3	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C = -10\text{mA}; I_B = -1\text{mA}$		-1.2	V

◆ h_{FE} Classifications

M	L	K
60-120	100-200	160-300

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.