

isc Silicon NPN RF Transistor
BFQ591
DESCRIPTION


- High Power Gain
- High Current Gain Bandwidth Product
- Low Noise Figure
- Minimum Lot-to-Lot variations for robust device performance and reliable operation

APPLICATIONS

- Designed for use in MATV or CATV amplifiers and RF communications subscribers equipment.

ABSOLUTE MAXIMUM RATINGS(T_a=25°C)

SYMBOL	PARAMETER	VALUE	UNIT
V _{CBO}	Collector-Base Voltage	20	V
V _{CEO}	Collector-Emitter Voltage	15	V
V _{EBO}	Emitter-Base Voltage	3	V
I _C	Collector Current-Continuous	200	mA
P _C	Collector Power Dissipation @T _c =25°C	2.25	W
T _J	Junction Temperature	175	°C
T _{stg}	Storage Temperature Range	-65~150	°C

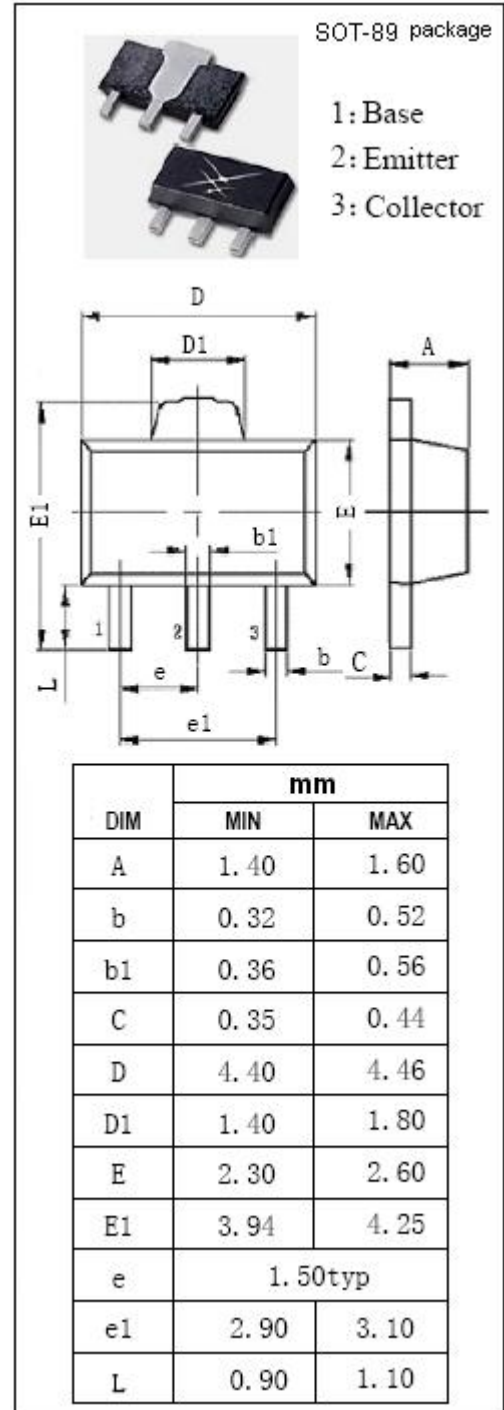

ELECTRICAL CHARACTERISTICS

 T_c=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
V _{(BR)CES}	Collector-Emitter Breakdown Voltage	I _C = 0.1mA ; I _B = 0	15			V
V _{(BR)CBO}	Collector-Base Breakdown Voltage	I _C = 0.1m A ; I _E = 0	20			V
V _{(BR)EBO}	Emitter-Base Breakdown Voltage	I _E = 0.1m A ; I _C = 0	3			V
I _{CBO}	Collector Cutoff Current	V _{CB} = 10V ; I _E = 0			0.1	μ A
h _{FE}	DC Current Gain	I _C = 70mA ; V _{CE} = 8V	60		250	
f _T	Current-Gain—Bandwidth Product	I _C = 70mA ; V _{CE} = 12V ; f= 1GHz		7		GHz
PG	Power Gain	I _C = 70mA ; V _{CE} = 12V ; f= 900MHz		11		dB
PG	Power Gain	I _C = 70mA ; V _{CE} = 12V ; f= 2GHz		5.5		dB
C _{re}	Feedback Capacitance	I _E = 0 ; V _{CB} = 12V ; f= 1MHz		0.8		pF
S _{21e} ²	Insertion Power Gain	I _C = 70mA ; V _{CE} = 12V ; f= 1GHz		10		dB
V _O	Output Voltage	note		700		mV

Note: d_{im} = 60 dB (DIN45004B); V_p = V_o; V_q = V_o -6 dB; f_p = 795.25 MHz; f_q = 803.25 MHz; f_r = 803.25 MHz; measured @ f_(p+q+r) = 793.25 MHz.

NOTICE:

ISC reserves the rights to make changes of the content herein the datasheet at any time without notification. The information contained herein is presented only as a guide for the applications of our products.

ISC products are intended for usage in general electronic equipment. The products are not designed for use in equipment which require specialized quality and/or reliability, or in equipment which could have applications in hazardous environments, aerospace industry, or medical field. Please contact us if you intend our products to be used in these special applications.

ISC makes no warranty or guarantee regarding the suitability of its products for any particular purpose, nor does ISC assume any liability arising from the application or use of any products, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages.