


## Three-terminal positive voltage regulator

**BL78M06**

### FEATURES

- Output current in excess of 0.5A.
- No external components..
- Internal thermal overload protection.
- Internal short circuit current-limiting.
- Output transistor safe-area compensation.

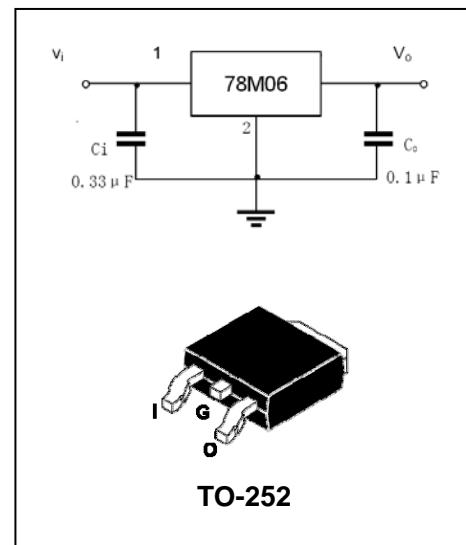

### APPLICATIONS

- Three-terminal positive voltage regulator.

### MAXIMUM RATING

operating temperature range applies unless otherwise specified

Symbol	Parameter	Value	Units
V <sub>I</sub>	Input voltage	35	V
P <sub>D</sub>	Power Dissipation	1.25	W
R <sub>θ JA</sub>	Thermal Resistance Junction-Air	92	°C/W
T <sub>OPR</sub>	Operating junction temperature	0 to 150	°C
T <sub>stg</sub>	Storage temperature range	-65 to +150	°C

**Three-terminal positive voltage regulator****BL78M06****ELECTRICAL CHARACTERISTICS**(V<sub>IN</sub>=11V,I<sub>O</sub>=350mA,C<sub>IN</sub>=0.33μF,C<sub>O</sub>=0.1μF,unless otherwise specified)

Parameter	Symbol	Test conditions	MIN	TYP	MAX	UNIT
Output voltage	V <sub>O</sub>	I <sub>O</sub> =350mA,V <sub>IN</sub> =11V 5mA≤I <sub>O</sub> ≤350mA 8V≤V <sub>IN</sub> ≤21V	5.75 5.7 5.7	6 6 6	6.25 6.3 6.3	V
Load regulation(Note1)	△Reg <sub>load</sub>	5mA≤I <sub>O</sub> ≤500mA 5mA≤I <sub>O</sub> ≤200mA			120 60	mV
Line regulation(Note1)	△Reg <sub>line</sub>	8V≤V <sub>IN</sub> ≤25V,I <sub>O</sub> =200mA 9V≤V <sub>IN</sub> ≤25V, I <sub>O</sub> =200mA			100 50	mV
Quiescent Current	I <sub>Q</sub>	V <sub>IN</sub> =11V,I <sub>O</sub> =350mA		4.0	6.0	mA
Quiescent Current Change	△I <sub>Q</sub>	5mA≤I <sub>O</sub> ≤350mA 9V≤V <sub>IN</sub> ≤25V,I <sub>O</sub> =200mA			0.5 0.8	mA
Output Voltage Drift	△V/△T	I <sub>O</sub> =5mA, T <sub>J</sub> =0 to +125°C		-0.5		mV/°C
Output Noise Voltage	V <sub>N</sub>	10Hz≤f≤100KHz		45		μV/V <sub>O</sub>
Ripple Rejection	RR	f=120Hz,I <sub>O</sub> =300mA, V <sub>I</sub> =11.5V to 21.5V	59			dB
Dropout Voltage	V <sub>D</sub>	T <sub>A</sub> =+25°C,I <sub>O</sub> =500mA		2.0		V
Short Circuit Current	I <sub>SC</sub>	V <sub>I</sub> =35V,T <sub>J</sub> =25°C		300		mA
Peak Current	I <sub>PK</sub>	T <sub>J</sub> =25°C		700		mA

Note:1.Load and line regulation are specified at constant,junction temperature.Change in V<sub>O</sub> due to Heating effects must be taken into account separately.Pulse testing with low duty is used.


## Three-terminal positive voltage regulator

**BL78M06**

### PACKAGE OUTLINE


Plastic surface mounted package

TO-252

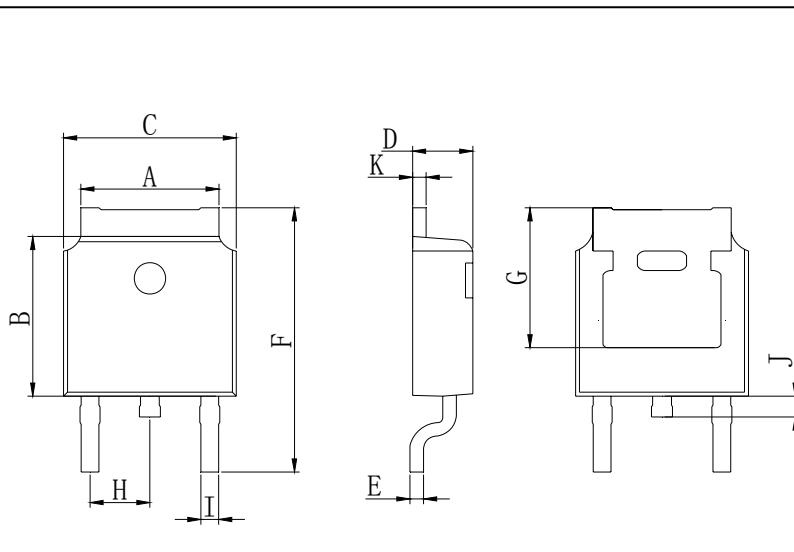

TO-252		
A	4.95	5.59
B	5.40	6.63
C	6.05	7.10
D	2.20	2.40
E	0.40	0.61
F	8.80	10.60
G	5.35 Typ.	
H	1.98	2.59
I	0.50	0.90
J	0.50	1.20
K	0.45	0.89
All Dimensions in mm		

### SOLDERING FOOTPRINT

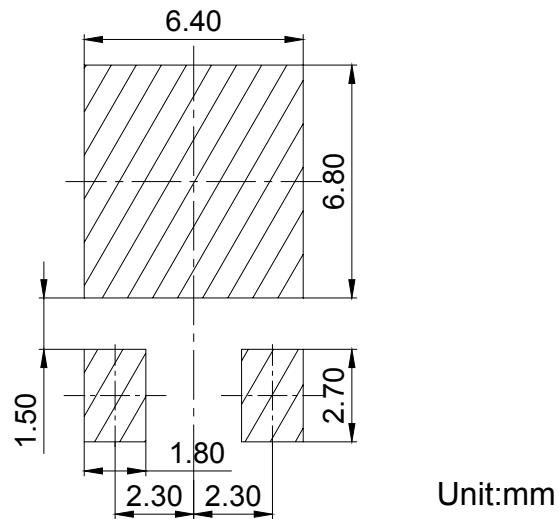

## Three-terminal positive voltage regulator

**BL78M06**

### PACKAGE INFORMATION

Device	Package	Shipping
BL78M06	TO-252	80PCS/Tube
		2500PCS/Tape&Reel