

Outline:

BL8506D is a series of high precision voltage detector with ultra low current consumption (250nA typ. at $V_{DD}=V_{TH}+1V$). It can work at very low voltage, which makes it perfect for system reset.

BL8506D is composed of high precision voltage reference, comparator, output driver and resistor array. Internally preset detect voltage has a low temperature drift and requires no external trimming.

Two type of output, CMOS and N-channel open-drain are available.

BL8506D is available in SOT-89-3, SOT-23-3 TO92, SOT23-5 packages which is Pb free.

Features:

- High-precision detection Voltage:
0.8V~1.9V: $\pm 0.8\%$
2.0V~6.0V: $\pm 0.5\%$
- Detection Voltage: 0.8V~6.0V (in 0.1V steps)
- Precise hysteresis
- Operating Voltage range: 0.7V~10V
- Ultra-low current consumption: 250nA typ. (at $V_{DD}=V_{TH}+1V$)
- Two Output forms : CMOS and N-channel open-drain

Application:

- Power monitor for portable equipment such as PDA, DSC, Mobile phone, Notebook, MP3
- CPU and Logic Circuit Reset
- Battery Checker
- Battery Back-up Circuit

Selection Guide:

8506D-XX X XX


Package Type:
 RM: SOT-23-3
 RN: SOT-23-5
 SM: SOT-89-3
 T: TO-92
 (Default, Pb Free)

Output Type:
 N: Nch Open-drain
 C: CMOS

Detector Voltage:
 09.....0.9V
 30.....3.0V

 50.....5.0V
 60.....6.0V

Pin Assignment:

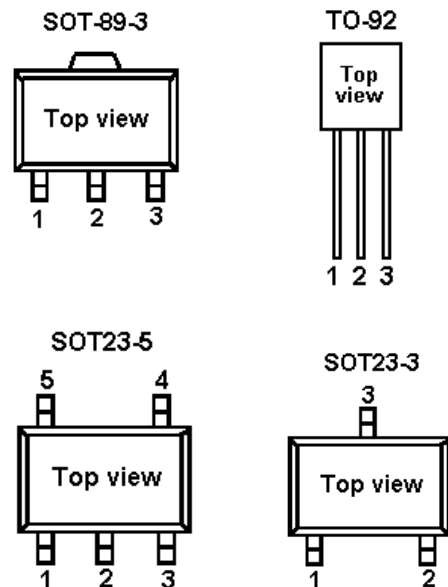



Pin Description:


| PIN Number | | | | PIN Name | Function |
|------------|-------|----------|----------|----------|------------------------------|
| SOT-89-3 | TO-92 | SOT-23-3 | SOT-23-5 | | |
| 1 | 3 | 1 | 1 | VOUT | Voltage detection output Pin |
| 2 | 1 | 3 | 2 | VDD | Voltage input Pin |
| 3 | 2 | 2 | 3 | VSS | GND Pin |
| — | — | — | 4 | NC | No connection |
| — | — | — | 5 | NC | No connection |

Product Classification:


| Product Name | Detector Voltage | Output Type | Package |
|---------------|------------------|----------------|----------|
| BL8506D-XXNRM | XX V | Nch Open-Drain | SOT-23-3 |
| BL8506D-XXNRN | XX V | Nch Open-Drain | SOT-23-5 |
| BL8506D-XXNSM | XX V | Nch Open-Drain | SOT-89-3 |
| BL8506D-XXNT | XX V | Nch Open-Drain | TO-92 |
| BL8506D-XXCRM | XX V | CMOS | SOT-23-3 |
| BL8506D-XXCRN | XX V | CMOS | SOT-23-5 |
| BL8506D-XXCSM | XX V | CMOS | SOT-89-3 |
| BL8506D-XXCT | XX V | CMOS | TO-92 |

Product Mark Information:

| SOT-89-3 TO-92 | SOT-23-5 SOT-23-3 |
|--|--|
| Example: BL8506D-30NSM  8506D NYWW/30 Y: Year WW: Week | Example: BL8506D-30NRM  J1YW YW: Data Code |

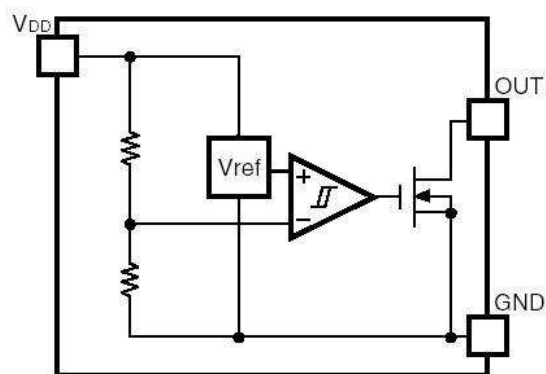Block diagram:


N channel open-drain

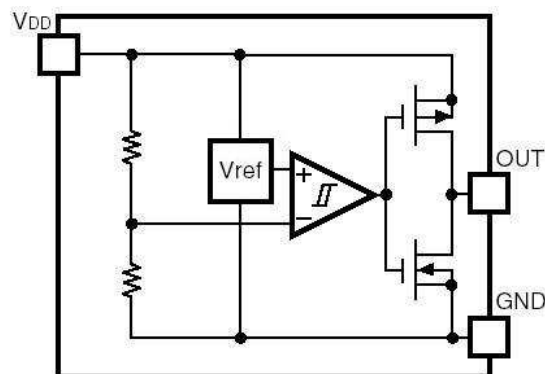

CMOS output

Absolute Maximum Ratings:

| Parameter | Symbol | Rating | Unit |
|-----------------------|--------|--------------|------|
| Supply Voltage | VDDmax | -0.3 ~ +12.0 | V |
| Output Voltage | OUT | -0.3 ~ +12.0 | V |
| Input Current | IDD | 20 | mA |
| Output Current | IOUT | 20 | mA |
| Power Dissipation | PD | 150 | mW |
| Operating Temperature | Topr | -40 ~ +105 | °C |
| Storage Temperature | Tstg | -65 ~ +150 | °C |

Recommended Work Conditions:

| Parameter | Symbol | Rating | Unit |
|-----------------------|--------|---------------|------|
| Operating Temperature | Topr | -40 ~ +105 | °C |
| Supply Voltage | VDD | +0.70 ~ +10.0 | V |

Electrical Characteristics:

(Typical values are at Ta=+25°C)

| Parameter | Symbol | Test Condition | Rank | MIN. | TYP. | MAX. | Unit | Circuit |
|-----------------|-----------------|----------------------------------|--------|--------|-------|--------|------|---------|
| Reset Threshold | V _{TH} | 上段 Ta=+25°C 下段 Ta=-40°C~+85°C | 8208 | 0.7936 | 0.800 | 0.8064 | V | 2 |
| | | | | 0.7800 | - | 0.8200 | | |
| | | | 8209 | 0.8928 | 0.900 | 0.9072 | | |
| | | | | 0.8775 | - | 0.9225 | | |
| | | | 8210 | 0.9920 | 1.000 | 1.0080 | | |
| | | | | 0.9750 | - | 1.0250 | | |
| | | | 8211 | 1.0912 | 1.100 | 1.1088 | | |
| | | | | 1.0725 | - | 1.1275 | | |
| | | | 8212 | 1.1904 | 1.200 | 1.2096 | | |
| | | | | 1.1700 | - | 1.2300 | | |
| | | | 8213 | 1.2896 | 1.300 | 1.3104 | | |
| | | | | 1.2675 | - | 1.3325 | | |
| | | | 8214 | 1.3888 | 1.400 | 1.4112 | | |
| | | | | 1.3650 | - | 1.4350 | | |
| | | | 8215 | 1.4880 | 1.500 | 1.5120 | | |
| | | | | 1.4625 | - | 1.5375 | | |
| | | | 8216 | 1.5872 | 1.600 | 1.6128 | | |
| | | | | 1.5600 | - | 1.6400 | | |
| | | | 8217 | 1.6864 | 1.700 | 1.7136 | | |
| | | | | 1.6575 | - | 1.7425 | | |
| | | | 8218 | 1.7856 | 1.800 | 1.8144 | | |
| | | | | 1.7550 | - | 1.8450 | | |
| | | | 8219 | 1.8848 | 1.900 | 1.9152 | | |
| | | | | 1.8525 | - | 1.9475 | | |
| | | | 8220 | 1.9900 | 2.000 | 2.0100 | | |
| | | | | 1.9500 | - | 2.0500 | | |
| | | | 8221 | 2.0895 | 2.100 | 2.1105 | | |
| | | | | 2.0475 | - | 2.1525 | | |
| | | | 8222 | 2.1890 | 2.200 | 2.2110 | | |
| | | | | 2.1450 | - | 2.2550 | | |
| | | | 8223 | 2.2885 | 2.300 | 2.3115 | | |
| | | | | 2.2425 | - | 2.3575 | | |
| 8224 | 2.3880 | 2.400 | 2.4120 | | | | | |
| | 2.3400 | - | 2.4600 | | | | | |
| 8225 | 2.4875 | 2.500 | 2.5125 | | | | | |
| | 2.4375 | - | 2.5625 | | | | | |
| 8226 | 2.5870 | 2.600 | 2.6130 | | | | | |
| | 2.5350 | - | 2.6650 | | | | | |
| 8227 | 2.6865 | 2.700 | 2.7135 | | | | | |
| | 2.6325 | - | 2.7675 | | | | | |
| 8228 | 2.7860 | 2.800 | 2.8140 | | | | | |
| | 2.7300 | - | 2.8700 | | | | | |

(Note2)

| | | | | | |
|------|--------|-------|--------|--|--|
| 8229 | 2.8855 | 2.900 | 2.9145 | | |
| | 2.8275 | - | 2.9725 | | |
| 8230 | 2.9850 | 3.000 | 3.0150 | | |
| | 2.9250 | - | 3.0750 | | |

| Parameter | Symbol | Test Condition | Rank | MIN. | TYP. | MAX. | Unit | Circuit |
|--------------------------------|-----------------|--|-------|--------|--------|--------|------|---------|
| Reset Threshold (Note2) | V_{TH} | 上段 $T_a=+25^{\circ}C$ 下段 $T_a=-40^{\circ}C \sim +85^{\circ}C$ | 8254 | 5.3730 | 5.4000 | 5.4270 | V | 2 |
| | | | | 5.2650 | - | 5.5350 | | |
| | | | 8255 | 5.4725 | 5.5000 | 5.5275 | | |
| | | | | 5.3625 | - | 5.6375 | | |
| | | | 8256 | 5.5720 | 5.6000 | 5.6280 | | |
| | | | | 5.4600 | - | 5.7400 | | |
| | | | 8257 | 5.6715 | 5.7000 | 5.7285 | | |
| | | | | 5.5575 | - | 5.8425 | | |
| | | | 8258 | 5.7710 | 5.8000 | 5.8290 | | |
| | | | | 5.6550 | - | 5.9450 | | |
| | | | 8259 | 5.8705 | 5.9000 | 5.9295 | | |
| | | | | 5.7525 | - | 6.0475 | | |
| | | | 8260 | 5.9700 | 6.0000 | 6.0300 | | |
| | | | | 5.8500 | - | 6.1500 | | |
| Reset Threshold Hysteresis | ΔV_{TH} | VDD=0V→VTH+1V→0V | 8208 | 0.000 | 0.000 | 0.000 | V | 2 |
| | | | 8209 | 0.000 | 0.000 | 0.000 | | |
| | | | 8210 | 0.000 | 0.000 | 0.000 | | |
| | | | 8211 | 0.000 | 0.000 | 0.000 | | |
| | | | 8212 | 0.000 | 0.000 | 0.000 | | |
| | | | 8213 | 0.000 | 0.000 | 0.000 | | |
| | | | 8214 | 0.000 | 0.000 | 0.000 | | |
| | | | 8215 | 0.000 | 0.000 | 0.000 | | |
| | | | 8216 | 0.000 | 0.000 | 0.000 | | |
| | | | 8217 | 0.000 | 0.000 | 0.000 | | |
| | | | 8218 | 0.000 | 0.000 | 0.000 | | |
| | | | 8219 | 0.000 | 0.000 | 0.000 | | |
| | | | 8220 | 0.000 | 0.000 | 0.000 | | |
| | | | 8221 | 0.000 | 0.000 | 0.000 | | |
| | | | 8222 | 0.000 | 0.000 | 0.000 | | |
| | | | 8223 | 0.000 | 0.000 | 0.000 | | |
| | | | 8224 | 0.000 | 0.000 | 0.000 | | |
| | | | 8225 | 0.000 | 0.000 | 0.000 | | |
| 8226 | 0.000 | 0.000 | 0.000 | | | | | |
| 8227 | 0.000 | 0.000 | 0.000 | | | | | |
| 8228 | 0.000 | 0.000 | 0.000 | | | | | |
| 8229 | 0.000 | 0.000 | 0.000 | | | | | |
| 8230 | 0.000 | 0.000 | 0.000 | | | | | |
| 8231 | 0.000 | 0.000 | 0.000 | | | | | |


| | | | | | | | | |
|--|--|--|------|-------|-------|-------|--|--|
| | | | 8232 | 0.000 | 0.000 | 0.000 | | |
| | | | 8233 | 0.000 | 0.000 | 0.000 | | |
| | | | 8234 | 0.000 | 0.000 | 0.000 | | |
| | | | 8235 | 0.000 | 0.000 | 0.000 | | |
| | | | 8236 | 0.000 | 0.000 | 0.000 | | |
| | | | 8237 | 0.000 | 0.000 | 0.000 | | |
| | | | 8238 | 0.000 | 0.000 | 0.000 | | |
| | | | 8239 | 0.000 | 0.000 | 0.000 | | |
| | | | 8240 | 0.000 | 0.000 | 0.000 | | |

| Parameter | Symbol | Test Condition | Rank | MIN. | TYP. | MAX. | Unit | Circuit |
|-----------------------------------|--------------------------------------|--|---------------|-------|-------|-------|------------|---------|
| Reset Threshold Hysteresis | ΔV_{TH} | VDD=0V→V _{TH} +1V→0V | 8241 | 0.000 | 0.000 | 0.000 | V | 2 |
| | | | 8242 | 0.000 | 0.000 | 0.000 | | |
| | | | 8243 | 0.000 | 0.000 | 0.000 | | |
| | | | 8244 | 0.000 | 0.000 | 0.000 | | |
| | | | 8245 | 0.000 | 0.000 | 0.000 | | |
| | | | 8246 | 0.000 | 0.000 | 0.000 | | |
| | | | 8247 | 0.000 | 0.000 | 0.000 | | |
| | | | 8248 | 0.000 | 0.000 | 0.000 | | |
| | | | 8249 | 0.000 | 0.000 | 0.000 | | |
| | | | 8250 | 0.000 | 0.000 | 0.000 | | |
| | | | 8251 | 0.000 | 0.000 | 0.000 | | |
| | | | 8252 | 0.000 | 0.000 | 0.000 | | |
| | | | 8253 | 0.000 | 0.000 | 0.000 | | |
| | | | 8254 | 0.000 | 0.000 | 0.000 | | |
| | | | 8255 | 0.000 | 0.000 | 0.000 | | |
| | | | 8256 | 0.000 | 0.000 | 0.000 | | |
| | | | 8257 | 0.000 | 0.000 | 0.000 | | |
| 8258 | 0.000 | 0.000 | 0.000 | | | | | |
| 8259 | 0.000 | 0.000 | 0.000 | | | | | |
| 8260 | 0.000 | 0.000 | 0.000 | | | | | |
| Supply Current | I _{DD} | VDD=V _{TH} +1V | 8208~ 8260 | — | 0.25 | 1.0 | μA | 1 |
| Reset Threshold Temp. Coefficient | $\Delta V_{TH}/^{\circ}C$ (Note2) | Ta=-40°C~+85°C | 8208~ 8260 | — | ±100 | — | ppm/ °C | 2 |
| L transfer delay time | (Note2) t _{PHL} | VDD=V _{TH} +0.4V→V _{TH} -0.4V (Note2) | 8208~ 8260 | 2 | 15 | 100 | μs | 4 |
| H transfer delay time | t _{PLH} (Note2) | VDD=V _{TH} -0.4V→V _{TH} +0.4V (Note2) | 8208~ 8260 | 2 | 15 | 100 | μs | 4 |
| "L" Output Current | I _{OL1} | VDD=0.7V, VDS=0.05V | 8208~ 8260 | 0.01 | 0.10 | — | mA | 3 |


| | | | | | | | | |
|------------------------|-----------|--|---------------|------|------|-----|---------|---|
| | I_{OL2} | VDD=1.2V, VDS=0.5V $V_{TH} \cong 1.3V$ | 8213~ 8260 | 0.23 | 2.00 | — | | |
| | I_{OL3} | VDD=2.4V, VDS=0.5V $V_{TH} \cong 2.5V$ | 8225~ 8260 | 1.60 | 8.00 | — | | |
| | I_{OL4} | VDD=3.6V, VDS=0.5V $V_{TH} \cong 3.7V$ | 8237~ 8260 | 3.20 | 12.0 | — | | |
| Output Leakage Current | I leak | VDD=10V, OUT=10V (IC-PST82XX series only) | 8208~ 8260 | — | — | 0.1 | μA | 3 |

Test Circuit:


1)

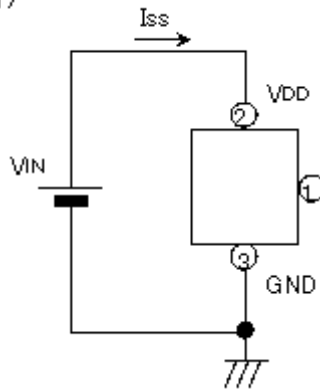


2)

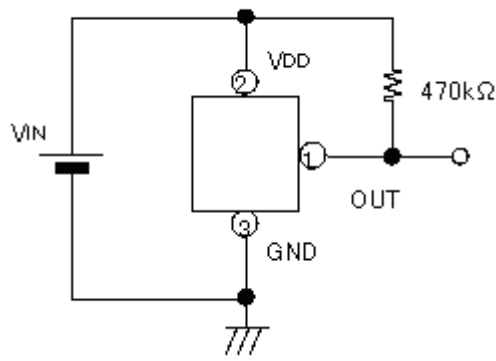


3)

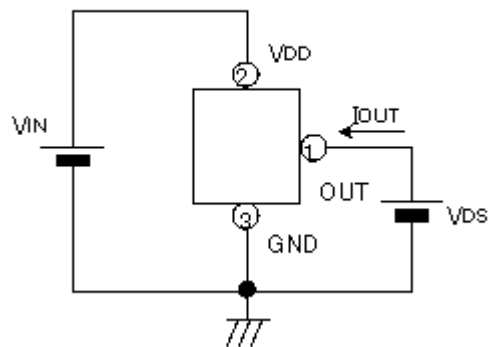


4)

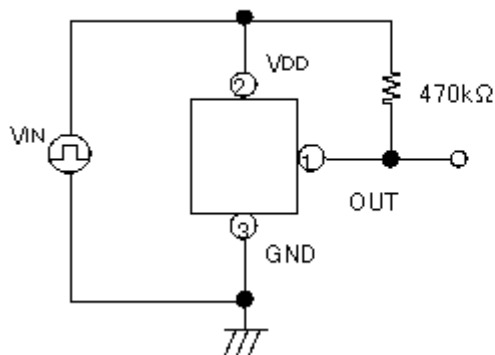


Input Voltage




Output Voltage



Timing Chart:

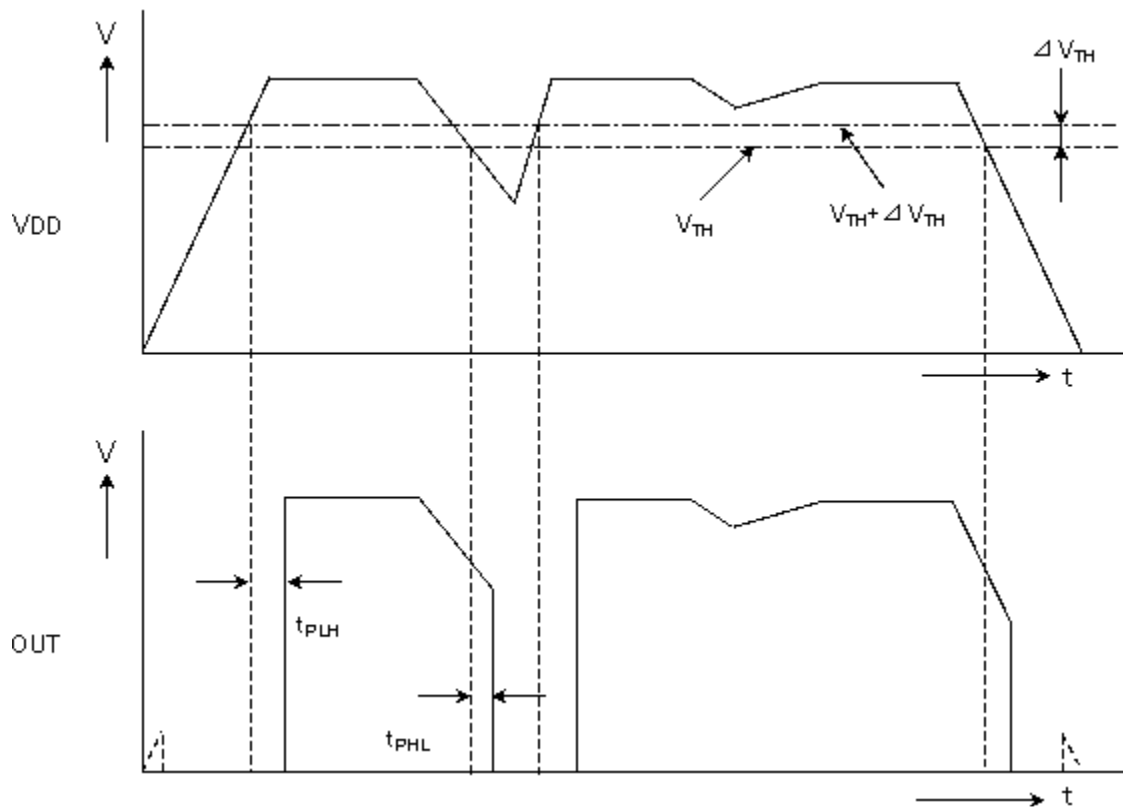

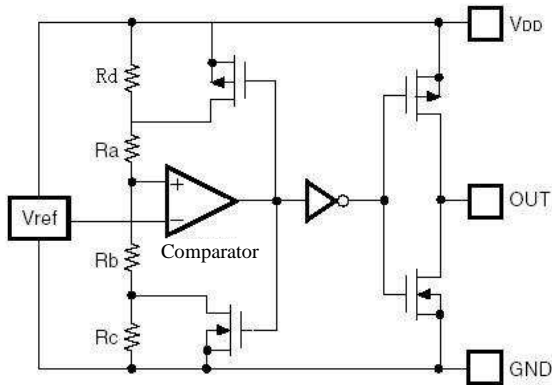Function description:


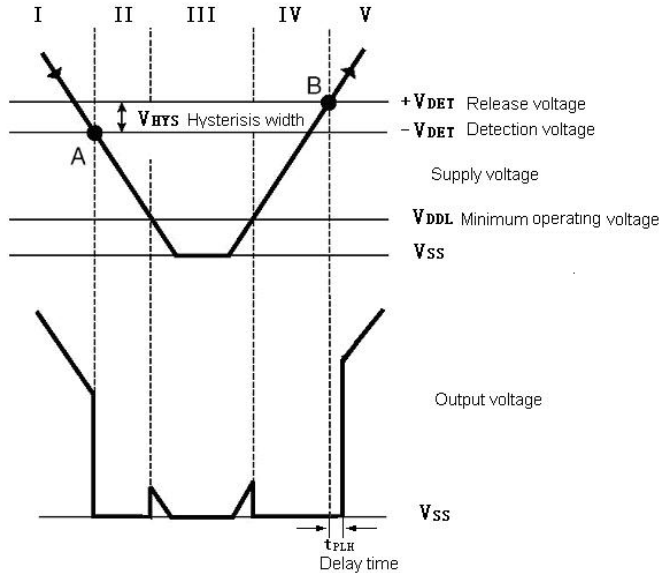
High precision low temperature co-efficiency reference voltage is applied to the negative input of a comparator. Input voltage, divided by resistor array of Ra Rb and Rc, is applied to the positive input of the comparator. Output of the comparator controls a pair of NMOS and PMOS switches, generating the hysteresis. Output of the comparator passes a series of buffer to drive the output CMOS pair.

+ V_{DET}, - V_{DET}, V_{HYS} can be calculated as follows:

$$- V_{DET} = V_{REF} * (1 + R_a / (R_b + R_c))$$







$$+ V_{DET} = V_{REF} * (1 + (R_a + R_d) / R_b) = V_{REF} * (1 + (R_a + R_c) / R_b)$$

$$V_{HYS} = + V_{DET} - (- V_{DET}) = V_{REF} * (R_a + R_b + R_c) * (1 / R_b - 1 / (R_b + R_c))$$




| No. | Operation status | Output status |
|-----|--|--|
| I | V _{DD} > +V _{DET} | Output voltage is equal to the supply voltage |
| II | V _{DD} drops below -V _{DET} | Output voltage equals to GND level |
| III | V _{DD} drops further below V _{DDL} | Output voltage is undefined |
| IV | V _{DD} rises above V _{DDL} | Output voltage equals to GND level |
| V | V _{DD} rises above +V _{DET} | Output voltage equals to supply voltage, V _{HYS} =(+V _{DET})-(-V _{DET}) |



Typical Performance Characteristics:

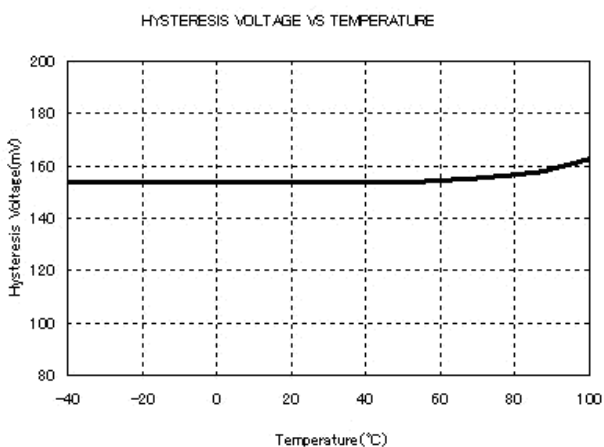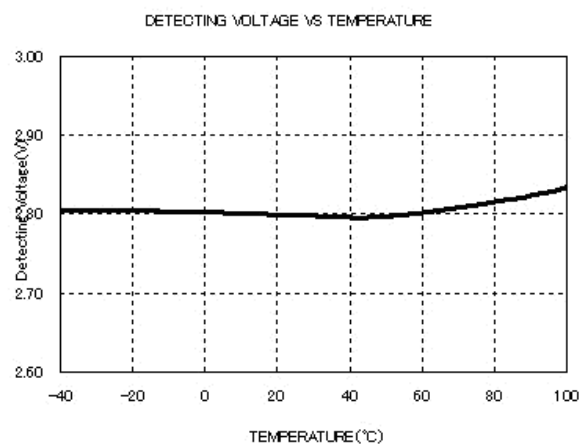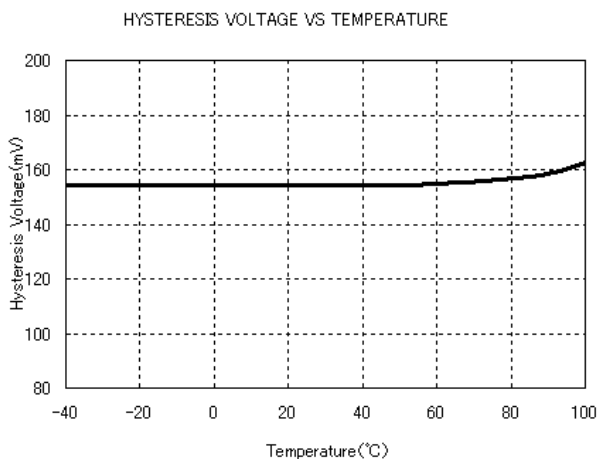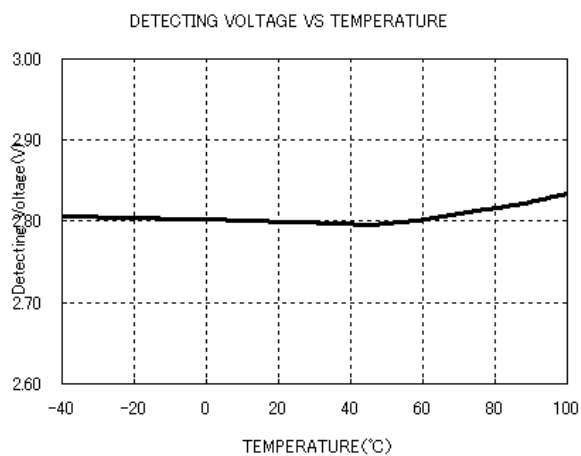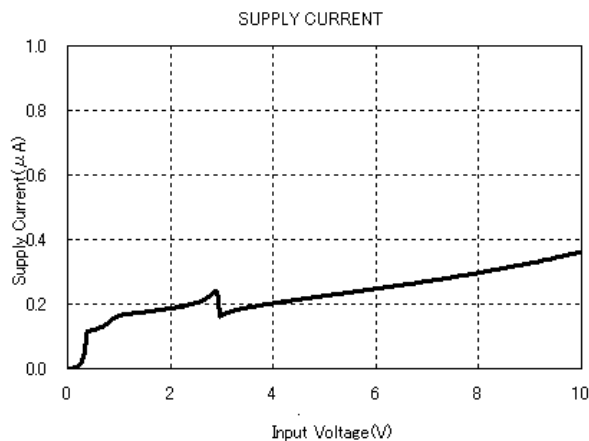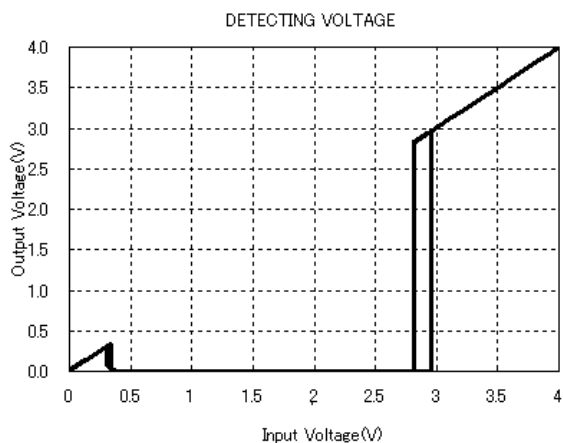

"L" OUTPUT CURRENT₃ VS TEMPERATURE

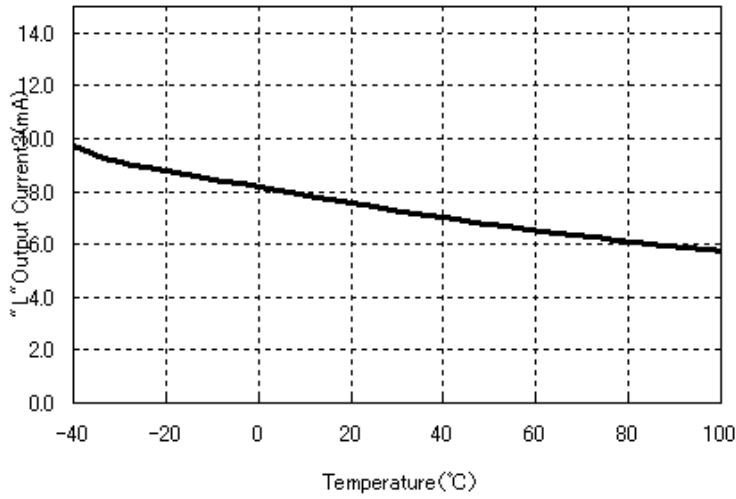


Typical applications:

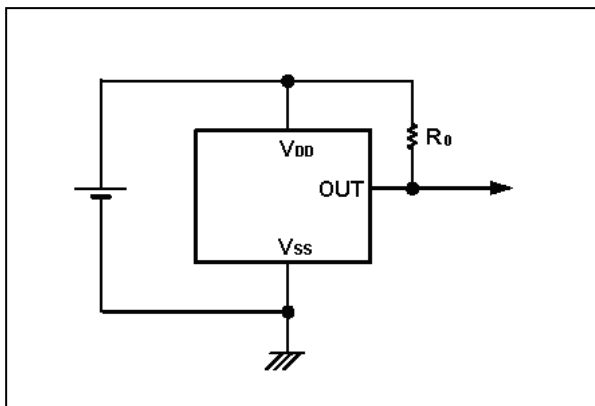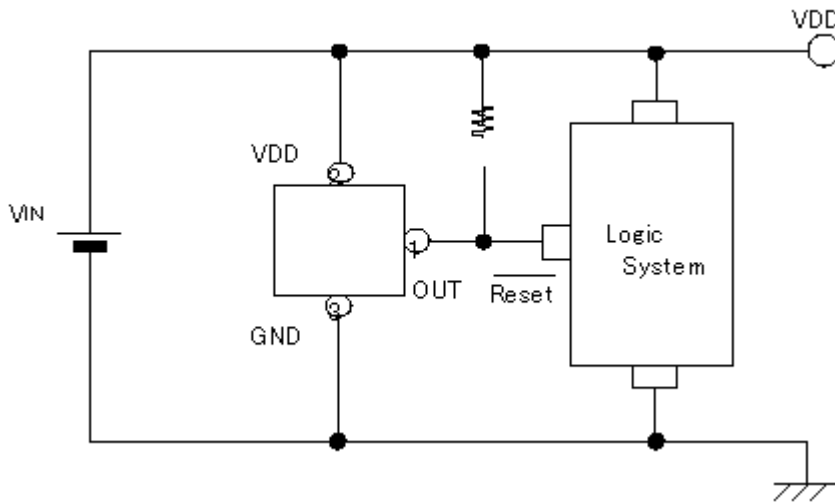


Note:

1. R_0 is unnecessary for CMOS output products.
2. The value of R_0 need to be selected in different application, Typical value is $470k\ \Omega$

Package Outline:
SOT-23-3:
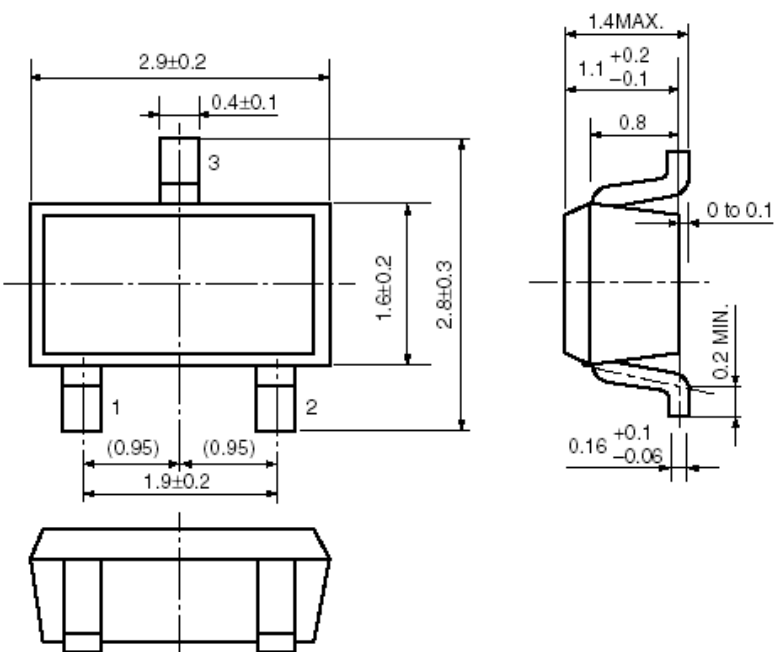
| Package | SOT-23-3 | Devices per reel | 3000 | Unit | mm |
|--|----------|------------------|------|------|----|
| Package dimension:  <p> Top view dimensions: Total width 2.9 ± 0.2, distance between leads 1.9 ± 0.2, lead width 0.4 ± 0.1, lead spacing (0.95), body width 1.6 ± 0.2, body height 2.8 ± 0.3. </p> <p> Side view dimensions: Maximum height 1.4 MAX., lead height $1.1^{+0.2}_{-0.1}$, lead width 0.8, lead thickness $0 \text{ to } 0.1$, lead angle 0.2 MIN., lead bottom width $0.16^{+0.1}_{-0.06}$. </p> | | | | | |

SOT-23-5:
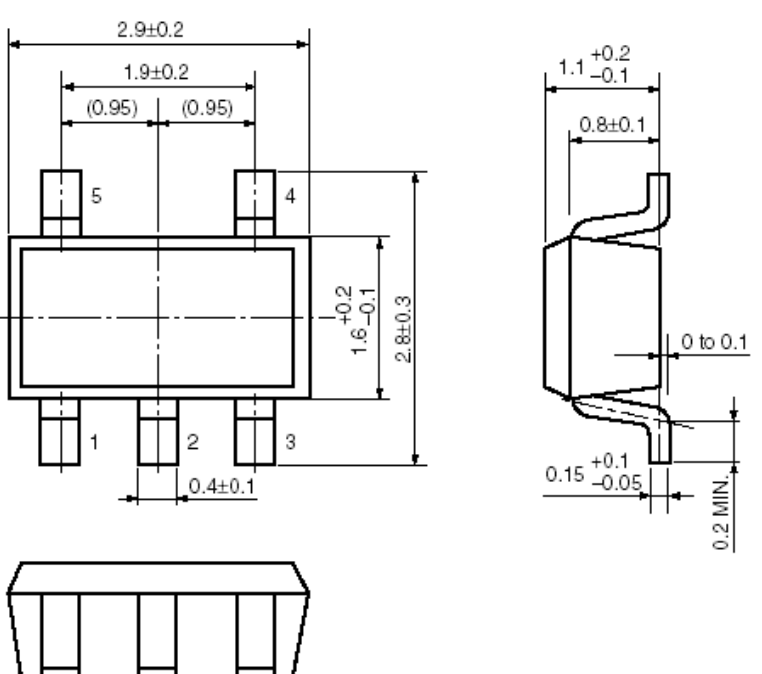
| Package | SOT-23-5 | Devices per reel | 3000 | Unit | mm |
|---|----------|------------------|------|------|----|
| Package dimension:  <p> Top view dimensions: Total width 2.9 ± 0.2, distance between leads 1.9 ± 0.2, lead width 0.4 ± 0.1, lead spacing (0.95), body width $1.6^{+0.2}_{-0.1}$, body height 2.8 ± 0.3. </p> <p> Side view dimensions: Lead height $1.1^{+0.2}_{-0.1}$, lead width 0.8 ± 0.1, lead thickness $0 \text{ to } 0.1$, lead angle 0.2 MIN., lead bottom width $0.15^{+0.1}_{-0.05}$. </p> | | | | | |