

FEATURES

- Two low dropout voltage regulators
- 300mA output current for each LDO
- 20uA operating supply current per LDO
- Low 47uVRMS output noise
- Standby Mode: 0.1uA
- Low 160mV dropout at 300mA load
- 73dB PSRR at 100Hz
- Excellent Line regulation: 0.05%/V
- Independent Shutdown controls
- 1.5V to 4.5V Factory-Preset Output
- Output Current Limit
- High Accuracy: $\pm 2\%$ ($\pm 1\%$ customized)

APPLICATIONS

- Cellular phones
- Cordless phones and radio communication equipment
- Battery Powered equipment
- Notebook and hand-hold equipment
- Wireless LAN
- GPS receivers

ORDERING INFORMATION

BL8566 -X X XX

Package: R6: SOT-23-6
 Operating temperature range
 C: commercial standard
 P: Pb free
 Output Voltage:

Code	Vout1	Vout2	Code	Vout1	Vout2
B	1.5V	2.8V	N	2.8V	2.5V
C	1.5V	3.0V	O	2.8V	2.8V
D	1.5V	3.3V	P	2.8V	3.0V
E	1.5V	4.0V	Q	3.0V	2.5V
G	1.8V	2.5V	R	3.0V	3.0V
H	1.8V	2.8V	S	3.0V	3.3V
I	1.8V	3.0V	T	3.3V	1.8V
J	1.8V	3.3V	V	3.3V	2.8V
M	2.8V	1.8V			

DESCRIPTION


The BL8566 is a dual, low-noise, low-dropout regulator delivering at least 300mA of continuous output current. The output voltage for each regulator is set independently by trimming. Voltages are selectable in 100mV steps within a range of 1.5V to 4.5V. Typical output noise is 47uVrms, and PSRR is 73dB at 100Hz. The BL8566 includes two independent logic-controlled shutdown inputs and allows the output of each regulator to be turned on independently.

The BL8566 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.

The BL8566 has excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

The BL8566 is available in SOT-23-6 package which is lead(Pb)-free

TYPICAL APPLICATION

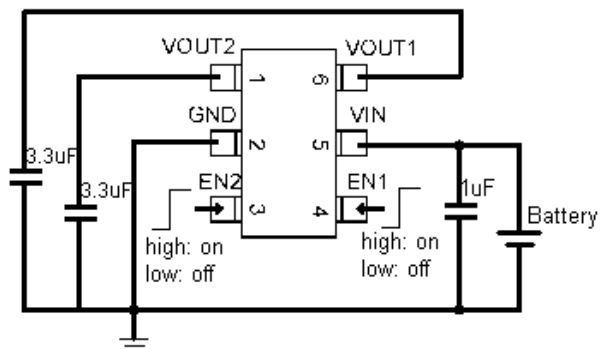

APPLICATION HINTS

NOTE: Input capacitor ($C_{in}=1\mu F$) and Output capacitor ($C_{out}=1\mu F/3.3\mu F$) are recommended in all application circuit.

Dual 300mA High PSRR Linear Regulator

MARKING DESCRIPTION

L: Product Code

X: Output Voltage

Code	Vout1	Vout2	Code	Vout1	Vout2
B	1.5V	2.8V	N	2.8V	2.5V
C	1.5V	3.0V	O	2.8V	2.8V
D	1.5V	3.3V	P	2.8V	3.0V
E	1.5V	4.0V	Q	3.0V	2.5V
G	1.8V	2.5V	R	3.0V	3.0V
H	1.8V	2.8V	S	3.0V	3.3V
I	1.8V	3.0V	T	3.3V	1.8V
J	1.8V	3.3V	V	3.3V	2.8V
M	2.8V	1.8V			

Z: The Year of manufacturing, "7" stands for year 2007, "8" stands for year 2008, and "0" stands for year 2010.

Z: The week of manufacturing. "A" stands for week 1, "Z" stands for week 26, "A" stands for week 27, "Z" stands for week 52.

PIN CONFIGURATION

Product Classification		BL8566-XXXX	
Marking			
LXZZ	L:Product Code		
	X:Output Voltage		
	ZZ:Data Code		
Vss	Ground Pin		
Vin	Supply Voltage Input		
Vout1	CH1 Output Voltage		
CE1	Chip Enable1		
CE2	Chip Enable2		
Vout2	CH2 Output Voltage		

ABSOLUTE MAXIMUM RATING

Parameter		Value
Max Input Voltage		8V
Operating Junction Temperature(Tj)		125°C
Ambient Temperature(Ta)		-40°C -85°C
Power Dissipation	SOT-23-6	250mW
Storage Temperature(Ts)		-40°C -150°C
Lead Temperature & Time		260°C,10S

Note:

Exceed these limits to damage to the device.

Exposure to absolute maximum rating conditions may affect device reliability.

RECOMMENDED WORK CONDITIONS

Parameter	Value
Input Voltage Range	Max. 6V
Ambient Temperature	-40°C –85°C


ELECTRICAL CHARACTERISTICS

(Test Conditions: $C_{in}=1\mu F$, $C_{out}=3.3\mu F$, $T_A=25^{\circ}C$, unless otherwise specified.)

BL8566, For Arbitrary Output Voltage

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{in}	Input Voltage				6	V
V_{out}	Output Voltage	$V_{in}=\text{Set } V_{out}+1V$ $1mA \leq I_{out} \leq 30mA$	$V_{out} \times 0.98$	V_{out1}	$V_{out} \times 1.02$	V
$I_{out}(\text{Max.})$	Maximun Output Current	$V_{in}-V_{out}=1V$	300			mA
V_{drop}	Dropout Voltage, $V_{out} \geq 2.8V$	$I_{out}=100mA$		50	80	mV
		$I_{out}=300mA$		160	220	mV
$\frac{\Delta V_{out}}{\Delta V_{in} \cdot V_{out}}$	Line Regulation	$I_{out}=40mA$ $2.8V \leq V_{in} \leq 6V$		0.05	0.2	%/V
$\Delta V_{out} / \Delta I_{out}$	Load Regulation	$V_{in}=\text{Set } V_{out}+1V$ $1mA \leq I_{out} \leq 300mA$		30	50	mV
I_{ss}	Supply Current	$V_{in}=\text{Set } V_{out}+1V$		20	30	μA
$I_{standby}$	Supply Current (Standby)	$V_{in}=\text{Set } V_{out}+1V$ $V_{ce}=GND$		0.1	1.0	μA
$\frac{\Delta V_{out}}{\Delta T \cdot V_{out}}$	Output Voltage Temperature Coefficiency	$I_{out}=30mA$		± 100		ppm/ $^{\circ}C$
PSRR	Ripple Rejection	$F=100Hz$, Ripple=0.5Vp-p $V_{in}=\text{Set } V_{out}+1V$		73		dB
I_{lim}	Short Current Limit	$V_{out}=0V$		500		mA
Rpd	CE Pull down Resistance		2.0	5.0	10.0	$M\Omega$
V_{ceh}	CE Input Voltage "H"		1.5		V_{in}	V
V_{cel}	CE Input Voltage "L"		0		0.25	V
f_{en}	Output Noise	$BW=10Hz \sim 100kHz$		47		μV_{rms}

BLOCK DIAGRAM

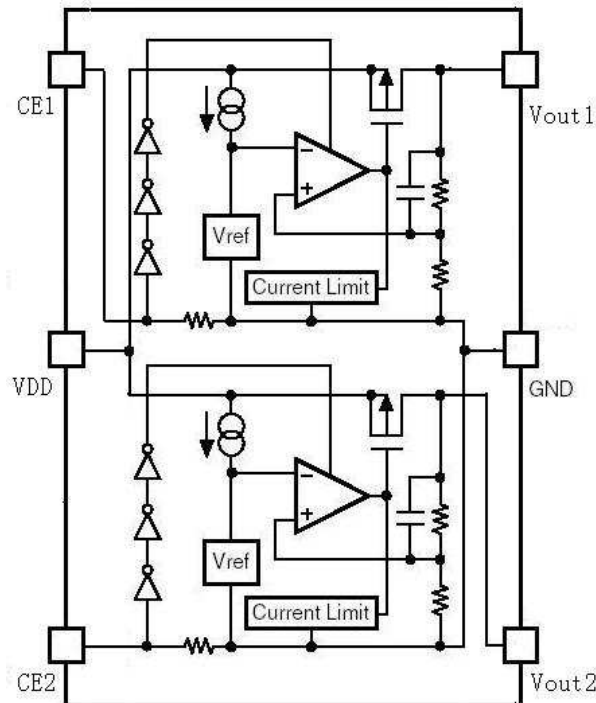

Explanation


BL8566 series are highly accurate ,Dual,low noise,CMOS low dropout voltage regulators. The output voltage for each regulator is set independently by trimming. Voltages are selectable in 100mV steps within a range of 1.5V to 4.5V . It also can be customized on command.

BL8566 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.


BL8566 has excellent load and line transient response and good temperature characteristics, which can assure the stability of chip and power system. And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.

TYPICAL PERFORMANCE CHARACTERISTICS


1) Output Voltage vs. Output Current (with output short protection)

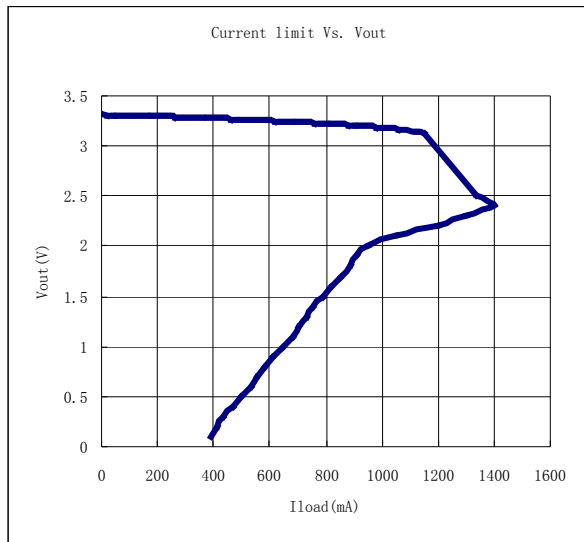


2) Output Voltage vs. Input Voltage

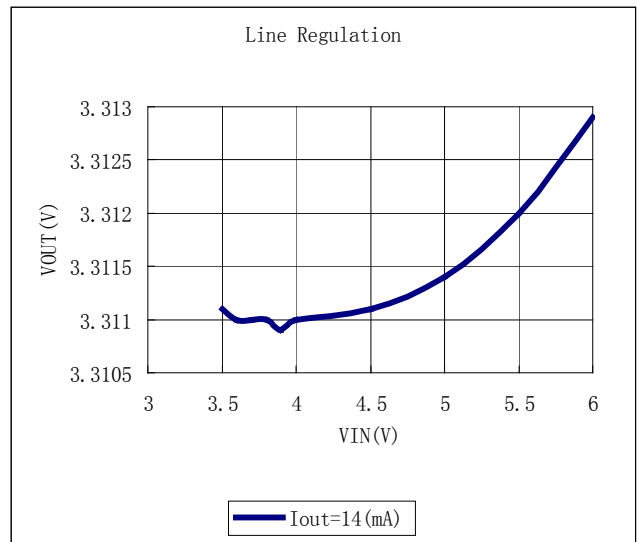

3) Dropout Voltage vs. Output Current


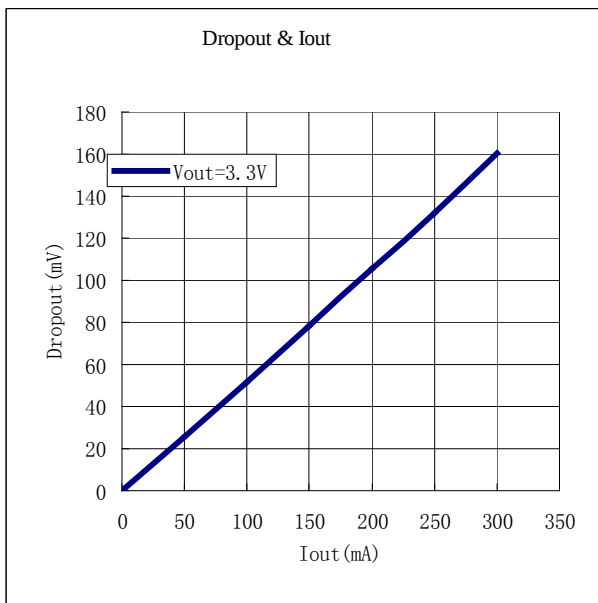


4) Ripple rejection vs. Frequency

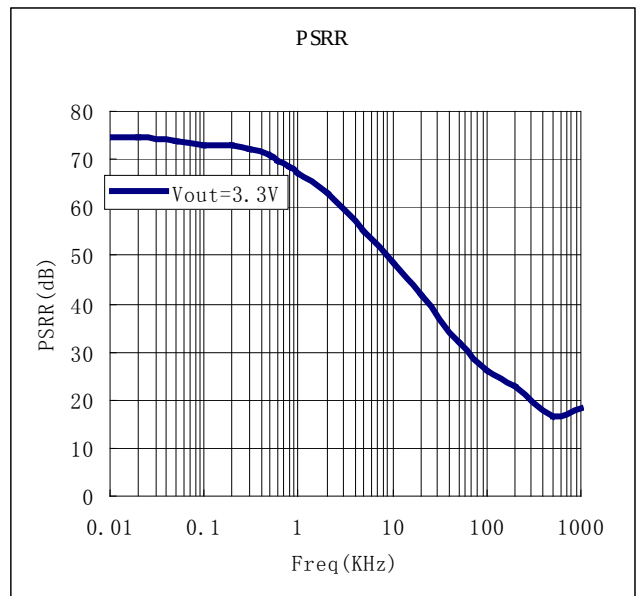



5) Line transient response

Cin=Cout=1uF Iout=25mA Vout=3.3V

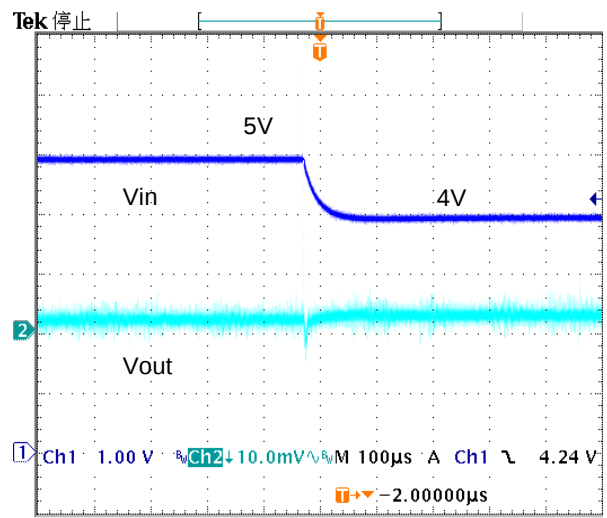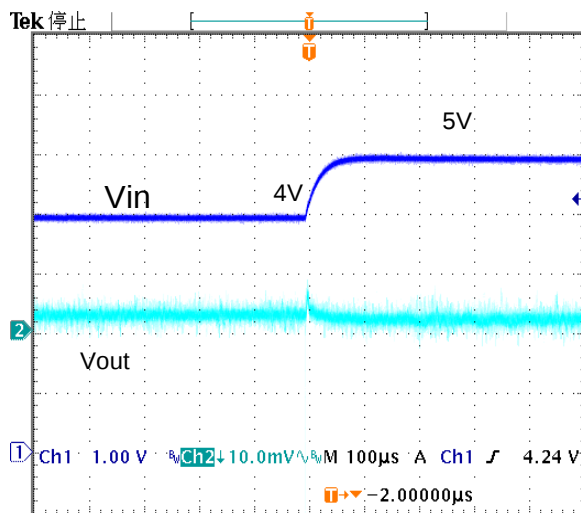


6) Load transient response


Cin=Cout=1uF Vin=4.5v Vout=3.3V

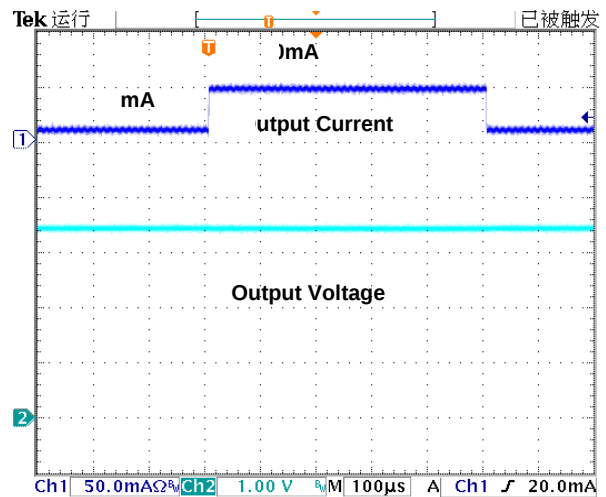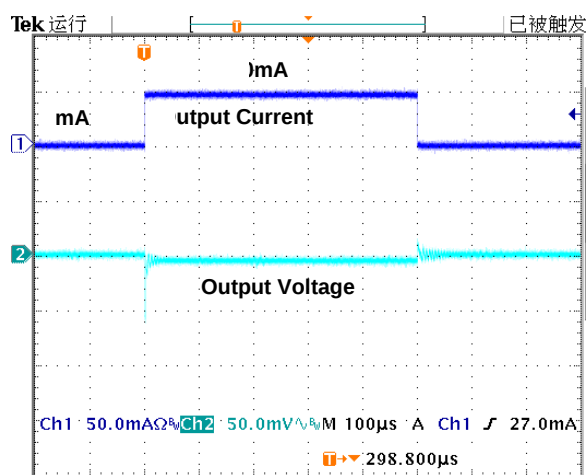


7) Start up from EN

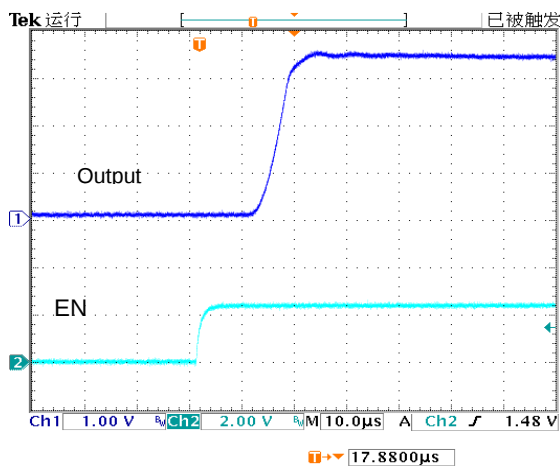

8) Shut down from EN

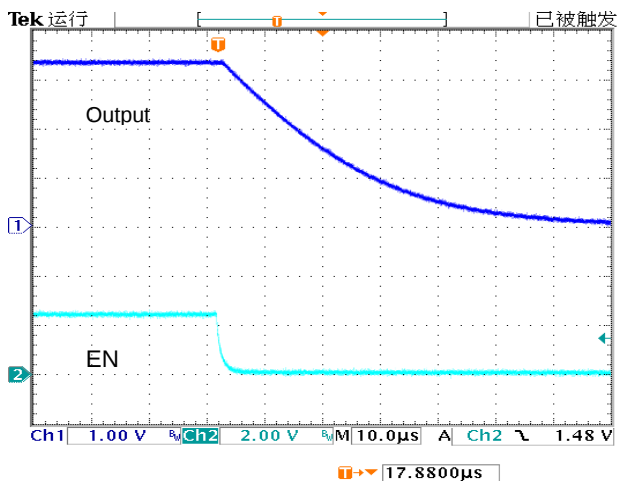

PACKAGE LINE

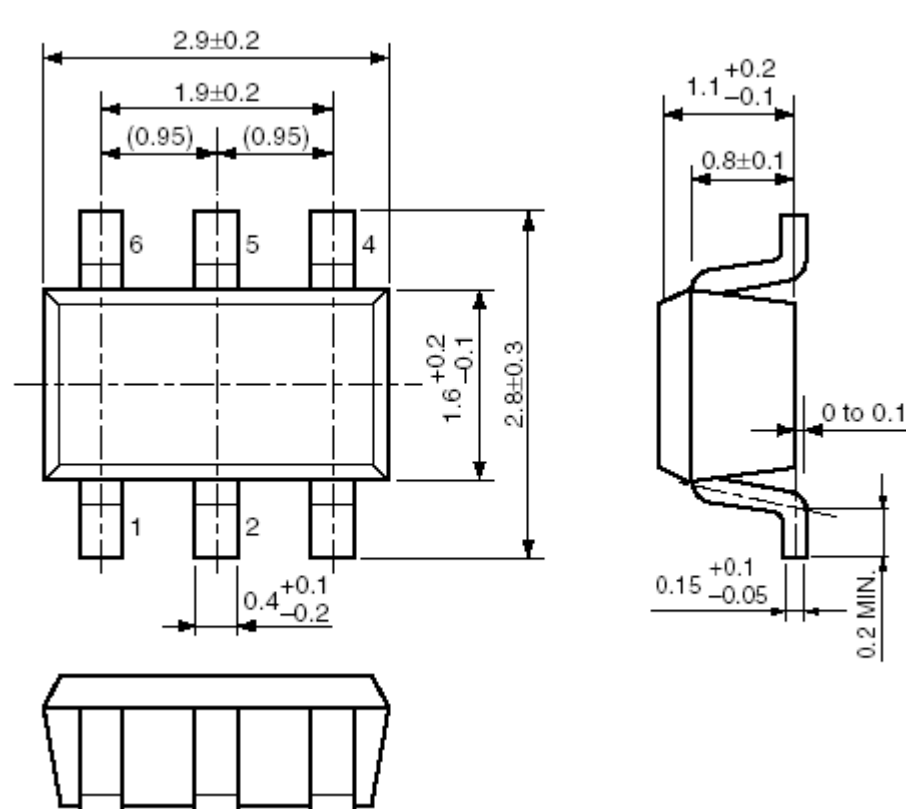Package	SOT-23-6	Devices per reel	3000Pcs	Unit	mm
Package dimension:  The diagram shows three views of the SOT-23-6 package: a top view, a side view, and a perspective view. The top view shows a rectangular body with six pins. Pins 1, 2, and 3 are on the bottom, and pins 4, 5, and 6 are on the top. Dimensions include: overall width 2.9±0.2, pin pitch 1.9±0.2, pin width 0.4±0.1, and body width 1.6±0.2. The side view shows the package height 2.8±0.3, pin height 1.1±0.2, and pin thickness 0.8±0.1. The perspective view shows the package from an angle.					