

DC/DC converter


0 to 13V/300mA output type

BP5812

Absolute Maximum Ratings

Parameter	Symbol	Limits	Unit
Motor driving supply voltage	V _{MIN}	20	V
CTL input voltage	V _{CTL}	-0.3 to V _{MIN}	V
Maximum output current	I _o	500	mA
Operating temperature range	T _{opr}	-20 to +70	°C
Storage temperature range	T _{stg}	-30 to +80	°C
Maximum surface temperature	T _{cmax}	100	°C


Dimension (Unit : mm)



Electrical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Motor driving supply voltage	V _{Min}	13.0	14.0	15.0	V	
CTL input voltage	V _{CTL}	0	-	5	V	
CTL input frequency	f _{CTL}	50	-	-	Hz	
Output voltage channel1,2	Vo1,2	12.5	13	13.5	V	V _{Min} =14V, V _{CTL} =5V
		12	12.6	13.5	V	V _{Min} =13V, V _{CTL} =5V
		5.5	6.5	7.5	V	V _{Min} =14V, V _{CTL} =2.5V
Output current channel1,2	I _{o1,2}	-	-	300	mA	V _{Min} =14V, V _{CTL} =5V
Output ripple voltage1,2	V _P	-	0.10	0.15	Vp-p	V _{Min} =14V, V _{CTL} =5V
Power conversion efficiency	η	84	92	-	%	V _{Min} =14V, V _{CTL} =5V


Derating Curve



- Derating curve shown above is V_{CTL}=5V(duty100%). When V_{CTL} voltage is reduced, output voltage should be reduced at a rate of I_o > (V_{CTL}=5duty).
- ex)Continuous operation at T_a=40°C : I_{o2}=150mA when V_{CTL_duty}=50%.

Application circuit

- Pulse signal is converted with DC and can be operated from micro-controller by connecting smoothing capacitor to pin4 and pin8. Changing pulse duty enables to change output voltage and control rotation of the motor.

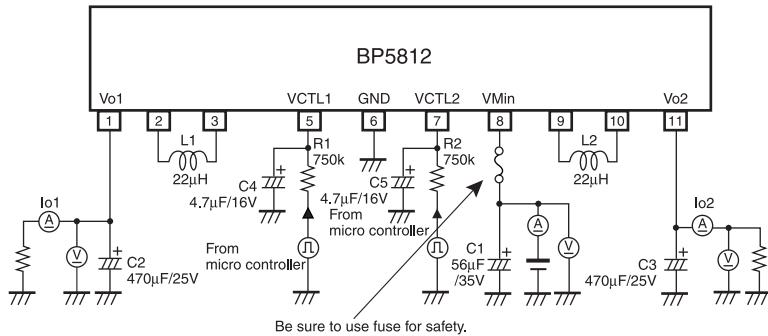

Be sure to use fuse for safety.


External components setting

- C1: Capacitor for input voltage smoothing 56μF/35V Low impedance for power supply Recommendable : ZL series/Rubycon
- C2,C3: Capacitor for output voltage smoothing 470μF/25V Low impedance for power supply Recommendable : ZL series/Rubycon
- C4,C5: Vctl smoothing capacitor 4.7μF/16V Normal products Recommendable : YXA series/Rubycon
- L1,L2: Coil for switching regulator 22μH Rated current 1.2A or higher Recommendable : RCH-114 series/Sumida
- R1,R2: Vctl divider resistor 750kHz±1% 63mW or higher Recommendable : MCR03 series/ROHM

Terminal function

Pin No.	Terminal	Terminal function
1	Vo1	Power supply output pin for driving motor (CH1 side). Please connect a capacitor. (470μF/25V ZL series/Rubycon recommended)
2,3	L1	Choke coil connection pin (CH1 side).
4	Vctl1	Output pin variable pin (CH1 side) DC voltage of 0 to 5V is inputted by external resistor. Output voltage value can be changed by changing DC voltage to linear. It also can be controlled with pulse Duty of 0V/5V by connecting external capacitor.
5	VMin	Power supply input pin for driving motor(CH1 side). Please connect a capacitor to each pin. (56μF/35V ZL series/Rubycon recommended)
6	GND	GND pin.
8	Vctl2	Output pin variable pin (CH2 side) DC voltage of 0 to 5V is inputted by external resistor. Output voltage value can be changed by changing DC voltage to linear. It also can be controlled with pulse Duty of 0V/5V by connecting external capacitor.
9,10	L2	Choke coil connection pin (CH2 side).
11	Vo2	Power supply output pin for driving motor (CH2 side). Please connect a capacitor. (470μF/25V ZL series/Rubycon recommended)

Output voltage control characteristic



Vo-V _{CTL} characteristics		
Output voltage V _o	Control voltage V _{CTL} [V]	Control duty V _{CTL} [%]
0	0	0
6.5	2.6	52.0
7	2.78	55.6
8	3.15	63.0
9	3.52	70.4
10	3.89	77.8
11	4.26	85.2
12	4.63	92.6
13	5.00	100.0

Precautions on Use of ROHM Power Module

Safety Precautions

- 1) The products are designed and produced for application in ordinary electronic equipment (AV equipment, OA equipment, telecommunication equipment, home appliances, amusement equipment etc.).
If the products are to be used in devices requiring extremely high reliability (medical equipment, transport equipment, aircraft/spacecraft, nuclear power controllers, fuel controllers, car equipment including car accessories, safety devices, etc.) and whose malfunction or operational error may endanger human life and sufficient fail-safe measures, please consult with the Company's sales staff in advance. If product malfunctions may result in serious damage, including that to human life, sufficient fail-safe measures must be taken, including the following:
 - [a] Installation of protection circuits or other protective devices to improve system safety
 - [b] Installation of redundant circuits in the case of single-circuit failure
- 2) The products are designed for use in a standard environment and not in any special environments. Application of the products in a special environment can deteriorate product performance. Accordingly, verification and confirmation of product performance, prior to use, is recommended if used under the following conditions:
 - [a] Use in various types of liquid, including water, oils, chemicals, and organic solvents
 - [b] Use outdoors where the products are exposed to direct sunlight, or in dusty places
 - [c] Use in places where the products are exposed to sea winds or corrosive gases, including Cl₂, H₂S, NH₃, SO₂, and NO₂
 - [d] Use in places where the products are exposed to static electricity or electromagnetic waves
 - [e] Use in proximity to heat-producing components, plastic cords, or other flammable items
 - [f] Use involving sealing or coating the products with resin or other coating materials
 - [g] Use involving unclean solder or use of water or water-soluble cleaning agents for cleaning after soldering
 - [h] Use of the products in places subject to dew condensation
- 3) The products are not radiation resistant.
- 4) The Company is not responsible for any problems resulting from use of the products under conditions not recommended herein.
- 5) The Company should be notified of any product safety issues. Moreover, product safety issues should be periodically monitored by the customer.

Precautions Regarding Application Example and External Circuits

- 1) If change is made to the constant of an external circuit, allow a sufficient margin due to variations of the characteristics of the products and external components, including transient characteristics, as well as static characteristics. Please be informed that the Company has not conducted investigations on whether or not particular changes in the application examples or external circuits would result in the infringement of patent rights of a third party.
- 2) The application examples, their constants, and other types of information contained herein are applicable only when the products are used in accordance with standard methods.
Therefore, if mass production is intended, sufficient consideration to external conditions must be made.

Prohibitions Regarding Industrial Property

- 1) These Specifications contain information related to the Company's industrial property. Any use of them other than pertaining to the usage of appropriate products is not permitted. Duplication of these Specifications and its disclosure to a third party without the Company's permission is prohibited.
- 2) Information and data on products, including application examples, contained in these specifications are simply for reference; the Company does not guarantee any industrial property rights, intellectual property rights, or any other rights of a third party regarding this information or data. Accordingly, the Company does not bear any responsibility for:
 - [a] infringement of the intellectual property rights of a third party
 - [b] any problems incurred by the use of the products listed herein.
- 3) The Company prohibits the purchaser of its products to exercise or use the intellectual property rights, industrial property rights, or any other rights that either belong to or are controlled by the Company, other than the right to use, sell, or dispose of the products.

Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.