



Features


- High breakdown voltage
- Excellent hFE linearity



Marking and pin assignment



SOT-89-3L top view



Schematic diagram



Halogen-Free

Maximum Ratings (Ta=25°C unless otherwise noted)

Symbol	Parameter	Value	Unit
V_{CBO}	Collector-Base Voltage	-400	V
V_{CEO}	Collector-Emitter Voltage	-400	V
V_{EBO}	Emitter-Base Voltage	-5	V
I_C	Collector Current	-200	mA
P_C	Collector Power Dissipation	500	mW
$R_{\theta JA}$	Thermal Resistance From Junction To Ambient	250	°C/W
T_J, T_{stg}	Operation Junction and Storage Temperature Range	-55~+150	°C

Ordering Information (Example)



Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantitv(pcs)	Outer Carton Quantitv(pcs)	Delivery Mode
2SA1740	SOT-89-3L	AK	1,000	10,000	40,000	7" reel







Electrical Characteristics (Ta=25°C unless otherwise specified)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C = -10\mu A, I_E = 0$	-400	--	--	V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C = -1mA, I_B = 0$	-400	--	--	V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E = -10\mu A, I_C = 0$	-5	--	--	V
I_{CBO}	Collector cut-off current	$V_{CB} = -300V, I_E = 0$	--	--	-100	nA
I_{EBO}	Emitter cut-off current	$V_{EB} = -4V, I_C = 0$	--	--	-100	nA
h_{FE}	DC current gain	$V_{CE} = -10V, I_C = -50mA$	60	--	200	
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C = -50mA, I_B = -5mA$	--	--	-0.6	V
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C = -50mA, I_B = -5mA$	--	--	-1	V
C_{ob}	Collector output capacitance	$V_{CB} = -30V, I_E = 0, f = 1MHz$	--	5	--	pF
t_{on}	Turn-ON Time	$V_{CC} = -150V, I_C = -50mA, I_{B1} = -I_{B2} = -5mA$	--	0.25	--	μs
t_{off}	Turn-OFF Time		--	5	--	μs
F_t	Transition frequency	$V_{CE} = -30V, I_C = -10mA$	--	70	--	MHz


Classification of h_{FE}

Rank	D	E
Range	60-120	100-200

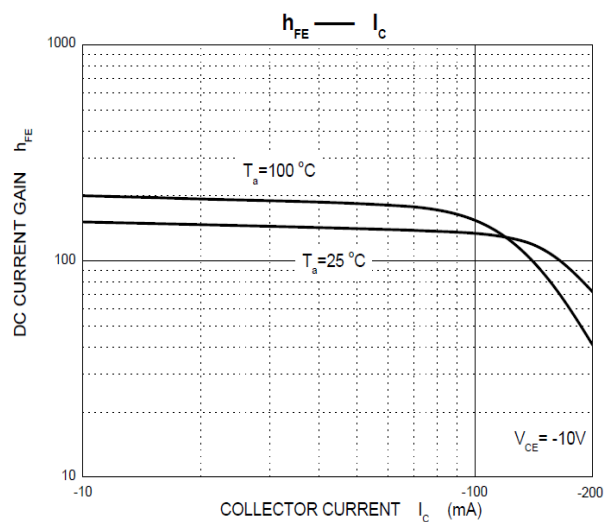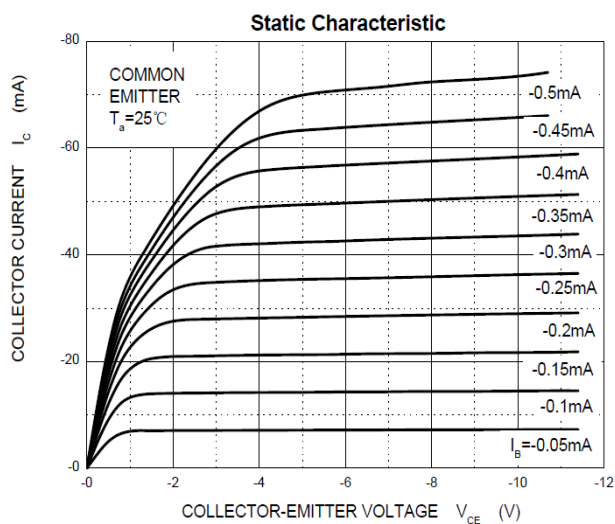Typical Characteristics

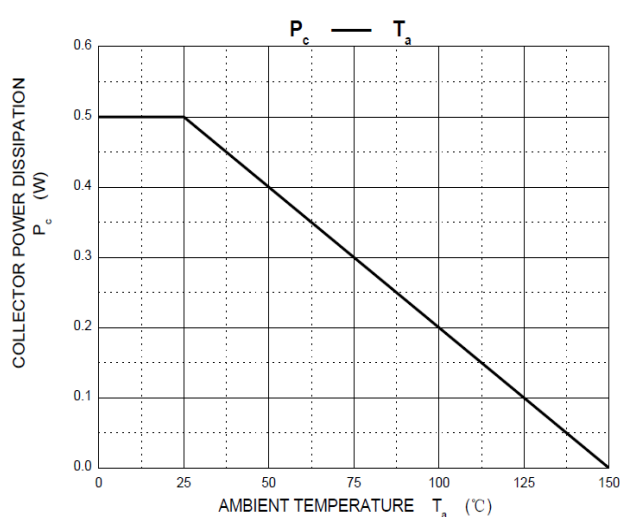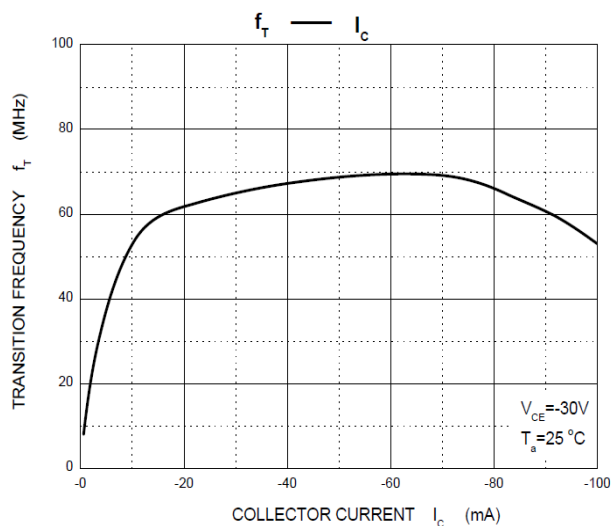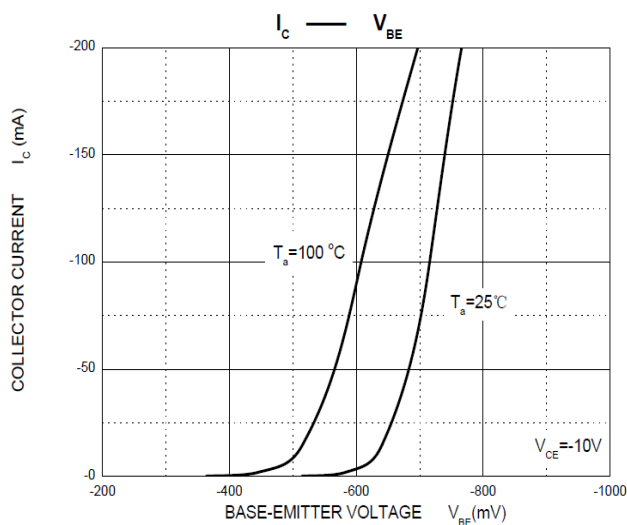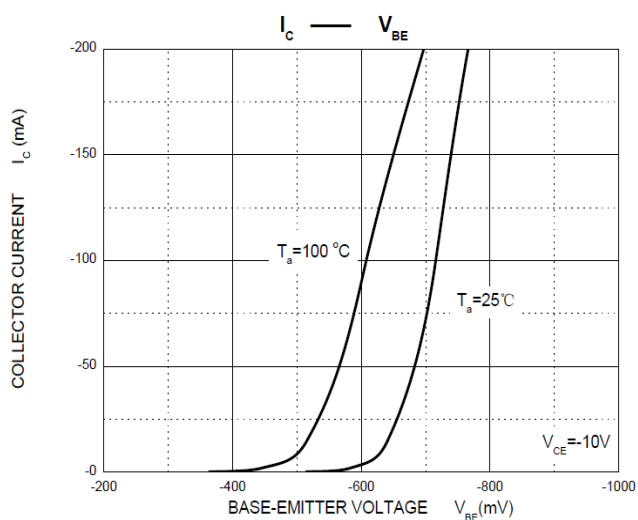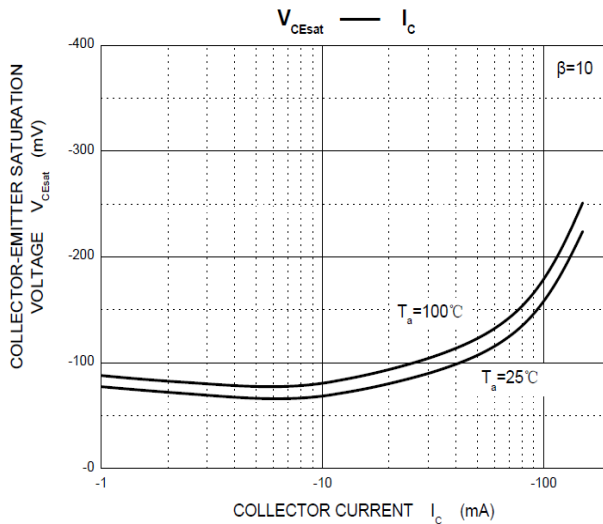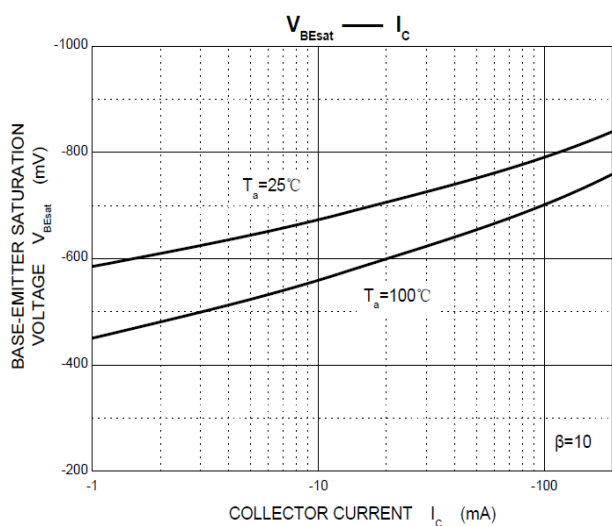


SOT-89-3L Package information

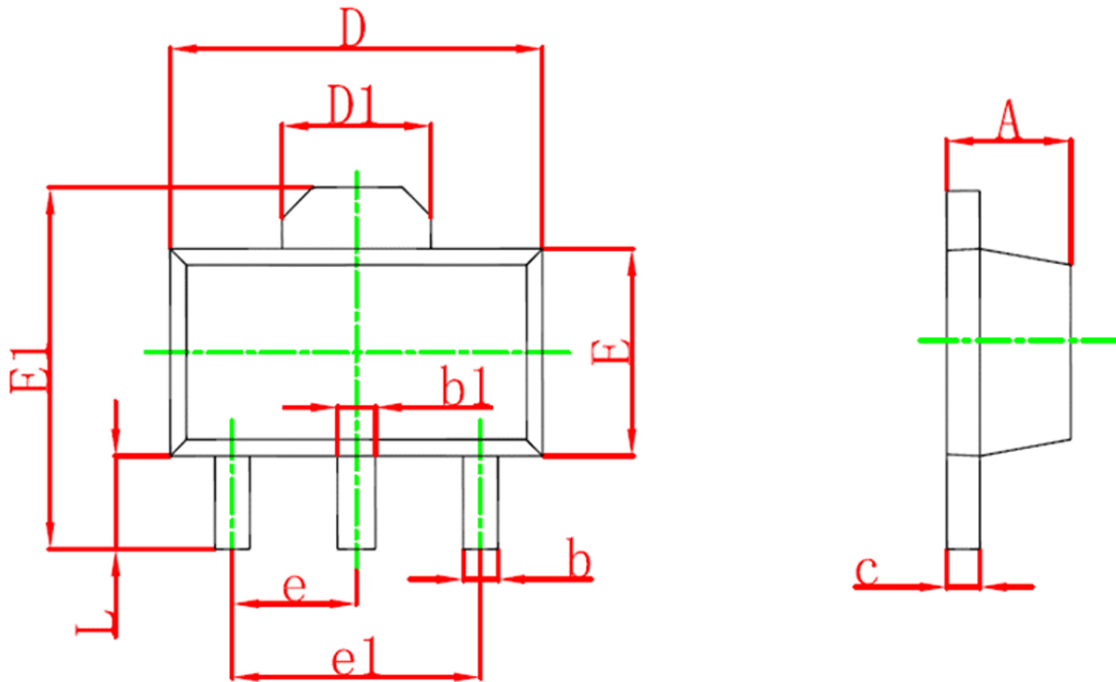

Symbol	Dimensions in Millimeters(mm)		Dimensions in Inches	
	Min	Max	Min	Max
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF		0.061 REF	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP		0.060 TYP	
e1	3.000 TYP		0.118 TYP	
L	0.900	1.200	0.035	0.047