






VDSL Filter Modules

For Infineon VDSL 10Base-S Chipsets



-  Matched to Infineon PEF22822/22811 VDSL 10Base-S chipsets
-  Single Port Filter modules for VDSL NT modem applications
-  Multi-function model includes HPF Splitter, Hybrid Transformer, TX and RX Separation Filters and Common Mode Chokes
-  Designed to meet IEC950 supplementary insulation requirements
-  Most compact footprint module available in the industry.

Electrical Specifications @ 25°C - Operating Temperature -40°C to +85°C

Part Number	TX to Line Specifications			Line to RX Specifications		
	Insertion Loss (dB MAX) (4.1 MHz - 7.9 MHz)	Stopband Frequency	Attenuation (MIN) (dB)	Insertion Loss (dB MAX) (4.1 MHz - 7.9 MHz)	Stopband Frequency	Attenuation (dB MIN)
BX4039	1	10 kHz - 100 kHz	65	1.5	10 kHz - 300 kHz	30
		100 kHz - 300 kHz	20		4.1 kHz - 5.5 kHz	15
		17 kHz - 40 kHz	15		5.5 kHz - 40 kHz	30
BX4040	1	10 kHz - 100 kHz	65	1.5	10 kHz - 500 kHz	30
		100 kHz - 500 kHz	20		4.1 MHz - 5.5 MHz	15
		17 kHz - 40 kHz	15		5.5 MHz - 40 MHz	30

Additional Specifications



Part Number	Line Return Loss (dB MIN) 4.1 MHz - 7.9 MHz	Transhybrid Loss (dB MIN)		Isolation Voltage (Vrms)	Line Impedance (Ω)	TX Impedance (Ω)	RX Impedance (Ω)
		1 MHz - 3.4 MHz	4.1 MHz - 7.9 MHz				
BX4037	12	16	45	1500	120	40	270
BX4038	12	16	45	1500	120	40	270

Notes: BX4039 is for ISDN/POTS applications. BX4040 is for Smartphone applications.

Mechanical

Schematic

BX4039 / BX4040

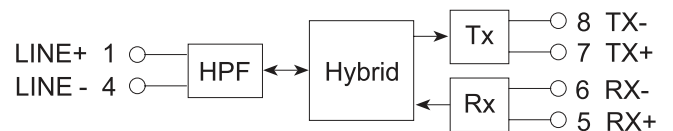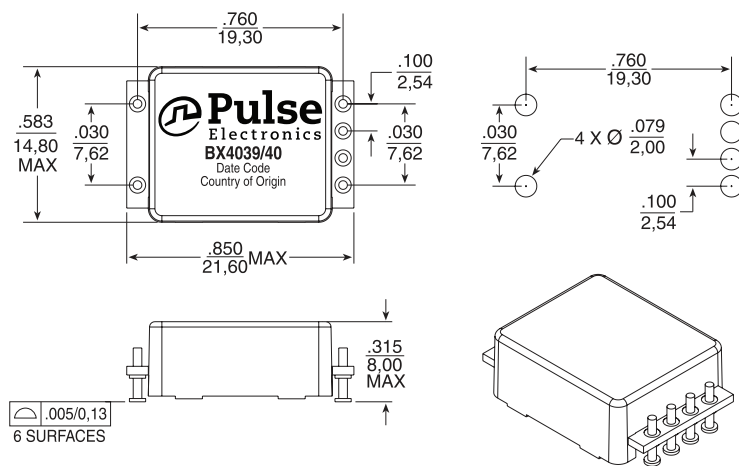

Weight2.075 grams

Tape & Reel650/reel

Tube30/tube

Dimensions: $\frac{\text{Inches}}{\text{mm}}$

Unless otherwise specified,
all tolerances are $\pm \frac{.010}{0,25}$

USA 858 674 8100

Germany 49 7032 7806 0

Singapore 65 6287 8998

Shanghai 86 21 62787060

China 86 755 33966678


Taiwan 886 3 4356768

VDSL Filter Modules


For Infineon VDSL 10Base-S Chipsets

Typical Performance @ 25°C BX4039 & BX4040


RX Insertion Loss

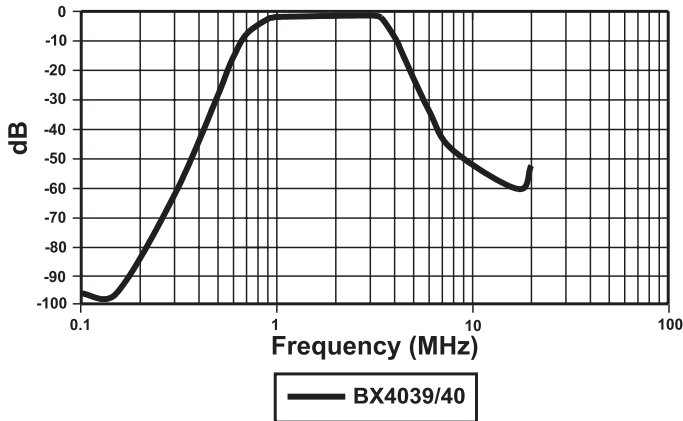


TX Insertion Loss

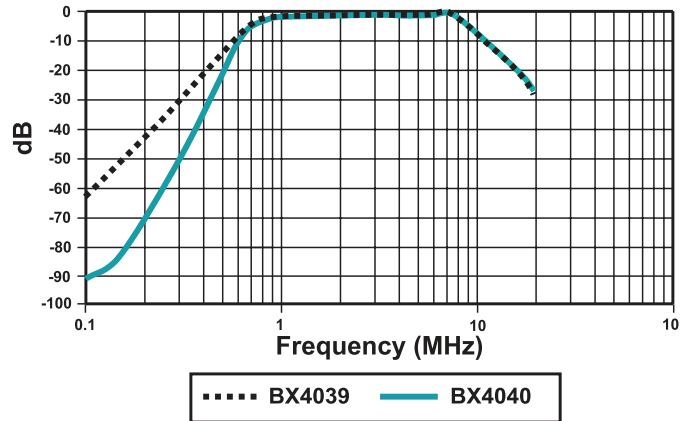

Transhybrid Loss

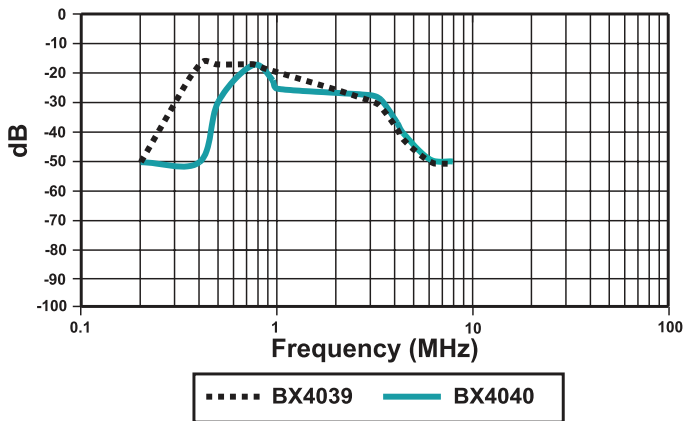

Return Loss

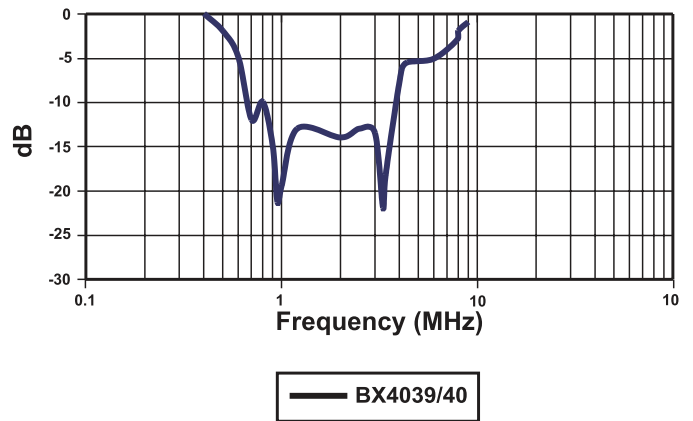

For More Information

Pulse Worldwide Headquarters
12220 World Trade Drive
San Diego, CA
92128
U.S.A.

Tel: 858 674 8100
Fax: 858 674 8262

Pulse Europe
Einsteinstrasse 1
D-71083 Herrenberg
Germany

Tel: 49 7032 78060
Fax: 49 7032 7806 135

Pulse China Headquarters
B402, Shenzhen Academy of
Aerospace Technol-
ogy Bldg.
10th Kejian Road
High-Tech Zone
Nanshan District
Shenzhen, PR China
518057
Tel: 86 755 33966678
Fax: 86 755 33966700

Pulse North China
Room 2704/2705
Super Ocean Finance
Ctr.
2067 Yan An Road
West
Shanghai 200336
China
Tel: 86 21 62787060
Fax: 86 2162786973

Pulse South Asia
135 Joo Seng Road
#03-02
PM Industrial Bldg.
Singapore 368363
Tel: 65 6287 8998
Fax: 65 6287 8998

Pulse North Asia
3F, No. 198
Zhongyuan Road
Zhongli City
Taoyuan County 320
Taiwan R. O. C.
Tel: 886 3 4356768
Fax: 886 3 4356823 (Pulse)
Fax: 886 3 4356820 (FRE)

Performance warranty of products offered on this data sheet is limited to the parameters specified. Data is subject to change without notice. Other brand and product names mentioned herein may be trademarks or registered trademarks of their respective owners. © Copyright, 2012. Pulse Electronics, Inc. All rights reserved.