RENESAS

SILICON POWER TRANSISTOR
2SC3518-Z

NPN SILICON EPITAXIAL TRANSISTOR

DESCRIPTION

The 2SC3518-Z is designed for Audio Frequency Amplifier and Switching, especially in Hybrid Integrated Circuits.

FEATURES

- High DC Current Gain h_{FE} = 100 to 400
- Low $V_{CE(sat)}$: $V_{CE(sat)}$ = 0.09 V TYP.
- Complement to 2SA1385-Z

ABSOLUTE MAXIMUM RATINGS (T_A = 25°C)

Collector to Base Voltage	V_{CBO}	60	V
Collector to Emitter Voltage	V_{CEO}	60	V
Emitter to Base Voltage	V_{EBO}	7	V
Collector Current (DC)	$I_{C(DC)}$	5	A
Collector Current (pulse) Note 1	$I_{C(pulse)}$	7	A
Total Power Dissipation (T_A = 25°C) Note 2	P_T	2.0	W
Junction Temperature	T_j	150	°C
Storage Temperature	T_{stg}	−55 to +150	°C

Notes 1. PW ≤ 10 ms, Duty Cycle ≤ 50%

2. When mounted on ceramic substrate of 7.5 cm^2 × 0.7 mm

<R> **PACKAGE DRAWING (Unit: mm)**

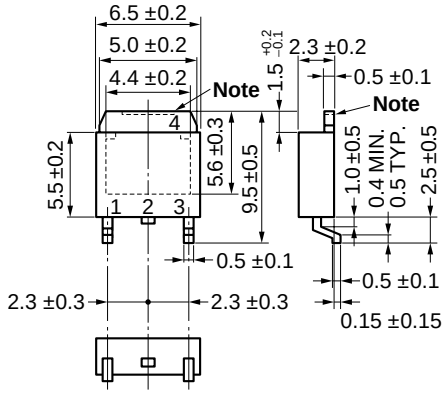

TO-252 (MP-3Z)

1. Base
2. Collector
3. Emitter
4. Collector Fin

Note The depth of notch at the top of the fin is from 0 to 0.2 mm.

Document No. D18263EJ3V0DS00 (3rd edition)
(Previous No. TC-1662A)
Date Published July 2006 NS CP(K)
Printed in Japan

The mark <R> shows major revised points.
The revised points can be easily searched by copying an "<R>" in the PDF file and specifying it in the "Find what:" field.

ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	TEST CONDITIONS
Collector Cutoff Current	I_{CBO}			10	μA	V_{CB} = 50 V, I_E = 0
Emitter Cutoff Current	I_{EBO}			10	μA	V_{EB} = 7.0 V, I_C = 0
DC Current Gain	h_{FE1}*	100		400		V_{CE} = 1.0 V, I_C = 2.0 A
DC Current Gain	h_{FE2}*	50				V_{CE} = 1.0 V, I_C = 5.0 A
Collector Saturation Voltage	$V_{CE(sat)}$*			0.3	V	I_C = 2.0 A, I_B = 0.2 A
Base Saturation Voltage	$V_{BE(sat)}$*			1.2	V	I_C = 2.0 A, I_B = 0.2 A
Gain Bandwidth Product	f_T*		120		MHz	V_{CE} = 10 V, I_E = −500 mA
Turn-on Time	t_{on}		0.07	1.0	μs	I_C = 2.0 A, V_{CC} ≒ 10 V
Storage Time	t_{stg}		0.8	2.5	μs	R_L = 5.0 Ω
Fall Time	t_f		0.12	1.0	μs	I_{B1} = −I_{B2} = 0.2 A

* Pulsed: PW ≦ 350 μs, Duty Cycle ≦ 2 %

h_{FE} Classification

MARKING	M	L	K
h_{FE1}	100 to 200	160 to 320	200 to 400

TYPICAL CHARACTERISTICS (T_a = 25 °C)

TOTAL POWER DISSIPATION vs. AMBIENT TEMPERATURE

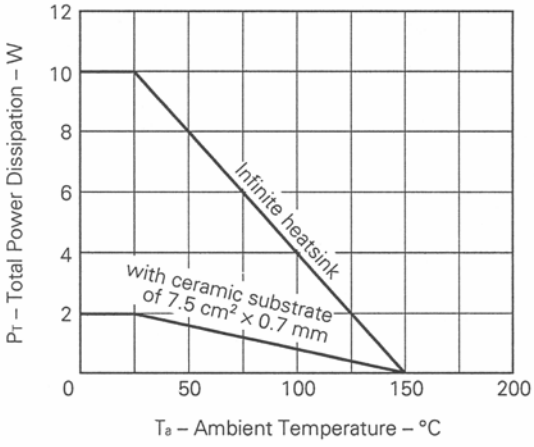

SAFE OPERATING AREA

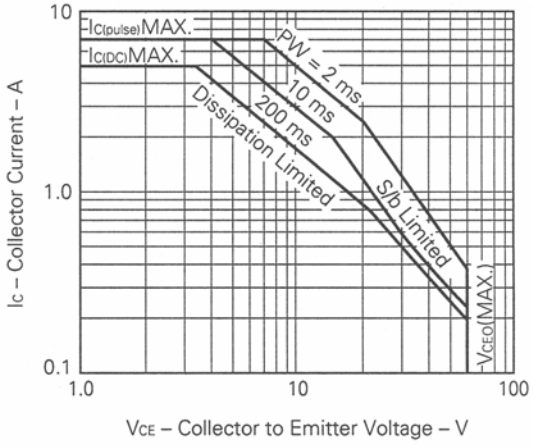

DERATING CURVE OF SAFE OPERATING AREA

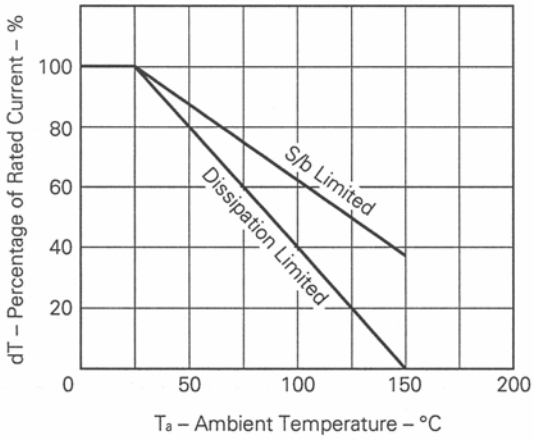

REVERSE BIAS SAFE OPERATING AREA

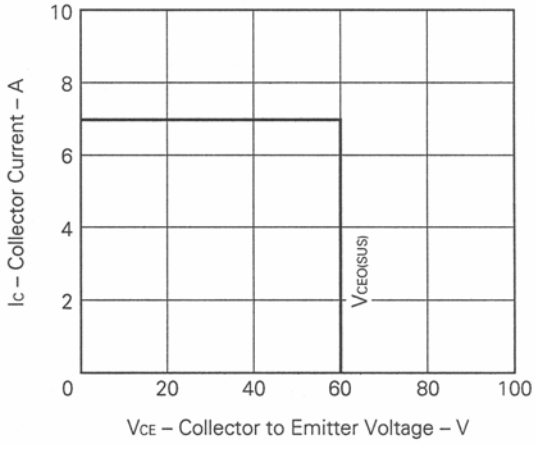

COLLECTOR CURRENT vs.
COLLECTOR TO EMITTER VOLTAGE

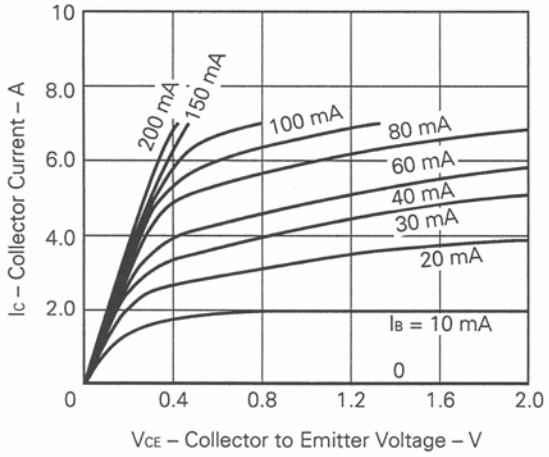

COLLECTOR CURRENT vs.
COLLECTOR TO EMITTER VOLTAGE

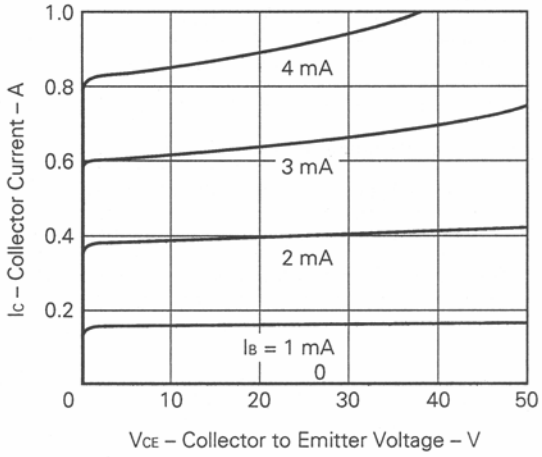

DC CURRENT GAIN vs.
COLLECTOR CURRENT

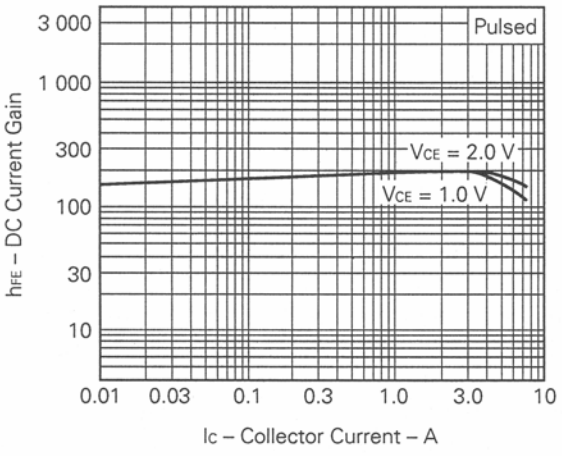

COLLECTOR AND BASE SATURATION
VOLTAGE vs. COLLECTOR CURRENT

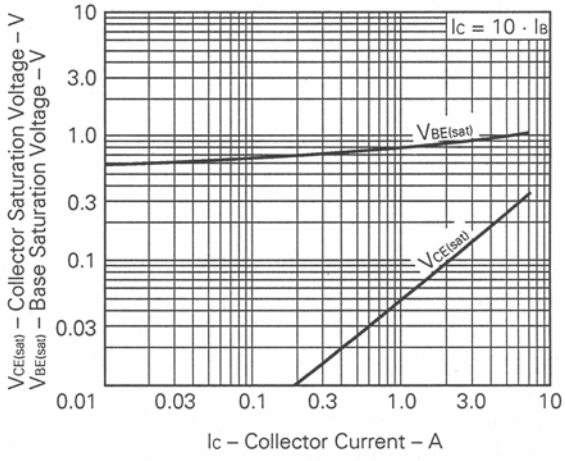

SWITCHING TIME vs.
COLLECTOR CURRENT

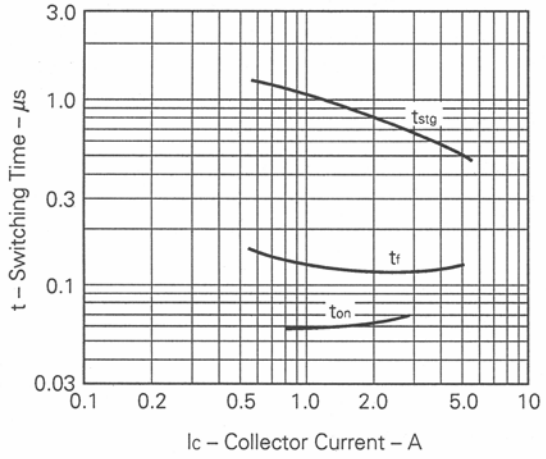

GAIN BANDWIDTH PRODUCT vs.
COLLECTOR CURRENT

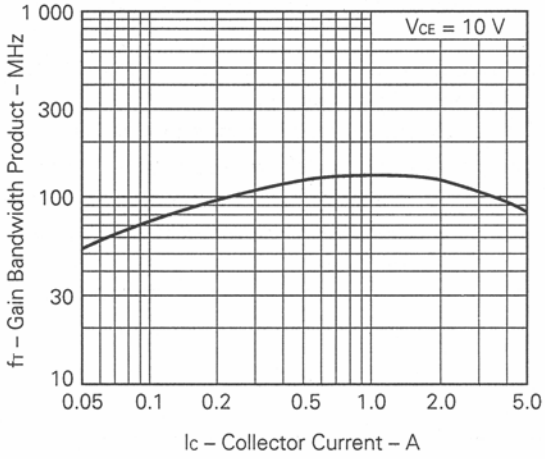

- **The information in this document is current as of July, 2006. The information is subject to change without notice. For actual design-in, refer to the latest publications of NEC Electronics data sheets or data books, etc., for the most up-to-date specifications of NEC Electronics products. Not all products and/or types are available in every country. Please check with an NEC Electronics sales representative for availability and additional information.**
- No part of this document may be copied or reproduced in any form or by any means without the prior written consent of NEC Electronics. NEC Electronics assumes no responsibility for any errors that may appear in this document.
- NEC Electronics does not assume any liability for infringement of patents, copyrights or other intellectual property rights of third parties by or arising from the use of NEC Electronics products listed in this document or any other liability arising from the use of such products. No license, express, implied or otherwise, is granted under any patents, copyrights or other intellectual property rights of NEC Electronics or others.
- Descriptions of circuits, software and other related information in this document are provided for illustrative purposes in semiconductor product operation and application examples. The incorporation of these circuits, software and information in the design of a customer's equipment shall be done under the full responsibility of the customer. NEC Electronics assumes no responsibility for any losses incurred by customers or third parties arising from the use of these circuits, software and information.
- While NEC Electronics endeavors to enhance the quality, reliability and safety of NEC Electronics products, customers agree and acknowledge that the possibility of defects thereof cannot be eliminated entirely. To minimize risks of damage to property or injury (including death) to persons arising from defects in NEC Electronics products, customers must incorporate sufficient safety measures in their design, such as redundancy, fire-containment and anti-failure features.
- NEC Electronics products are classified into the following three quality grades: "Standard", "Special" and "Specific".

  The "Specific" quality grade applies only to NEC Electronics products developed based on a customer-designated "quality assurance program" for a specific application. The recommended applications of an NEC Electronics product depend on its quality grade, as indicated below. Customers must check the quality grade of each NEC Electronics product before using it in a particular application.

  "Standard": Computers, office equipment, communications equipment, test and measurement equipment, audio and visual equipment, home electronic appliances, machine tools, personal electronic equipment and industrial robots.

  "Special": Transportation equipment (automobiles, trains, ships, etc.), traffic control systems, anti-disaster systems, anti-crime systems, safety equipment and medical equipment (not specifically designed for life support).

  "Specific": Aircraft, aerospace equipment, submersible repeaters, nuclear reactor control systems, life support systems and medical equipment for life support, etc.

The quality grade of NEC Electronics products is "Standard" unless otherwise expressly specified in NEC Electronics data sheets or data books, etc. If customers wish to use NEC Electronics products in applications not intended by NEC Electronics, they must contact an NEC Electronics sales representative in advance to determine NEC Electronics' willingness to support a given application.

(Note)

(1) "NEC Electronics" as used in this statement means NEC Electronics Corporation and also includes its majority-owned subsidiaries.

(2) "NEC Electronics products" means any product developed or manufactured by or for NEC Electronics (as defined above).

M8E 02. 11-1