


## 2SC3521

SILICON NPN EPITAXIAL PLANAR

HIGH FREQUENCY AMPLIFIER  
SWITCH

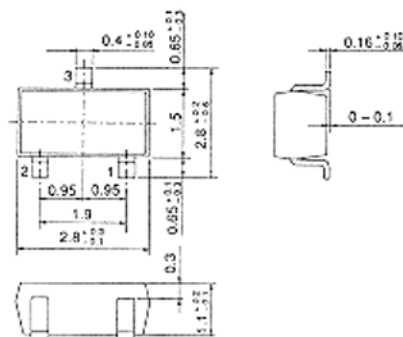


(MPAK)

1. Emitter
  2. Base
  3. Collector
- (Dimensions in mm)

### ■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

Item	Symbol	2SC3521	Unit
Collector to base voltage	V <sub>CB0</sub>	40	V
Collector to emitter voltage	V <sub>CE0</sub>	15	V
Emitter to base voltage	V <sub>EB0</sub>	5	V
Collector current	I <sub>C</sub>	100	mA
Collector power dissipation	P <sub>C</sub>	100	mW
Junction temperature	T <sub>J</sub>	150	°C
Storage temperature	T <sub>stg</sub>	-55 to +150	°C

### MAXIMUM COLLECTOR DISSIPATION CURVE

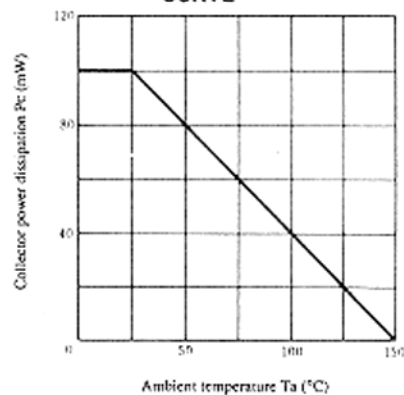

### ■ ELECTRICAL CHARACTERISTICS (Ta=25°C)


Item	Symbol	Test Condition	min.	typ.	max.	Unit
Collector to base breakdown voltage	V <sub>(BR)CBO</sub>	I <sub>C</sub> = 10μA, I <sub>E</sub> = 0	40	—	—	V
Collector to emitter breakdown voltage	V <sub>(BR)CEO</sub>	I <sub>C</sub> = 10mA, R <sub>BE</sub> = ∞	15	—	—	V
Emitter to base breakdown voltage	V <sub>(BR)EBO</sub>	I <sub>E</sub> = 10μA, I <sub>C</sub> = 0	5	—	—	V
Collector cutoff current	I <sub>CBO</sub>	V <sub>CB</sub> = 20V, I <sub>E</sub> = 0	—	—	0.25	μA
Emitter cutoff current	I <sub>EBO</sub>	V <sub>EB</sub> = 4V, I <sub>C</sub> = 0	—	—	1.0	μA
DC current transfer ratio	h <sub>FE</sub> *	V <sub>CE</sub> = 0.5V, I <sub>C</sub> = 1mA	45	—	160	
Collector to emitter saturation voltage	V <sub>CE(sat)</sub>	I <sub>C</sub> = 10mA, I <sub>B</sub> = 1mA	—	—	0.3	V
Base to emitter saturation voltage	V <sub>BE(sat)</sub>	I <sub>C</sub> = 10mA, I <sub>B</sub> = 1mA	—	—	0.8	V

\* The 2SC3521 is grouped by h<sub>FE</sub> as follows.


Grade	B	C
Mark	IKB	IKC
h <sub>FE</sub>	45 to 90	80 to 160

## 2SC3521


**COLLECTOR CUTOFF CURRENT VS. COLLECTOR TO BASE VOLTAGE**

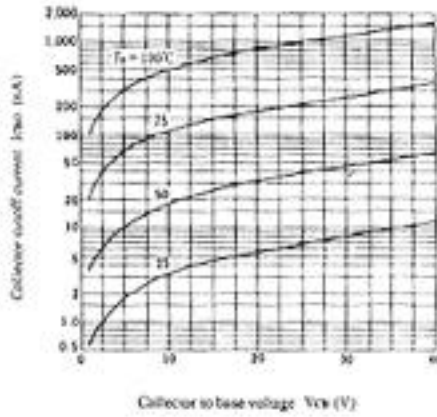


**TYPICAL OUTPUT CHARACTERISTICS**

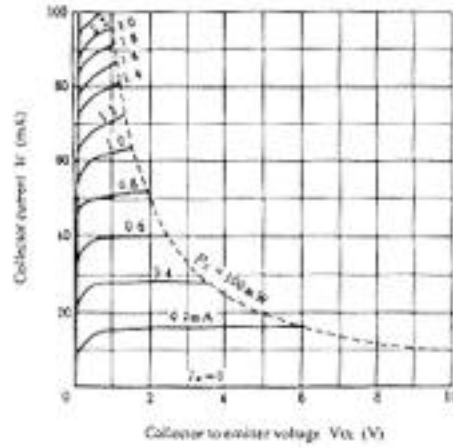


**DC CURRENT TRANSFER RATIO VS. COLLECTOR CURRENT**

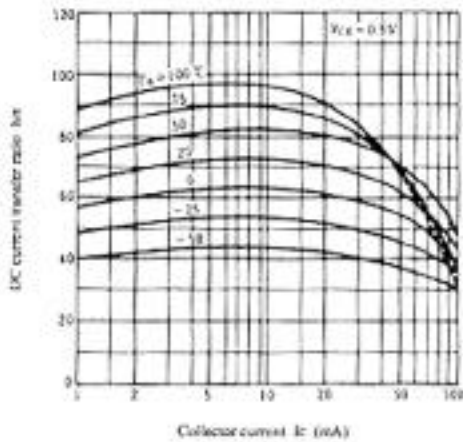


**COLLECTOR TO EMITTER SATURATION VOLTAGE VS. BASE CURRENT**

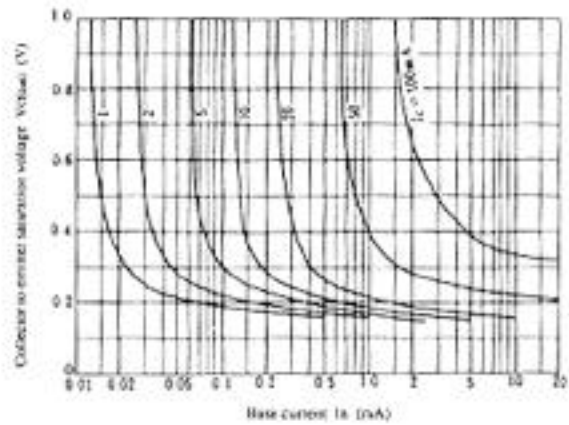


**BASE TO EMITTER SATURATION VOLTAGE VS. COLLECTOR CURRENT**

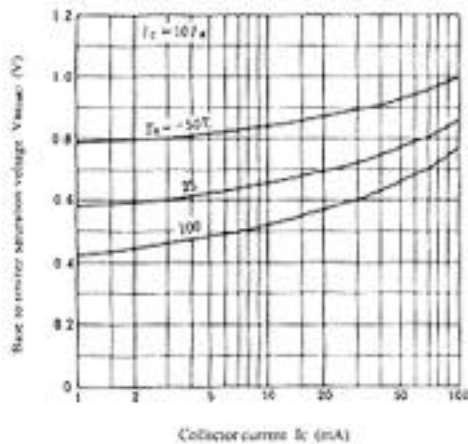

**COLLECTOR TO EMITTER SATURATION VOLTAGE VS. COLLECTOR CURRENT**

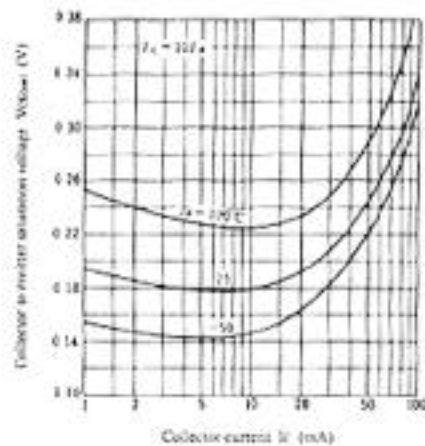

EMITTER INPUT CAPACITANCE VS.  
EMITTER TO BASE VOLTAGE

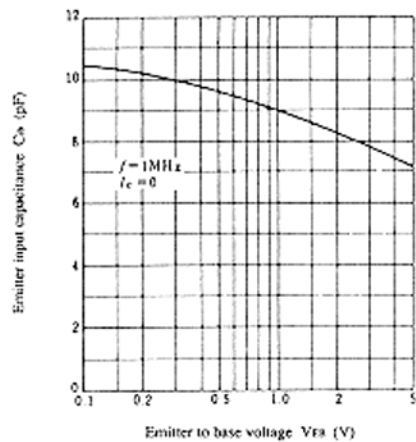

COLLECTOR OUTPUT CAPACITANCE VS.  
COLLECTOR TO BASE VOLTAGE

