

CD957B thru CD986B




Zener Diode Chip Series

Rev. V5

Features

- 0.5 W Capability with Proper Heat Sinking
- Electrically Equivalent to 1N957B - 1N986B
- All Junction Protected with Silicon Dioxide

Die



Description

These 0.5 W zener diodes are electrically equivalent to the 1N957B - 1N986B series diodes. They are compatible with all wire bonding and die attach techniques with the exception of solder reflow.

These diodes are available in JANHC and JANKC per MIL-PRF-19500/117.

Electrical Specifications: $T_A = +25^\circ\text{C}$ (unless otherwise specified)

Part #	Nominal	Zener	Maximum			Maximum		Maximum
	Zener Voltage	Test Current	Zener Impedance ²			Reverse Leakage Current		Zener Current
	$V_Z @ I_{ZT}^1$	I_{ZT}	$Z_{ZT} @ I_{ZT}$	$Z_{ZK} @ I_{ZK}$		$I_R @ V_R$		I_{ZM}
	V	mA	Ω	Ω	mA	μA	V	mA
CD957B	6.8	18.5	4.5	700	1.0	5.0	5.2	55
CD958B	7.5	16.5	5.5	700	0.5	5.0	5.7	50
CD959B	8.2	15.0	3.5	700	0.5	5.0	6.2	45
CD960B	9.1	14.0	7.5	700	0.5	5.0	6.9	41
CD961B	10	12.5	8.5	700	0.25	2.0	7.6	38
CD962B	11	11.5	9.5	700	0.25	1.0	8.4	32
CD963B	12	10.5	11.5	700	0.25	1.0	9.1	31
CD964B	13	9.5	13	700	0.25	0.5	9.9	28
CD965B	15	8.5	16	700	0.25	0.5	11	25
CD966B	16	7.8	17	700	0.25	0.5	12	24
CD967B	18	7.0	21	750	0.25	0.5	14	20
CD968B	20	6.2	25	750	0.25	0.5	15	18
CD969B	22	5.6	29	750	0.25	0.5	17	16
CD970B	24	5.2	33	750	0.25	0.5	18	15
CD971B	27	4.6	41	750	0.25	0.5	21	13
CD972B	30	4.2	49	1000	0.25	0.5	23	12
CD973B	33	3.8	58	1000	0.25	0.5	25	11
CD974B	36	3.4	70	1000	0.25	0.5	27	10
CD975B	39	3.2	90	1000	0.25	0.5	30	9.5
CD976B	43	3.0	93	1500	0.25	0.5	33	8.8
CD977B	47	2.7	105	1500	0.25	0.5	36	7.9
CD978B	51	2.5	125	1500	0.25	0.5	39	7.4
CD979B	56	2.2	150	2000	0.25	0.5	43	6.8
CD980B	62	2.0	185	2000	0.25	0.5	47	6.0
CD981B	68	1.8	230	2000	0.25	0.5	52	5.5
CD982B	75	1.7	270	2000	0.25	0.5	56	5.0
CD983B	82	1.5	330	3000	0.25	0.5	62	4.6
CD984B	91	1.4	400	3000	0.25	0.5	69	4.1
CD985B	100	1.3	500	3000	0.25	0.5	76	3.7
CD986B	110	1.1	750	4000	0.25	0.5	84	3.3

1. Zener voltage range equals nominal voltage $\pm 5\%$ for "B" suffix. "A" suffix denotes $\pm 10\%$, No suffix denotes $\pm 20\%$, "C" suffix = $\pm 2\%$ and "D" suffix = $\pm 1\%$. Zener voltage is read using a pulse measurement, 10 milliseconds maximum.
2. Zener impedance is derived by superimposing on I_{ZT} at 60 HZ RMS AC current equal to 10% of I_{ZT} .

VPT Components and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice. Visit www.vptcomponents.com for additional data sheets and product information.

CD957B thru CD986B



Zener Diode Chip Series


Rev. V5

Absolute Maximum Ratings^{5,6}

Parameter	Absolute Maximum
Forward Voltage	1.5 V @ 200 mA
Operating Temperature	-65°C to +175°C
Storage Temperature	-65°C to +175°C

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- VPT Components does not recommend sustained operation near these survivability limits.

Zener Impedance vs. Operating Current

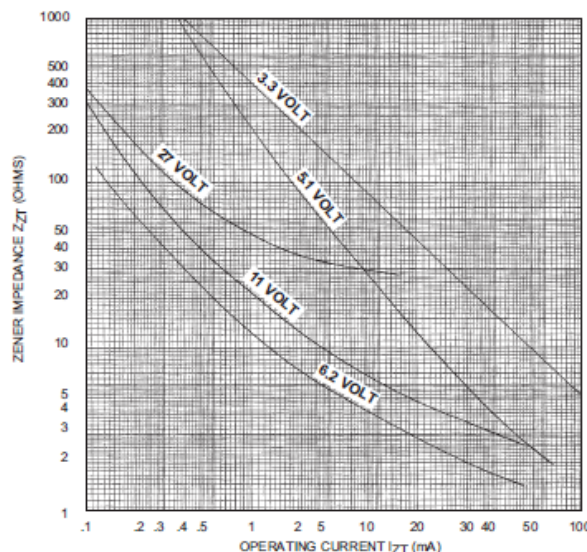

ZENER IMPEDANCE VS. OPERATING CURRENT

Die

Die dimensions:

- Top width: $.021 \pm .002$ [0.53 ±0.05]
- Left height: $.021 \pm .002$ [0.53 ±0.05]
- Right height: $.015 \pm .002$ [0.38 ±0.05]
- Bottom width: $.015 \pm .002$ [0.38 ±0.05]
- Bottom height: $.010 \pm .002$ [0.25 ±0.05]

Metallization: Top: (anode) AL
Back: (cathode) Au

AL Thickness: 25,000 Å Minimum

Gold Thickness: 4,000 Å Minimum

Chip Thickness: 10 mils

Circuit Layout Data: For Zener operation, cathode must be operated positive with respect to anode.

VPT COMPONENTS. ALL RIGHTS RESERVED.

Information in this document is provided in connection with VPT Components products. These materials are provided by VPT Components as a service to its customers and may be used for informational purposes only. Except as provided in VPT Components Terms and Conditions of Sale for such products or in any separate agreement related to this document, VPT Components assumes no liability whatsoever. VPT Components assumes no responsibility for errors or omissions in these materials. VPT Components may make changes to specifications and product descriptions at any time, without notice. VPT Components makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppels or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF VPT COMPONENTS PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. VPT COMPONENTS FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. VPT COMPONENTS SHALL NOT BE LIABLE FOR ANY SPECIAL, IN-DIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

VPT Components products are not intended for use in medical, lifesaving or life sustaining applications. VPT Components customers using or selling VPT Components products for use in such applications do so at their own risk and agree to fully indemnify VPT Components for any damages resulting from such improper use or sale.