

# SMD Schottky Barrier Diode

## CDBF0520L (Lead-free Device)

$I_o = 500 \text{ mA}$   
 $V_R = 20 \text{ Volts}$




### Features

- Low forward Voltage
- Designed for mounting on small surface.
- Extremely thin/leadless package.
- Majority carrier conduction.

### Mechanical data

- Case: SOD-323F (2512) Standard package , molded plastic.
- Terminals: Gold plated, solderable per MIL-STD-750, method 2026.
- Polarity: Indicated by cathode band.
- Mounting position: Any.
- Weight: 0.006 gram (approximately).

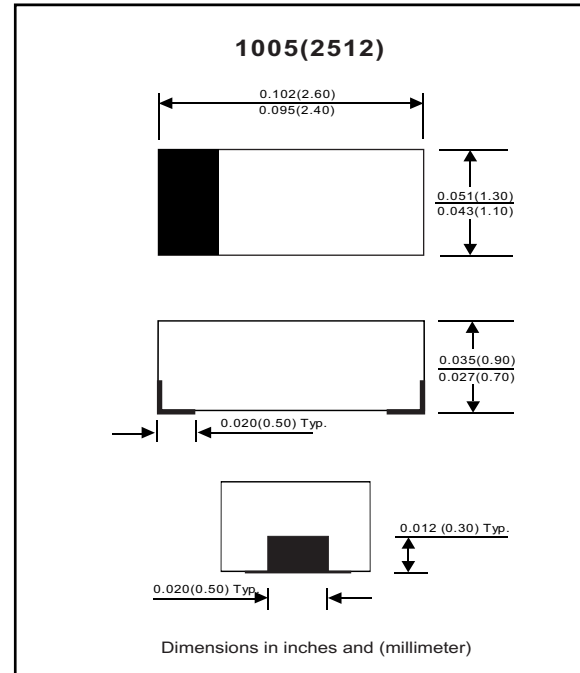

### Maximum Rating ( at $T_A = 25 \text{ C}$ unless otherwise noted )

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Repetitive peak reverse voltage		$V_{RRM}$			20	V
Reverse voltage		$V_R$			20	V
Average forward rectified current		$I_o$			0.5	A
Forward current , surge peak	8.3 ms single half sine-wave superimposed on rate load ( JEDEC method )	$I_{FSM}$			5.5	A
Storage temperature		$T_{STG}$	-40		+125	$^{\circ}\text{C}$
Junction temperature		$T_j$	-40		+125	$^{\circ}\text{C}$

### Electrical Characteristics ( at $T_A = 25^{\circ}\text{C}$ unless otherwise noted )

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Forward voltage	$I_F = 100\text{mA}$ @ $T_a = 25^{\circ}\text{C}$	$V_F$			300	mV
	$I_F = 500\text{mA}$ @ $T_a = 25^{\circ}\text{C}$	$V_F$			385	mV
	$I_F = 100\text{mA}$ @ $T_a = 100^{\circ}\text{C}$	$V_F$			220	mV
	$I_F = 500\text{mA}$ @ $T_a = 100^{\circ}\text{C}$	$V_F$			330	mV
Reverse current	$V_R = 10\text{V}$ @ $T_a = 25^{\circ}\text{C}$	$I_R$			75	$\mu\text{A}$
	$V_R = 20\text{V}$ @ $T_a = 25^{\circ}\text{C}$	$I_R$			250	$\mu\text{A}$
Capacitance between terminals	$f = 1\text{MHz}$ , and 0 VDC reverse voltage	$C_T$			170	pF
Reverse recovery time	$I_F = I_R = 10\text{mA}$ , $I_{rr} = 0.1 \times I_R$ , $R_L = 100 \text{ ohm}$	$T_{rr}$		22		ns

## RATING AND CHARACTERISTIC CURVES (CDBF0520L)

Fig. 1 - Forward characteristics

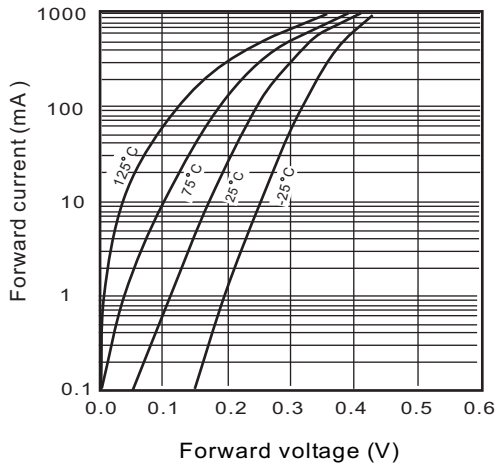


Fig. 2 - Reverse characteristics

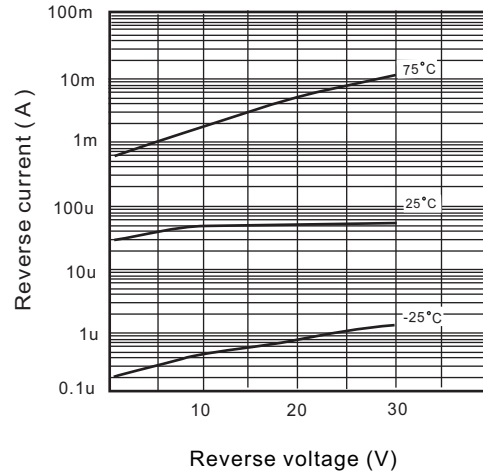


Fig. 3 - Capacitance between terminals characteristics

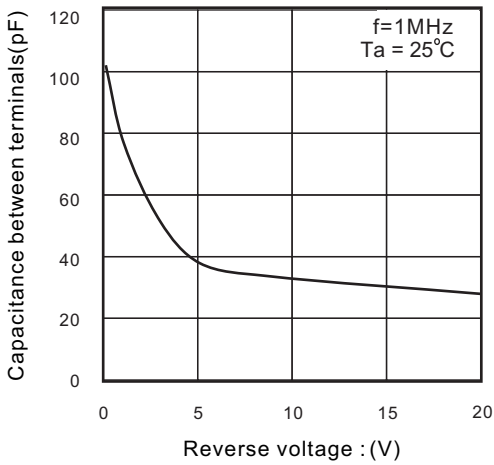


Fig. 4 - Current derating curve

