

# CM6620A

USB 2.0 High-Speed True HD Audio Processor




## DESCRIPTION

Cmedia CM6620A a USB2.0 high-speed audio processor that can support the latest USB Audio Device Class Definition V2.0 and 7.1-channel true high-definition audio and Line-In/Mic-In (all up to 192KHz/24bit). CM6620A solution integrates CM9882A as the default codec to provide high-fidelity 106dB SNR (48KHz@24bit) and ~-95dB THD+N (@1KHz) line output. It could also support 192KHz/24bit S/PDIF transmitter and receiver and also a USB2.0 MIDI I/O device for music creation applications. CM6620A has an embedded 8051 compatible microprocessor that can provide the best flexibility and functionality with the external upgradable 32KB NOR Flash ROM codes. With Cmedia versatile software technologies, CM6620A is a powerful audio core for high-value USB2.0 audio applications.

## FEATURES

- USB Spec. Rev.2.0 high-speed/full-speed mode compatible
- Latest USB Audio Device Class Definition Release 2.0/1.0 compatible (UAC2.0)
- USB Human Interface Device (HID) Class Definition Release 1.1 compliant
- Supports USB suspend/resume/reset functions
- Supports control, interrupt, bulk, and isochronous data transfers Output capability (With Cmedia CM9882A HD Codec)
- Embedded one USB MIDI I/O engine
- Integrated Intel HD-Audio codec compatible controller supports external HDA codec
- One pair of USB MIDI I/O interface for pro-audio application
- Embedded 8051 micro-processor to handle the comment/protocol transactions
- Connects to an external parallel NOR Flash/EEPROM memory (Max. 32KB) for firmware

## BLOCK DIAGRAM

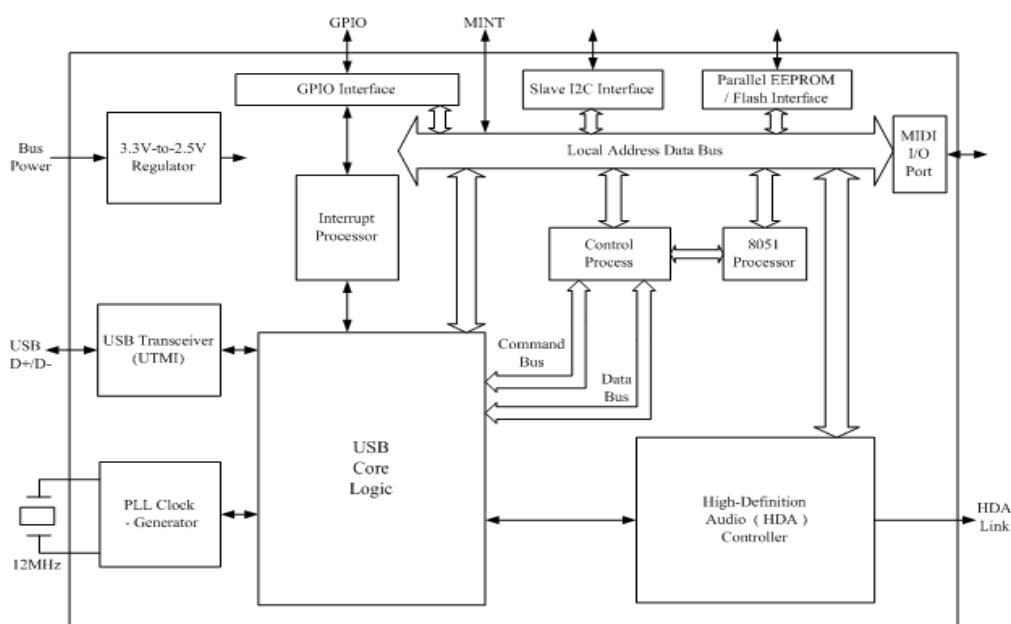

## TABLE OF CONTENTS

1.	Description and Overview .....	4
2.	Features.....	4
3.	Applications.....	7
4.	Block Diagram.....	8
5.	Pin Assignment .....	9
5.1	Pin-Out Diagram.....	9
5.2	Pin Description .....	10
6.	Electrical Characteristics .....	13
6.1	Maximum Ratings .....	13
6.2	Recommended Operation Conditions.....	13
6.3	Power Consumption .....	13
6.4	DC Characteristics .....	13
7.	Application Notes .....	14
7.1	Typical System Block Diagram .....	14
7.2	Reference Schematics .....	15
7.3	OS Compatibility.....	15
8.	Package Dimension .....	16

# CM6620A

USB 2.0 High-Speed True HD Audio Processor

---



## Release Note

Revision	Date	Description
0.1	2012/08/10	First release of preliminary technical information

# CM6620A

USB 2.0 High-Speed True HD Audio Processor

---



## 1. Description and Overview

CM6620A is a USB2.0 high-speed audio processor that can support the latest USB Audio Device Class Definition V2.0 and 7.1-channel true high-definition audio and Line-In/Mic-In (all up to 192KHz/24bit). CM6620A solution integrates CM9882A as the default codec to provide high-fidelity 106dB SNR (48KHz@24bit) and --95dB THD+N (@1KHz) line output. It could also support 192KHz/24bit S/PDIF transmitter and receiver and also a USB2.0 MIDI I/O device for music creation applications. CM6620A has an embedded 8051 compatible microprocessor that can provide the best flexibility and functionality with the external upgradable 32KB NOR Flash ROM codes. With Cmedia versatile software technologies, CM6620A is a powerful audio core for high-value USB2.0 audio applications.

## 2. Features

### USB Compliance

- USB Spec. Rev.2.0 high-speed/full-speed mode compatible
- Latest USB Audio Device Class Definition Release 2.0/1.0 compatible (UAC2.0)
- USB Human Interface Device (HID) Class Definition Release 1.1 compliant
- Supports USB suspend/resume/reset functions
- Supports control, interrupt, bulk, and isochronous data transfers

### Audio Engine

- Output capability (With CMEDIA CM9882A/A HD Audio Codec)
  - Up to 7.1 channel output
  - Sample Rate: 44.1K/48K/96K/192KHz (96K/192KHz are available only in USB Audio Class 2.0/High-speed mode)
  - Bit Resolution: 16/24 bit
  - Supports S/PDIF output via CM9882A/A codec
- Input capability (With CMEDIA CM9882A/A HD Audio Codec):
  - 2-channel input for Line-In & Mic-In
  - Supported Sample Rate: 44.1K/48K/96K/192KHz (192KHz are available only in USB Audio Class 2.0/High-speed mode)
  - Bit Resolution: 16/24 bit
  - Supports S/PDIF input
- Embedded one USB MIDI I/O engine

# CM6620A

## USB 2.0 High-Speed True HD Audio Processor

---



### Audio I/O

- Integrated Intel HD-Audio codec compatible controller supports external HDA codec
- One pair of USB MIDI I/O interface for pro-audio application

### Integrated 8051 Micro-processor

- Embedded 8051 micro-processor to handle the comment/protocol transactions
- Connects to an external parallel NOR Flash/EEPROM memory (Max. 32KB, 55ns access time is required) for firmware ROM codes
- HID interrupts can be implemented via firmware codes
- Provides maximum HW configuration flexibility with upgradable firmware codes
- VID/PID/Product String can be customized via firmware code programming

### Control Interface

- Slave I2C control interface for external master device communication
- Interrupt pin for external master device read transaction
- 6 GPIO pins

### General

- Embedded USB2.0 transceiver (up to 480MB bandwidth)
- Auto detection for high-speed/full-speed
- GPIO pin for USB Audio Class 2.0 and 1.0 application mode configuration
- Only single 12MHz crystal input is required (embedded PLL function)
- Only single 3.3V power supply required (embedded 3.3V to 2.5V regulator for digital core)
- 3.3V digital I/O pads with 5V tolerance
- Industrial standard LQFP-64 package

### Value-added Software Features:

- Supports USB Audio Class 2.0 and high-speed mode on Windows® XP, Vista, and Windows® 7 with Cmedia vendor drivers
- USB Audio class 1.0 with full-speed/high-speed modes compatible with Windows® XP, Vista, 7 UAA driver, Mac OS X and Linux embedded USB audio drivers
- For Windows, Cmedia drivers provide the following Key Features:
  - Playback feedback endpoints to control the data transmission accuracy and to maximize the audio quality
  - Xear™ Pro
    - Supports ASIO2.2 driver
  - Xear™ Living
    - 27 global environment effects
    - 10-band Equalizer with 12 preset modes
    - 7.1 virtual speaker shifter

# CM6620A

## USB 2.0 High-Speed True HD Audio Processor

---



- Smart volume normalize(SVN)
- FlexBass II(bass management and enhancement)
- Xear™ 3D EX
  - Supports most industrial standards of PC 3D sound for gaming, including DirectSound™ 3D SW & HW and EAX™ 1.0&2.0 on Windows XP
- Xear™ Surround
  - Surround headphone(virtual 5.1 surround and 3D positional sounds, natural stereo music out-of-head to reduce fatigue)
  - Surround speaker(virtual 5.1 surround and 3D positional sounds, widening stereo 3D sound stage)
- Xear™ new GUI
  - Matching Vista/7 APO driver architecture
  - User profile setting
  - Customizable graphics and layout

# CM6620A

USB 2.0 High-Speed True HD Audio Processor

---



## 3. Applications

- Laptop/desktop docking system with USB2.0 audio features and high-speed
- High-quality USB2.0 multi-channel headphone/headset
- USB A/V receiver
- ExpressCard compatible USB audio adaptor
- Portable high-quality USB2.0 audio box for laptops
- USB DAC/Speaker/HP Amp
- VGA card/MB integrated USB2.0 audio
- Wired or wireless USB hub with audio features
- Professional PC musician instruments/applications (recording mixer, keyboard, electrical guitar, etc.)
- Pure USB MIDI devices
- USB2.0 VideoCam/Video Capture/VOIP Box with mic/audio features
- Consumer stereo systems with embedded USB audio (portable CD/FM/MP3 players)


# CM6620A

USB 2.0 High-Speed True HD Audio Processor



## 4. Block Diagram

CM6620A Functional Block Diagram

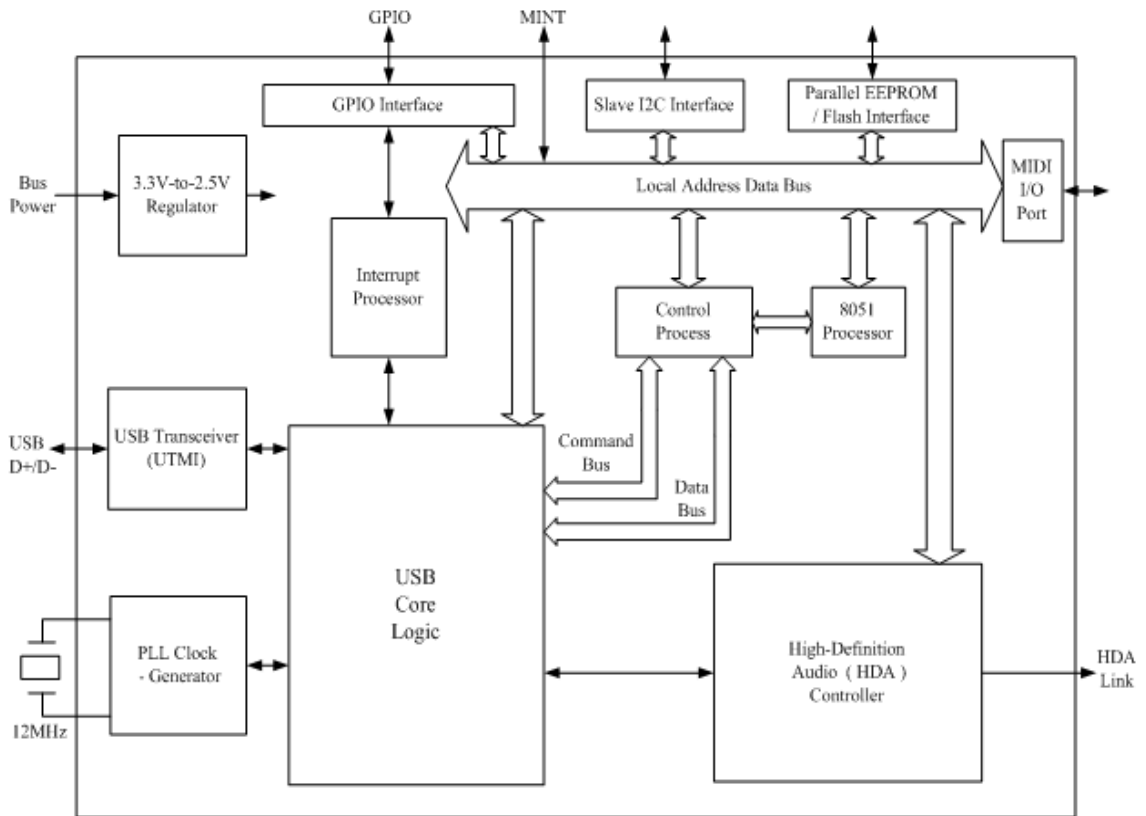




# CM6620A

USB 2.0 High-Speed True HD Audio Processor



## 5. Pin Assignment

### 5.1 Pin-Out Diagram

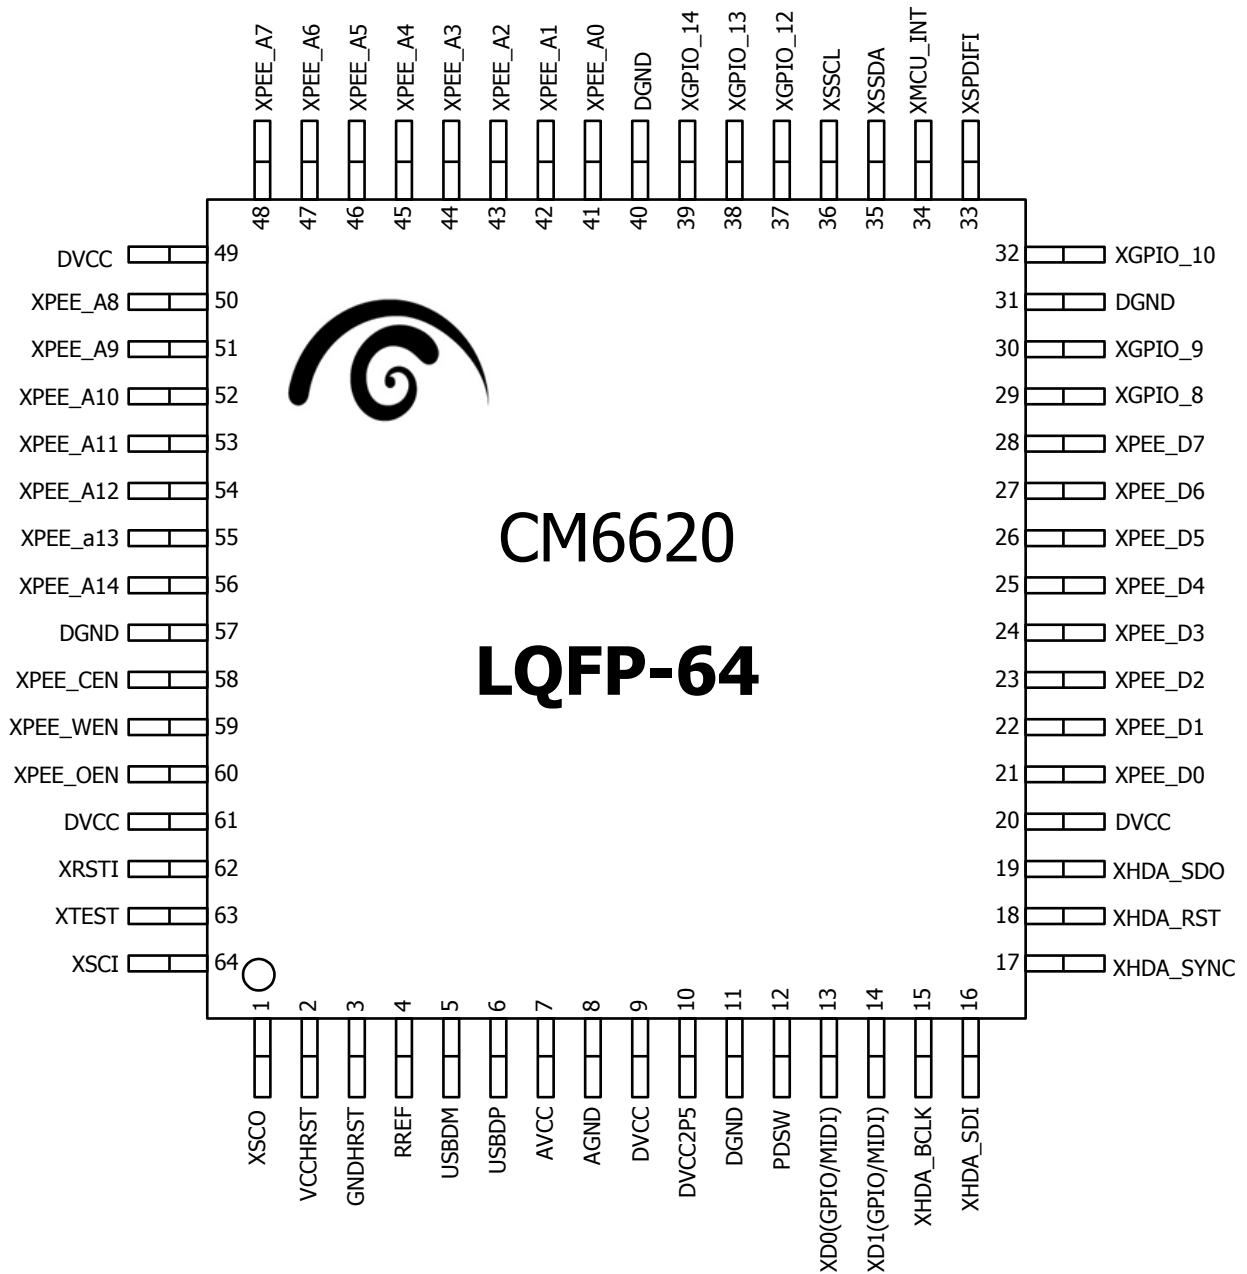

### 5.2 Pin Description

Pin #	Symbol	I/O	Description
<b>Clock</b>			
64	XSCI	AI	12MHz crystal oscillator input
1	XSCO	AO	12MHz crystal oscillator output
<b>USB2.0 BUS Interface</b>			
5	USBDM	AIO	USB 2.0 data negative (USB D- signal)
6	USBDP	AIO	USB 2.0 data positive (USB D+ signal)
<b>Power/Ground</b>			
2	VCCHSRT	AI	USB PHY analog power supply pin (3.3V)
3	GNDHSRT	AI	USB PHY analog ground
7	AVCC	AI	USB PHY analog power supply pin (3.3V)
8	AGND	A	USB PHY analog ground
9	DVCC	DI	Digital power supply pin (3.3V)
10	DVCC2P5	DO	Digital power filter pin (2.5V), connecting external filter capacitors
11	DGND	D	Digital Ground
20	DVCC	DI	Digital power supply pin (3.3V)
31	DGND	D	Digital Ground
40	DGND	D	Digital Ground
50	DVCC	DI	Digital power supply pin (3.3V)
57	DGND	D	Digital Ground
61	DVCC	DI	Digital power supply pin (3.3V)
<b>S/PDIF I</b>			
33	SPDIFI	DI	S/PDIF receiver 3.3v input buffer, Schmitt trigger, pull-down
<b>MCU Port 3/MIDI Interface</b>			
13	XD0/MIDI_RX	DIO	MCU port 3 bit 0 (MIDI RXD, serial input port) Programmable 3.3V/5V tolerance bidirectional buffer, pull-down
14	XD1/MIDI_TX	DIO	MCU port 3 bit 1 (MIDI TXD, serial output port) Programmable 3.3V bidirectional buffer, pull-down
<b>High-Definition Audio Interface</b>			
15	XHDA_BCK	DO	HDA link bit clock (24MHz) Programmable 3.3V output buffer
16	XHDA_SDI	DI	HDA link serial data in Programmable 3.3V bidirectional buffer, pull-down
17	XHDA_SYNC	DO	HDA link frame synchronization Programmable 3.3V output buffer

18	XHDA_RST	DO	HDA link reset signal, active low Programmable 3.3V output buffer
19	XHDA_SDO	DO	HDA link serial data out Programmable 3.3V output buffer
<b>Parallel EEPROM/Flash Memory Interface</b>			
21	XPEE_D0	DIO	Parallel EEPROM/FLASH data in/out 0 Programmable 3.3V bidirectional buffer, pull-down
22	XPEE_D1	DIO	Parallel EEPROM/FLASH data in/out 1 Programmable 3.3V bidirectional buffer, pull-down
23	XPEE_D2	DIO	Parallel EEPROM/FLASH data in/out 2 Programmable 3.3V bidirectional buffer, pull-down
24	XPEE_D3	DIO	Parallel EEPROM/FLASH data in/out 3 Programmable 3.3V bidirectional buffer, , , pull-down
25	XPEE_D4	DIO	Parallel EEPROM/FLASH data in/out 4 Programmable 3.3V bidirectional buffer, pull-down
26	XPEE_D5	DIO	Parallel EEPROM/FLASH data in/out 5 Programmable 3.3V bidirectional buffer, pull-down
27	XPEE_D6	DIO	Parallel EEPROM/FLASH data in/out 6 Programmable 3.3V bidirectional buffer, pull-down
28	XPEE_D7	DIO	Parallel EEPROM/FLASH data in/out 7 Programmable 3.3V bidirectional buffer, pull-down
58	XPEE_CEN	DO	Parallel EEPROM/FLASH chip enable, active low Programmable 3.3V output buffer
59	XPEE_WEN	DIO	Parallel EEPROM/FLASH write enable, active low Programmable 3.3V bidirectional buffer, pull-down
60	XPEE_OEN	DIO	Parallel EEPROM/FLASH read enable, active low Programmable 3.3V bidirectional buffer, pull-down
41	XPEE_A0	DIO	Parallel EEPROM/FLASH address 0 Programmable 3.3V bidirectional buffer, pull-down
42	XPEE_A1	DIO	Parallel EEPROM/FLASH address 1 Programmable 3.3V bidirectional buffer, pull-down
43	XPEE_A2	DIO	Parallel EEPROM/FLASH address 2 Programmable 3.3V bidirectional buffer, pull-down
44	XPEE_A3	DIO	Parallel EEPROM/FLASH address 3 Programmable 3.3V bidirectional buffer, pull-down
45	XPEE_A4	DIO	Parallel EEPROM/FLASH address 4 Programmable 3.3V bidirectional buffer, pull-down
46	XPEE_A5	DIO	Parallel EEPROM/FLASH address 5 Programmable 3.3V bidirectional buffer, pull-down
47	XPEE_A6	DIO	Parallel EEPROM/FLASH address 6 Programmable 3.3V bidirectional buffer, pull-down
48	XPEE_A7	DIO	Parallel EEPROM/FLASH address 7 Programmable 3.3V bidirectional buffer, pull-down
50	XPEE_A8	DIO	Parallel EEPROM/FLASH address 8 Programmable 3.3V bidirectional buffer, pull-down
51	XPEE_A9	DIO	Parallel EEPROM/FLASH address 9 Programmable 3.3V bidirectional buffer, pull-down
52	XPEE_A10	DIO	Parallel EEPROM/FLASH address 10 Programmable 3.3V bidirectional buffer, pull-down
53	XPEE_A11	DIO	Parallel EEPROM/FLASH address 11 Programmable 3.3V bidirectional buffer, pull-down

54	XPEE_A12	DIO	<a href="#">Parallel EEPROM/FLASH address 12</a> Programmable 3.3V bidirectional buffer, pull-down
55	XPEE_A13	DIO	<a href="#">Parallel EEPROM/FLASH address 13</a> Programmable 3.3V bidirectional buffer, pull-down
56	XPEE_A14	DIO	<a href="#">Parallel EEPROM/FLASH address 14</a> Programmable 3.3V bidirectional buffer, pull-down
<b>GPIO and MCU Port 1 Interface</b>			
29	XGPIO_8	DIO	<a href="#">General purpose input/output 8 (default output)</a> . Programmable 3.3V/5V tolerance bidirectional buffer, pull-down
30	XGPIO_9	DIO	<a href="#">General purpose input/output 9 (default output)</a> Programmable 3.3V/5V tolerance bidirectional buffer, pull-down
32	XGPIO_10	DIO	<a href="#">General purpose input/output 10 (default input)</a> Programmable 3.3V/5V tolerance bidirectional buffer, pull-down
37	XGPIO_12	DIO	<a href="#">General purpose input/output 12 (default input)</a> Programmable 3.3V/5V tolerance bidirectional buffer, pull-down
38	XGPIO_13	DIO	<a href="#">General purpose input/output 13 (default input)</a> Programmable 3.3V/5V tolerance bidirectional buffer, pull-down
39	XGPIO_14	DIO	<a href="#">General purpose input/output 14 (default input)</a> Programmable 3.3V/5V tolerance bidirectional buffer, pull-down
<b>2-Wire Slave Serial Bus (I2C)</b>			
34	XMCU_INT	DO	<a href="#">Interrupt output for external MCU</a> Programmable 3.3V output buffer
35	XSSDA	DIO	<a href="#">2-wire slave serial data</a> Programmable 3.3V/5V tolerant bidirectional buffer, pull-down
36	XSSCL	DIO	<a href="#">2-wire slave serial clock</a> Programmable 3.3V/5V tolerant bidirectional buffer, pull-down
<b>Miscellaneous</b>			
4	RREF	AI	<a href="#">Connect external reference resistor (12KΩ±1%)</a>
62	XRSTI	DI	<a href="#">CM6620A Reset pin (high: reset)</a>
63	XTEST	DI	<a href="#">Test Mode Select Pin:</a> H: Test Mode L: Normal Operation

### 6. Electrical Characteristics

#### 6.1 Maximum Ratings

Test Conditions;  $V_{DD} = 3.3V$ ,  $DGND = 0V$ ,  $TA = +25^{\circ}C$

Parameter	Symbol	Min	Typ	Max	Units
Storage temperature	-	-55	-	150	$^{\circ}C$
Operating ambient temperature	-	0	25	75	$^{\circ}C$
DC supply voltage	-	3.0	3.3	3.6	V
I/O pin voltage	-	GND	-	$V_{DD}$	V
Power dissipation	-	-	0.15	-	W

#### 6.2 Recommended Operation Conditions

Test Conditions:  $V_{DD} = 3.3V$ ,  $DGND = 0V$ ,  $TA = +25^{\circ}C$

Parameter	Symbol	Min	Typ	Max	Units
Input voltage range	-	$V_{DD}-0.3$	$V_{DD}$	$V_{DD}+0.3$	V
Output voltage range	-	0	-	$V_{DD}$	V

#### 6.3 Power Consumption

Test Conditions:  $DV_{DD} = 3.3V$ ,  $DGND = 0V$ ,  $TA = +25^{\circ}C$

Parameter	Symbol	Min	Typ	Max	Units
Supply current : power up	-	-	86.02-		mA
Supply current : suspend	-	-	0.43		mA

#### 6.4 DC Characteristics

Test Conditions:  $DV_{DD} = 3.3V$ ,  $DGND = 0V$ ,  $TA = +25^{\circ}C$

Parameter	Symbol	Min	Typ	Max	Units
Input voltage range	$V_{in}$	$V_{DD}-0.3$	$V_{DD}$	$V_{DD}+0.3$	V
Output voltage range	$V_{out}$	0	-	$V_{DD}$	V
High level input voltage	$V_{ih}$	$0.7V_{DD}$	-	-	V
Low level input voltage	$V_{il}$	-	-	$0.3V_{DD}$	V
High level output voltage	$V_{oh}$	2.4	-	-	V
Low level output voltage	$V_{ol}$		-	0.4	V
Input leakage current	$I_{il}$	-10	-	10	$\mu A$
Output leakage current	$I_{ol}$	-10	-	10	$\mu A$
Output buffer driver current	-	-	8	-	mA
SPDIF transmit output driver current	-	-	8	-	mA

# CM6620A


USB 2.0 High-Speed True HD Audio Processor



## 7. Application Notes

### 7.1 Typical System Block Diagram

Cmedia offers a total solution kit including CM6620A USB2.0 audio controller and high-quality CM9882A 8ch codec. The reference system design is as the following block diagram:

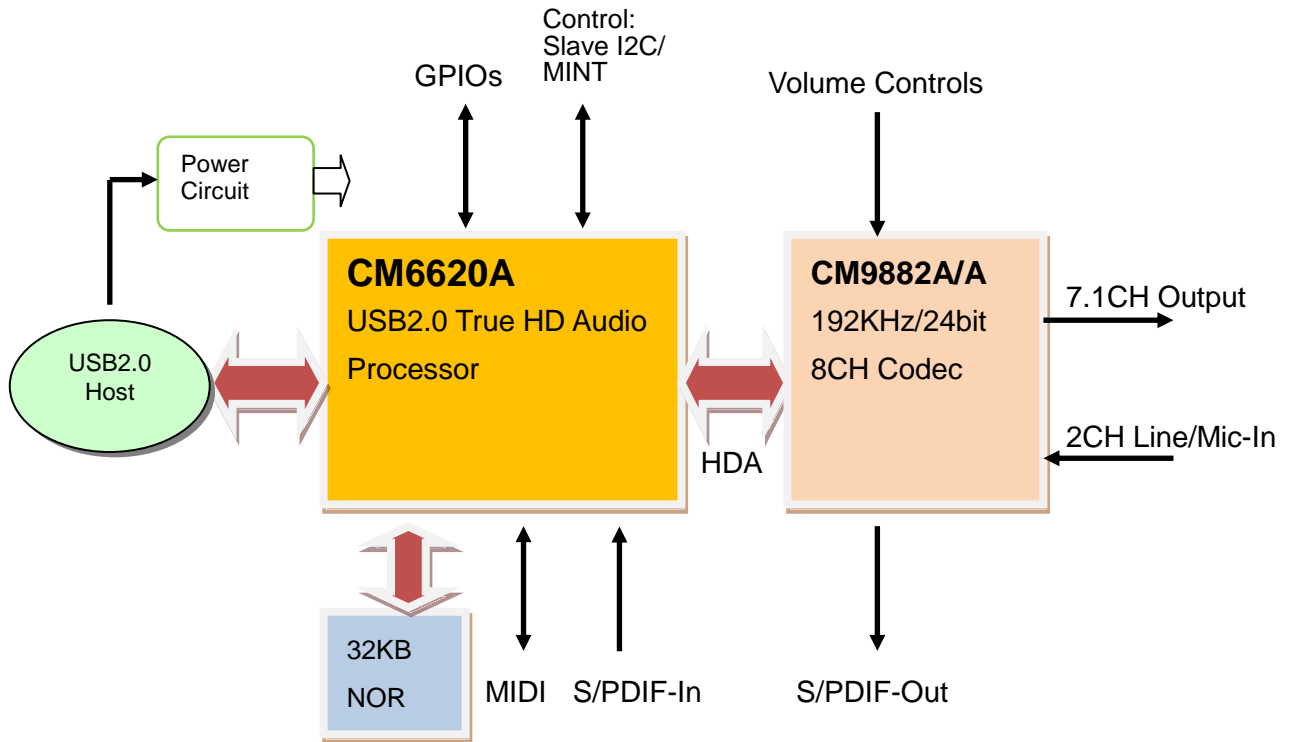

# CM6620A

USB 2.0 High-Speed True HD Audio Processor



## 7.2 Reference Schematics

Please refer to up-to-date Cmedia CM6620A EVB Schematics file.

## 7.3 OS Compatibility

The following table shows the current compatibility with various OS:


	UAC 2.0	UAC 1.0
Windows XP	Cmedia Driver	Windows UAA driver
Windows Vista	Cmedia Driver	Windows UAA driver
Windows 7	Cmedia Driver	Windows UAA driver
Mac OS X 10.5	Mac or Cmedia Driver	Mac Driver
Linux	TBD	Linux Driver

# CM6620A

USB 2.0 High-Speed True HD Audio Processor



## 8. Package Dimension

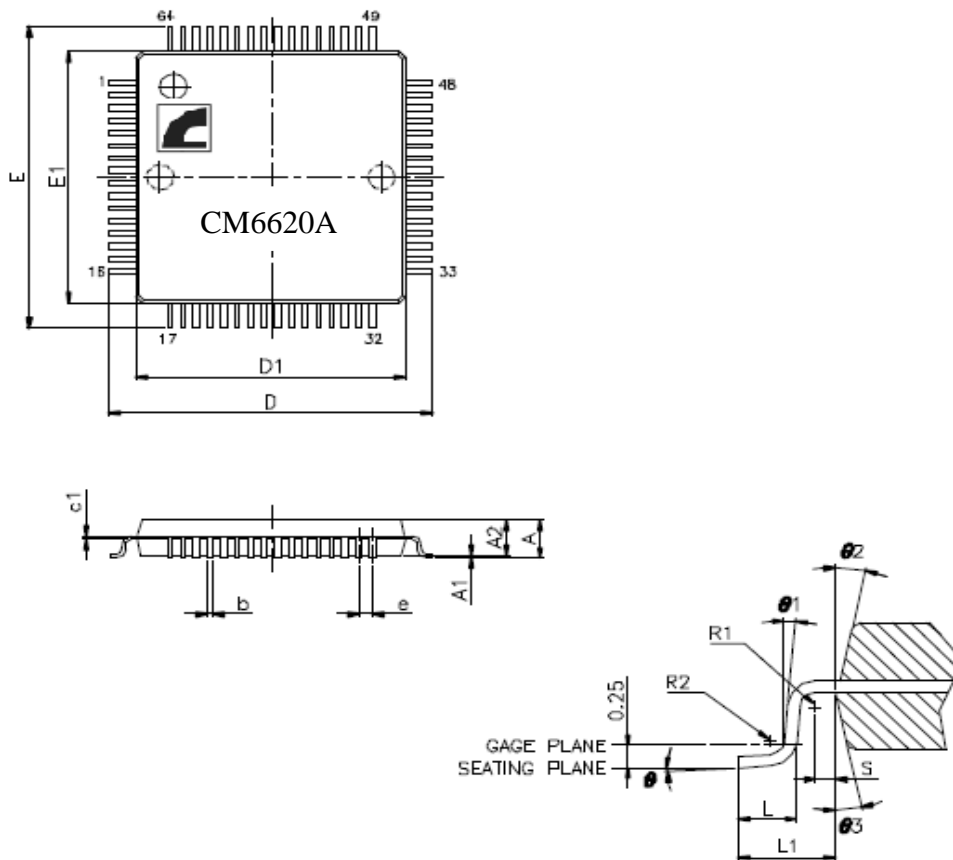

VARIATIONS (ALL DIMENSIONS SHOWN IN MM)

SYMBOLS	MIN.	NOM.	MAX.
A	—	—	1.60
A1	0.05	—	0.15
A2	1.35	1.40	1.45
b	0.17	0.22	0.27
c1	0.09	—	0.16
D	11.75	12.00	12.25
D1	9.90	10.00	10.10
E	11.75	12.00	12.25
E1	9.90	10.00	10.10
e	0.50 BSC		
L	0.45	0.60	0.75
L1	1.00 REF		
S	0.20 REF		
Ø1	3.5° REF		
Ø2	5.0° REF		
Ø3	12° REF		
R1	0.16 REF		
R2	0.15 REF		

NOTES:

1. JEDEC OUTLINE: MS-026 BCD
2. DIMENSIONS D1 AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.25mm PER SIDE. D1 AND E1 ARE MAXIMUM PLASTIC BODY SIZE DIMENSIONS INCLUDING MOLD MISMATCH.
3. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL NOT CAUSE THE LEAD WIDTH TO EXCEED THE MAXIMUM b DIMENSION BY MORE THAN 0.08mm.



# CM6620A

USB 2.0 High-Speed True HD Audio Processor

---



— End of Specifications —

**C-MEDIA ELECTRONICS INC.**

6F., 100, Sec. 4, Civil Boulevard, Taipei, Taiwan 106 R.O.C.

TEL : +886-2-8773-1100

FAX : +886-2-8773-2211

E-MAIL : [sales@cmedia.com.tw](mailto:sales@cmedia.com.tw)

**Disclaimer:**

Information furnished by C-Media Electronics Inc. is believed to be accurate and reliable. However, no responsibility is assumed by C-Media Electronics Inc. for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of C-Media. Trademark and registered trademark are the property of their respective owners.

---

[www.cmedia.com.tw](http://www.cmedia.com.tw)

Copyright © C-Media Electronics Inc.

Rev. 0.1 | Page 17/16