

Silicon PNP Power Transistors

2SA656

DESCRIPTION

- With TO-3 package
- Wide area of safe operation
- Complement to type 2SC519

APPLICATIONS

- For audio frequency and power amplifier applications

PINNING(see Fig.2)

PIN	DESCRIPTION
1	Base
2	Emitter
3	Collector

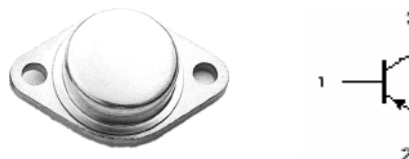


Fig.1 simplified outline (TO-3) and symbol

Absolute maximum ratings($T_a = \square$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-130	V
V_{CEO}	Collector-emitter voltage	Open base	-130	V
V_{EBO}	Emitter-base voltage	Open collector	-5	V
I_C	Collector current		-7	A
P_C	Collector power dissipation	$T_C = 25 \square$	50	W
T_j	Junction temperature		150	$\square$
T_{stg}	Storage temperature		-55~150	$\square$

Silicon PNP Power Transistors

2SA656

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C = -25mA ; I_B = 0$	-130			V
$V_{(BR)CBO}$	Collector-base breakdown voltage	$I_C = -1mA ; I_E = 0$	-130			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E = -1mA ; I_C = 0$	-5			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C = -5A ; I_B = -1A$			-2.0	V
V_{BEsat}	Base-emitter saturation voltage	$I_C = -5A ; I_B = -1A$			-2.5	V
I_{CBO}	Collector cut-off current	$V_{CB} = -130V ; I_E = 0$			-0.1	mA
I_{EBO}	Emitter cut-off current	$V_{EB} = -5V ; I_C = 0$			-0.1	mA
h_{FE}	DC current gain	$I_C = -1A ; V_{CE} = -5V$	30		300	
C_{OB}	Collector output capacitance	$I_E = 0 ; V_{CB} = -10V ; f = 1MHz$		150		pF
f_T	Transition frequency	$I_C = -1A ; V_{CE} = -10V$		5		MHz

Silicon PNP Power Transistors

2SA656

PACKAGE OUTLINE

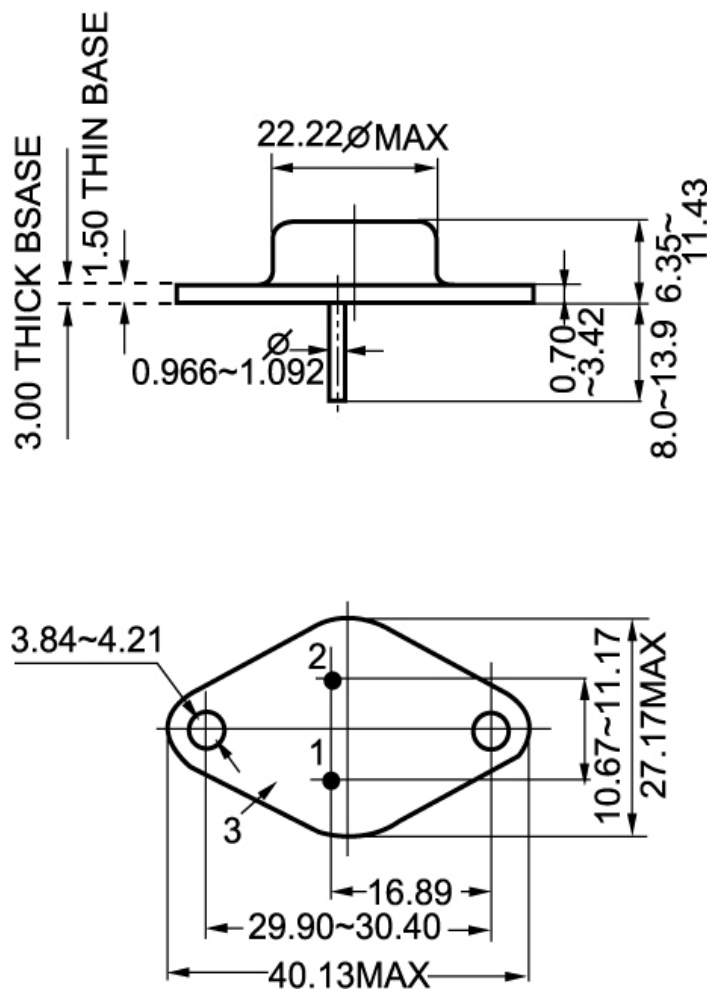


Fig.2 outline dimensions (unindicated tolerance:±0.1mm)