

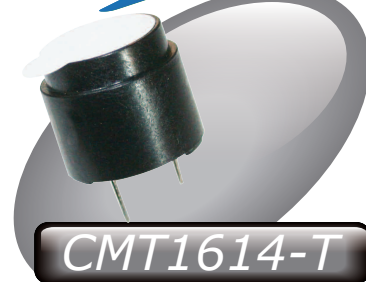





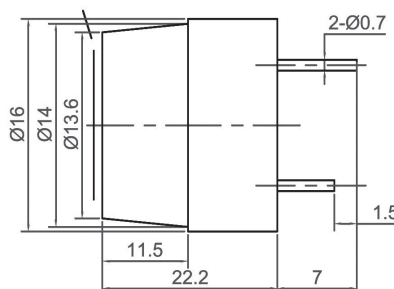






Magnetic Transducer (AC)




Canopus Part no.	Operating Voltage (V)	Rated Voltage (V)	Max Rated Current (mA)	Coil Resistance (Ω)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Operating Temperature ($^{\circ}$ C)	Housing	Weight (g)
CMT1614A2048NPT	1 ~ 2	1.5	18	27 ± 3	80 at 10cm	2048	-25 ~ +75	Noryl	7
CMT1614F2048NPT	3 ~ 12	6	40	50 ± 6	85 at 10cm	2048	-25 ~ +70	Noryl	7
CMT1614H2048NPT	6 ~ 18	12	40	115 ± 12	85 at 10cm	2048	-25 ~ +70	Noryl	7



Canopus Part no.	Operating Voltage (V)	Rated Voltage (V)	Max Rated Current (mA)	Coil Resistance (Ω)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Operating Temperature ($^{\circ}$ C)	Housing	Weight (g)
CMT1622A2048NP	1 ~ 3	1.5	18	27 ± 3	80 at 10cm	2048	-20 ~ +70	Noryl	5

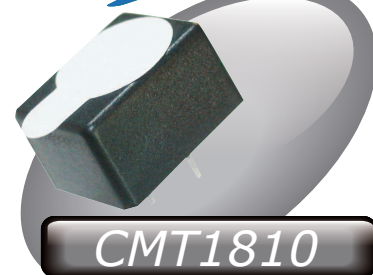

Canopus Part no.	Operating Voltage (V)	Rated Voltage (V)	Max Rated Current (mA)	Coil Resistance (Ω)	Min Sound Output (dBA)	Resonant Frequency (Hz)	Operating Temperature ($^{\circ}$ C)	Housing	Weight (g)
CMT1810A2048NPR	1 ~ 2	1.5	40	14 ± 9	80 at 10cm	2000~2500	-20 ~ +70	Noryl	7
CMT1810F2048NPR	3 ~ 10	6	40	60 ± 9	90 at 10cm	2000~2500	-30 ~ +85	Noryl	7
CMT1810H2048NPR	6 ~ 15	12	40	120 ± 18	85 at 10cm	2000~2500	-30 ~ +85	Noryl	7



Your Efficient Supplier
www.canopus.com.hk

TEL.: (852) 2806 2812

Fax: (852) 2652 2216