


**Description**

CRM60GJ10E4 are 3-phase Integrated Power Modules (IPM) designed for advanced appliance motor drive applications such as refrigerator compressor and pumps.

CRM60GJ10E4 Integrated 6 low-loss IGBTs and FRDs, 3-phase full bridge drivers in a familiar package. The modules are optimized for low EMI characteristics.

**Features**

- 600V/10A three-phase inverter
- Works with 3.3V/5V MCU
- Integrated under-voltage protection
- Integrated high accurate short-circuit current protection
- Integrated >40µs fault duration time
- Integrated built-in temperature-sensing
- Integrated over temperature protection
- Integrated bootstrap diodes with current limiting resistor
- Isolation rating: 1500 Vrms/min



DIP-24L


**Applications**


- Refrigerator compressor
- Air condition compressor
- Pumps

**Package Marking and Ordering Information**

Part #	Marking	Package	Packing	Quantity	Green
CRM60GJ10E4	CRM60GJ10E4	DIP-24L	Tube	300	RoHS/HF


**Internal Electrical Schematic**

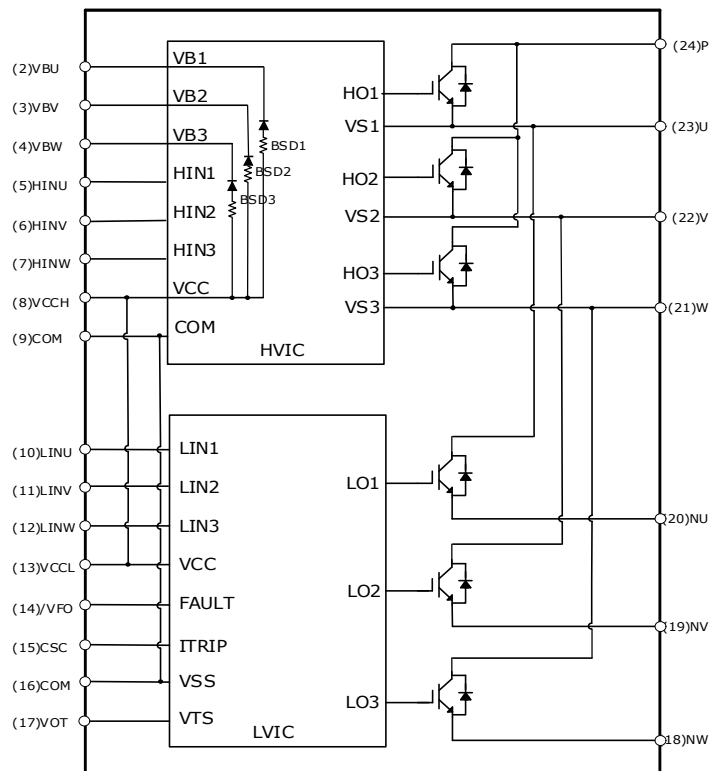

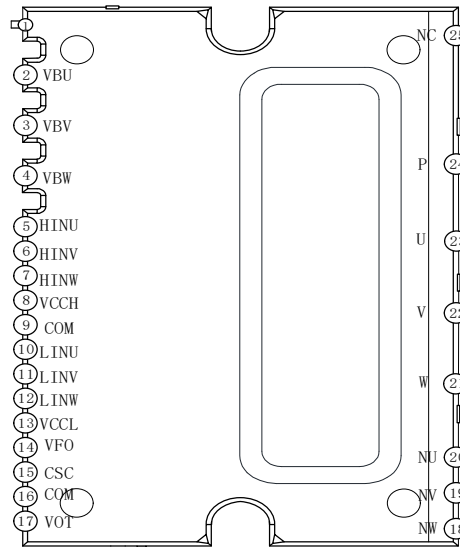**Module Pin-Out Description**

**Bottom view**

Pin Number	Pin Name	Description
2	VBU	High Side Floating Supply Voltage U
3	VBV	High Side Floating Supply Voltage V
4	VBW	High Side Floating Supply Voltage W
5	HINU	Logic Input for High Side Gate Driver - Phase U
6	HINV	Logic Input for High Side Gate Driver - Phase V
7	HINW	Logic Input for High Side Gate Driver - Phase W
8	VCCH	High side IC supply voltage
9	COM	Logic Ground
10	LINU	Logic Input for Low Side Gate Driver - Phase U
11	LINV	Logic Input for Low Side Gate Driver - Phase V
12	LINW	Logic Input for Low Side Gate Driver - Phase W
13	VCCL	Low side IC supply voltage
14	VFO	Fault output / Temperature monitor
15	CSC	External capacitance, Over current shutdown input
16	COM	Logic Ground
17	VOT	Output for Temperature Sensing
18	NW	Phase W Low Side Emitter
19	NV	Phase V Low Side Emitter
20	NU	Phase U Low Side Emitter
21	W	Output - Phase W, High Side Floating Supply Offset W
22	V	Output - Phase V, High Side Floating Supply Offset V
23	U	Output - Phase U, High Side Floating Supply Offset U
24	P	DC Bus Voltage Positive
25	NC	Not Connected

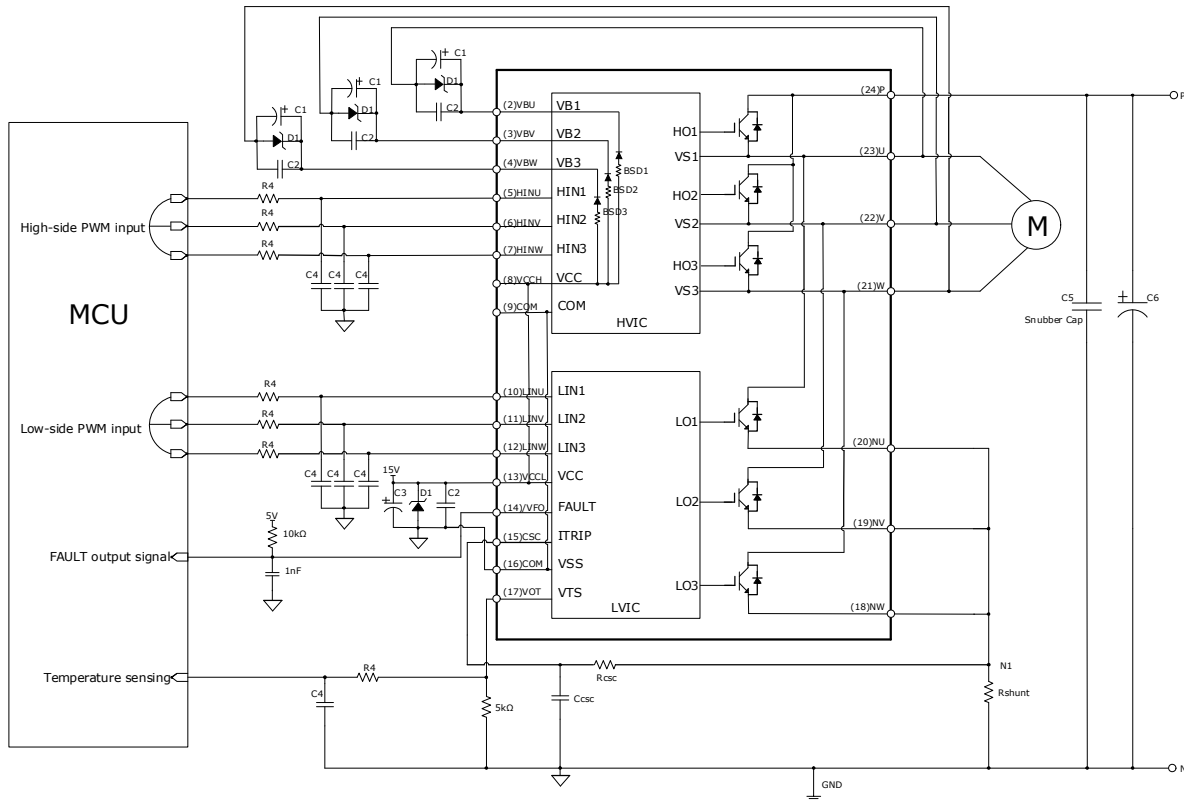**Application Circuit**




**Remark:**

- 1、 To prevent malfunction, the wiring of each input should be as short as possible.
- 2、 Input drive is High-Active type. There is a 5kΩ (typ.) pull-down resistor integrated in the IC input circuit. And adding RC filter circuit to the input will prevent the surge noise caused by incorrect input.
- 3、 To prevent surge damage, it is recommended to add a high-frequency non-inductive flat capacitor (0.1uF to 0.22uF) between P and N. The cable connection of the capacitor should be as short as possible.
- 4、 The line between the current detection resistor and the IPM should be as short as possible, otherwise the large surge voltage generated by the connecting inductor may cause damage.
- 5、 All capacitors should be mounted as close to the terminals of the IPM as possible.
- 6、 FO output is open drain type. It should be pulled up to the positive side of 5V power supply by a resistor of about 10kΩ.
- 7、 The time constant  $R_{csc}$  and  $C_{csc}$  of the protection circuit should be selected in the range of 1.5-2.0  $\mu s$ .

**Package Outline**

**DIP-24L**

**UNIT:mm**

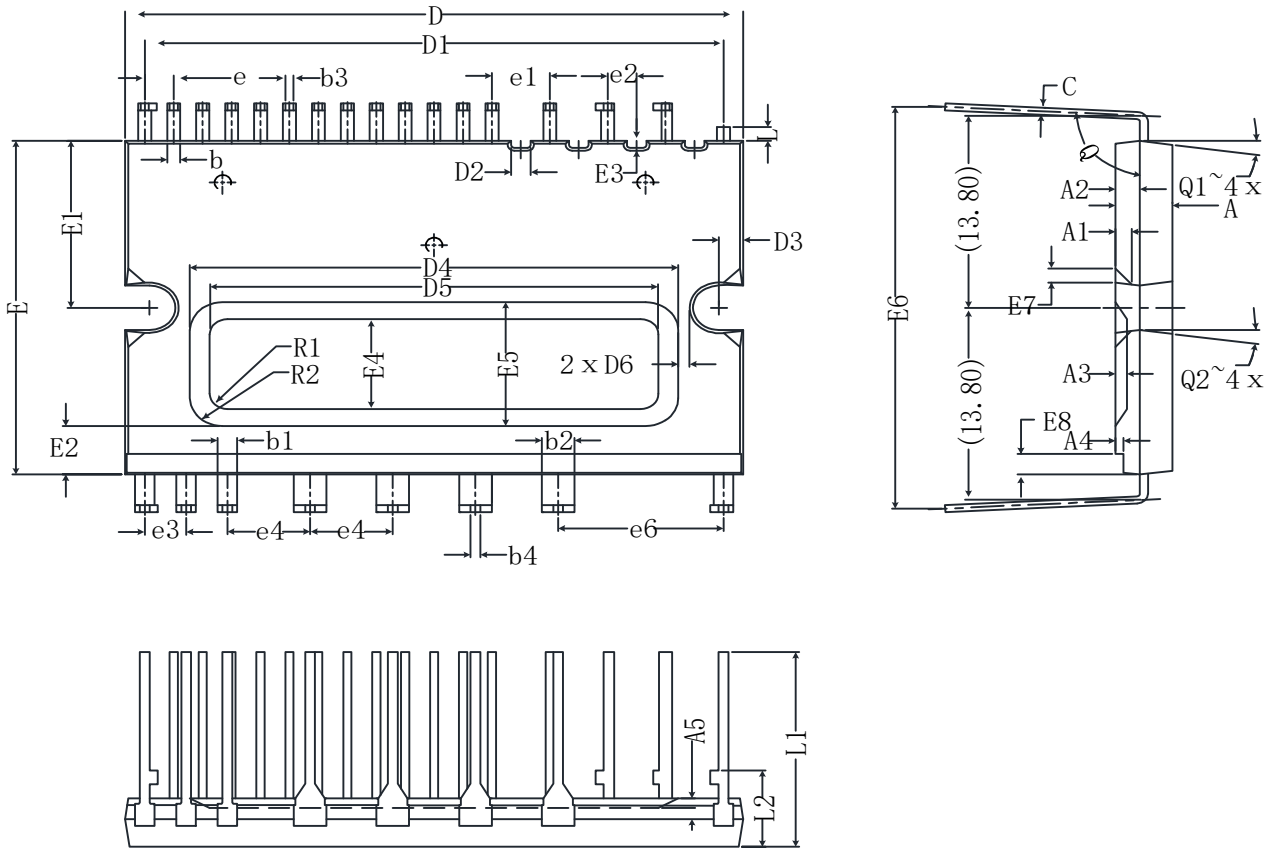

SYMBOL	COMMON			SYMBOL	COMMON		
	Dimensions millimeter				Dimensions millimeter		
	Min	Nom	Max		Min	Nom	Max
A	3.35	3.50	3.65	E2	3.35	3.50	3.65
A1	0.85	1.00	1.15	E3	0.35	0.50	0.65
A2	1.35	1.50	1.65	E4	6.33	6.48	6.63
A3	0.55	0.70	0.85	E5	8.75	8.90	9.05
A4	0.35	0.50	0.65	E6	28.40	28.90	29.40
A5	0.55	0.70	0.85	E7	0.85	1.00	1.15
b	0.74	0.83	0.92	E8	1.35	1.50	1.65
b1	1.14	1.23	1.32	e	1.728	1.778	1.828
b2	1.94	2.03	2.12	e1	3.506	3.556	3.606
b3	0.44	0.53	0.62	e2	1.728	1.778	1.828
b4	0.54	0.63	0.72	e3	2.490	2.540	2.590
C	0.426	0.516	0.606	e4	5.030	5.080	5.130
D	37.85	38.00	38.15	e5	5.030	5.080	5.130
D1	35.41	35.56	35.71	e6	10.11	10.16	10.21
D2	1.05	1.20	1.35	L	0.91	1.00	1.09
D3	1.35	1.50	1.65	L1	13.80	14.00	14.20
D4	29.85	30.00	30.15	L2	5.40	5.50	5.60
D5	27.43	27.58	27.73	Q	90°	92.5°	95°
D6	0.64	0.69	0.74	Q1	7°	8°	9°
E	23.85	24.00	24.15	Q2	7°	8°	9°
E1	11.85	12.00	12.15				