


Description

CRM60GJ15E4 are 3-phase Integrated Power Modules (IPM) designed for advanced appliance motor drive applications such as refrigerator compressor and pumps.

CRM60GJ15E4 Integrated 6 low-loss IGBTs and FRDs, 3-phase full bridge drivers in a familiar package. The modules are optimized for low EMI characteristics.

Features

- 600V/15A three-phase inverter
- Works with 3.3V/5V MCU
- Integrated under-voltage protection
- Integrated high accurate short-circuit current protection
- Integrated >40µs fault duration time
- Integrated built-in temperature-sensing
- Integrated over temperature protection
- Integrated bootstrap diodes with current limiting resistor
- Isolation rating: 1500 Vrms/min



DIP-24L


Applications


- Refrigerator compressor
- Air condition compressor
- Pumps

Package Marking and Ordering Information

| Part # | Marking | Package | Packing | Quantity | Green |
|-------------|-------------|---------|---------|----------|---------|
| CRM60GJ15E4 | CRM60GJ15E4 | DIP-24L | Tube | 300 | RoHS/HF |


Internal Electrical Schematic

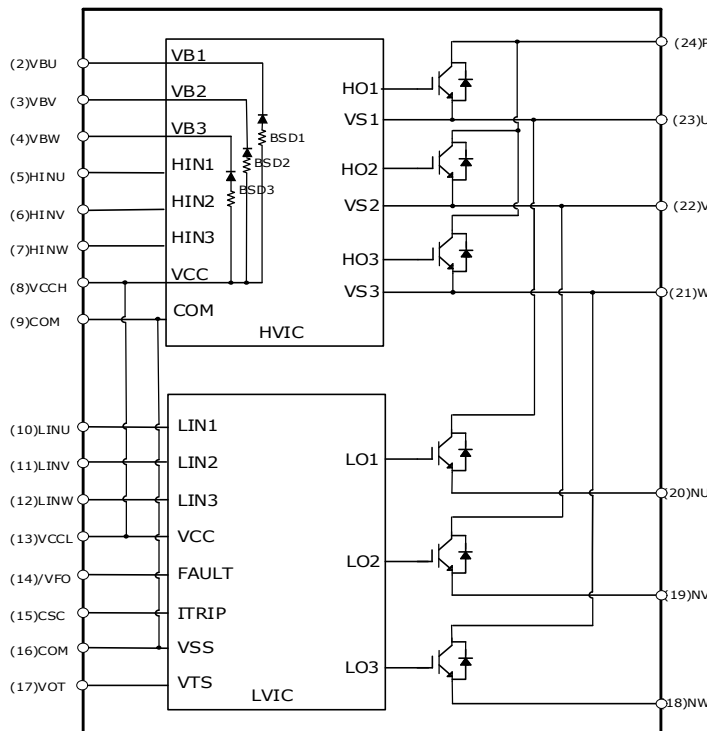

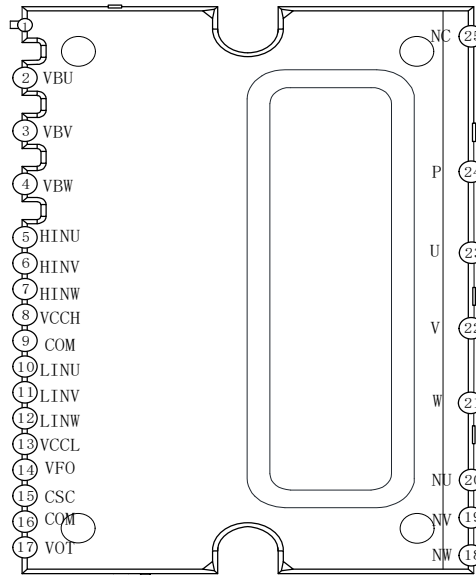Module Pin-Out Description

Bottom view

| Pin Number | Pin Name | Description |
|------------|----------|--|
| 2 | VBU | High Side Floating Supply Voltage U |
| 3 | VBV | High Side Floating Supply Voltage V |
| 4 | VBW | High Side Floating Supply Voltage W |
| 5 | HINU | Logic Input for High Side Gate Driver - Phase U |
| 6 | HINV | Logic Input for High Side Gate Driver - Phase V |
| 7 | HINW | Logic Input for High Side Gate Driver - Phase W |
| 8 | VCCH | High side IC supply voltage |
| 9 | COM | Logic Ground |
| 10 | LINU | Logic Input for Low Side Gate Driver - Phase U |
| 11 | LINV | Logic Input for Low Side Gate Driver - Phase V |
| 12 | LINW | Logic Input for Low Side Gate Driver - Phase W |
| 13 | VCCL | Low side IC supply voltage |
| 14 | VFO | Fault output / Temperature monitor |
| 15 | CSC | External capacitance, Over current shutdown input |
| 16 | COM | Logic Ground |
| 17 | VOT | Output for Temperature Sensing |
| 18 | NW | Phase W Low Side Emitter |
| 19 | NV | Phase V Low Side Emitter |
| 20 | NU | Phase U Low Side Emitter |
| 21 | W | Output - Phase W, High Side Floating Supply Offset W |
| 22 | V | Output - Phase V, High Side Floating Supply Offset V |
| 23 | U | Output - Phase U, High Side Floating Supply Offset U |
| 24 | P | DC Bus Voltage Positive |
| 25 | NC | Not Connected |

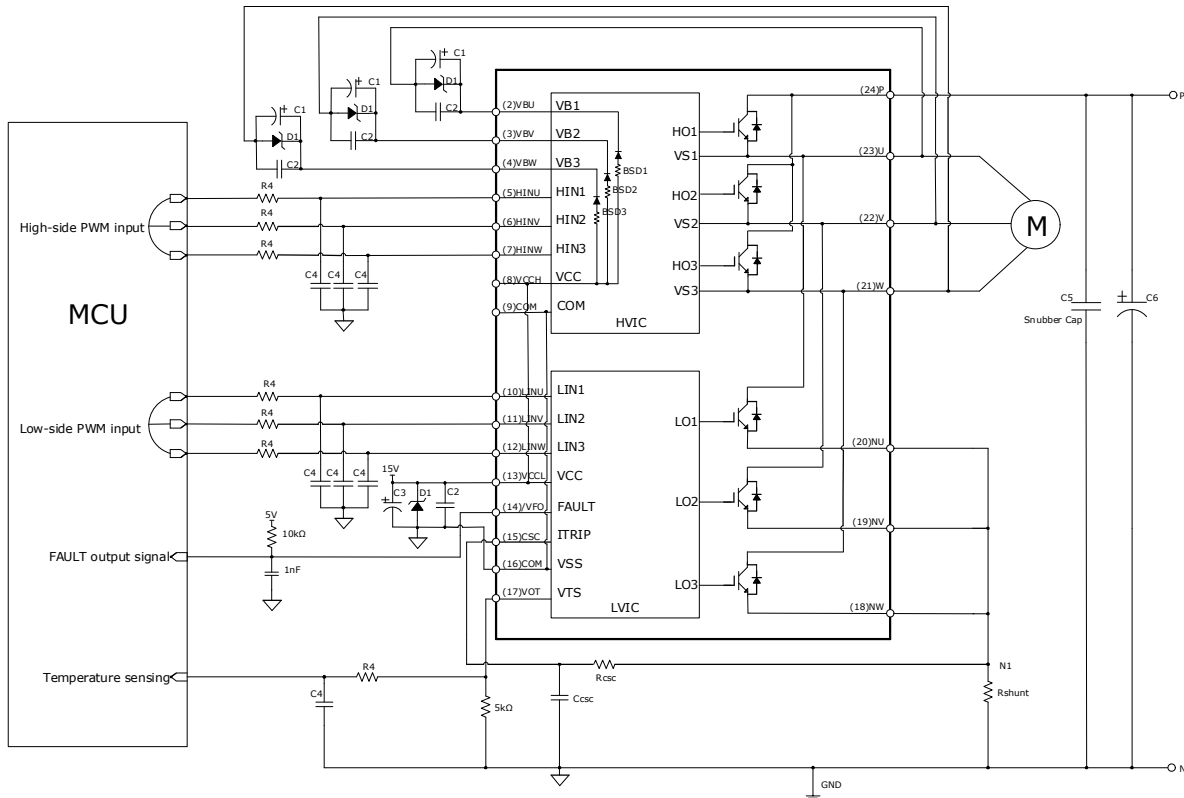Application Circuit




Remark:

- 1、 To prevent malfunction, the wiring of each input should be as short as possible.
- 2、 Input drive is High-Active type. There is a 5kΩ (typ.) pull-down resistor integrated in the IC input circuit. And adding RC filter circuit to the input will prevent the surge noise caused by incorrect input.
- 3、 To prevent surge damage, it is recommended to add a high-frequency non-inductive flat capacitor (0.1uF to 0.22uF) between P and N. The cable connection of the capacitor should be as short as possible.
- 4、 The line between the current detection resistor and the IPM should be as short as possible, otherwise the large surge voltage generated by the connecting inductor may cause damage.
- 5、 All capacitors should be mounted as close to the terminals of the IPM as possible.
- 6、 FO output is open drain type. It should be pulled up to the positive side of 5V power supply by a resistor of about 10kΩ.
- 7、 The time constant Rsc and Csc of the protection circuit should be selected in the range of 1.5-2.0 μs.

Package Outline

DIP-24L

UNIT:mm

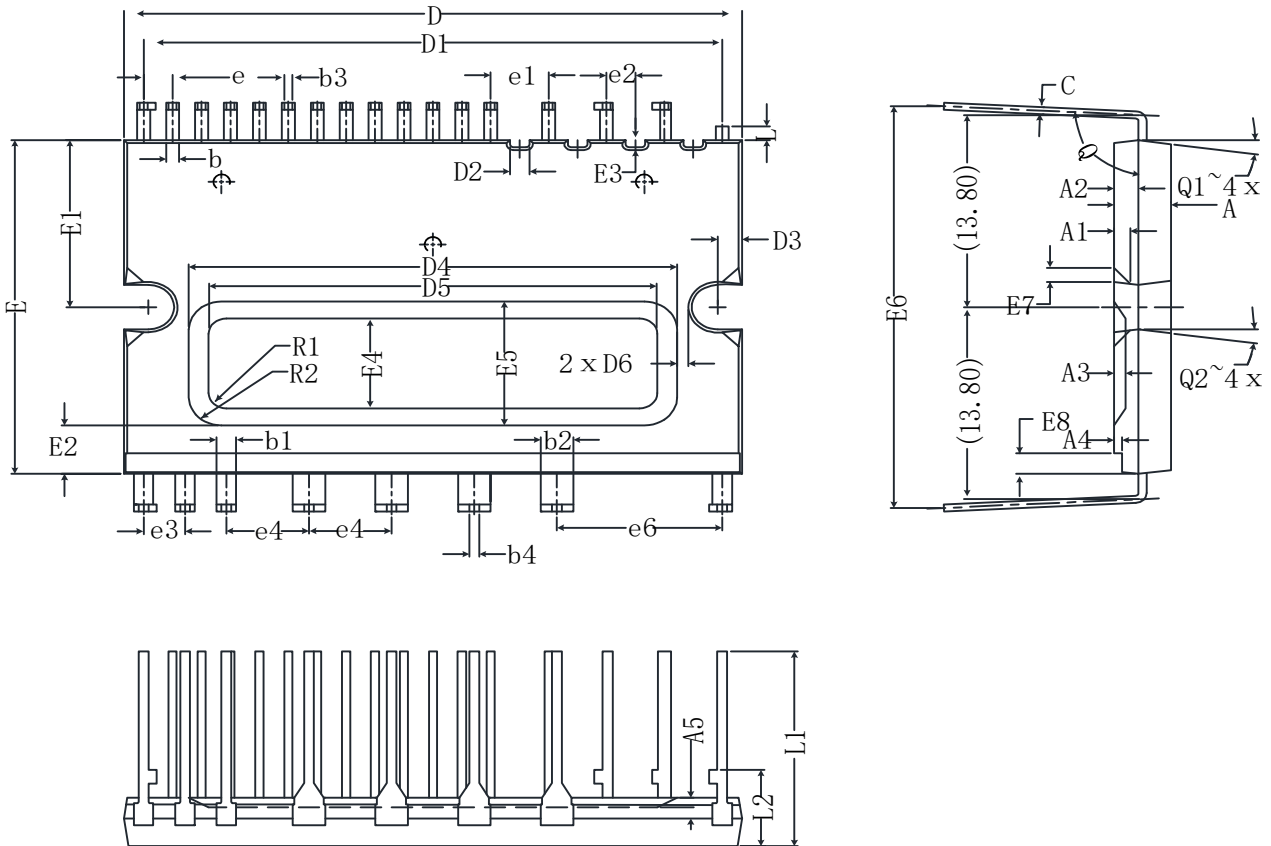

| SYMBOL | COMMON | | | SYMBOL | COMMON | | |
|--------|-----------------------|-------|-------|--------|-----------------------|-------|-------|
| | Dimensions millimeter | | | | Dimensions millimeter | | |
| | Min | Nom | Max | | Min | Nom | Max |
| A | 3.35 | 3.50 | 3.65 | E2 | 3.35 | 3.50 | 3.65 |
| A1 | 0.85 | 1.00 | 1.15 | E3 | 0.35 | 0.50 | 0.65 |
| A2 | 1.35 | 1.50 | 1.65 | E4 | 6.33 | 6.48 | 6.63 |
| A3 | 0.55 | 0.70 | 0.85 | E5 | 8.75 | 8.90 | 9.05 |
| A4 | 0.35 | 0.50 | 0.65 | E6 | 28.40 | 28.90 | 29.40 |
| A5 | 0.55 | 0.70 | 0.85 | E7 | 0.85 | 1.00 | 1.15 |
| b | 0.74 | 0.83 | 0.92 | E8 | 1.35 | 1.50 | 1.65 |
| b1 | 1.14 | 1.23 | 1.32 | e | 1.728 | 1.778 | 1.828 |
| b2 | 1.94 | 2.03 | 2.12 | e1 | 3.506 | 3.556 | 3.606 |
| b3 | 0.44 | 0.53 | 0.62 | e2 | 1.728 | 1.778 | 1.828 |
| b4 | 0.54 | 0.63 | 0.72 | e3 | 2.490 | 2.540 | 2.590 |
| C | 0.426 | 0.516 | 0.606 | e4 | 5.030 | 5.080 | 5.130 |
| D | 37.85 | 38.00 | 38.15 | e5 | 5.030 | 5.080 | 5.130 |
| D1 | 35.41 | 35.56 | 35.71 | e6 | 10.11 | 10.16 | 10.21 |
| D2 | 1.05 | 1.20 | 1.35 | L | 0.91 | 1.00 | 1.09 |
| D3 | 1.35 | 1.50 | 1.65 | L1 | 13.80 | 14.00 | 14.20 |
| D4 | 29.85 | 30.00 | 30.15 | L2 | 5.40 | 5.50 | 5.60 |
| D5 | 27.43 | 27.58 | 27.73 | Q | 90° | 92.5° | 95° |
| D6 | 0.64 | 0.69 | 0.74 | Q1 | 7° | 8° | 9° |
| E | 23.85 | 24.00 | 24.15 | Q2 | 7° | 8° | 9° |
| E1 | 11.85 | 12.00 | 12.15 | | | | |