



200mA Low-Dropout Linear voltage regulator

CST9001 Features

- Low Power Consumption: 1.0uA (Typ)
- Maximum Output Current: 200mA
- Small Dropout Voltage
150mV@100mA (Vout=3.3V)
240mV@100mA (Vout=1.8V)
- Input Voltage Range: 1.5V~6.5V
- Output Voltage Range: 0.9V~5.0V
(customized on command in 0.1V steps)
- RoHS Compliant and Lead (Pb) Free
- High Accurate: $\pm 2\%$
($\pm 1\%$ customized)
- Output Current Limit
- Integrated Short-Circuit Protection
- Good Transient Response
- Stable with Ceramic Capacitor
- Available Package:
SOT23、SOT23-3L
(customized DFN1x1、SOT89-3L)


CST9001 Application

- Battery Powered equipment
- Reference Voltage Source
- Power Management of MP3, PDA.....
- Weighting Scales

CST9001 Description

CST9001 series is a group of positive voltage output, low power consumption, low dropout voltage, Linear voltage regulator. It can provide 100mA output current when input / output voltage differential dropsto 150mV (Vout=3.3V) , The very low power consumption of CST9001 (Iq=1.0uA) can greatly improve natural life of batteries.CST9001 can provide output value in the range of 0.9V~5.0V in 0.1V steps. It also can customized on command.CST9001 includes high accuracy voltage reference, error amplifier, current limit circuit and output driver module.CST9001 has well load transient response and good temperature characteristic, And it uses trimming technique to guarantee output voltage accuracy within $\pm 2\%$.


CST9001 Application Circuits

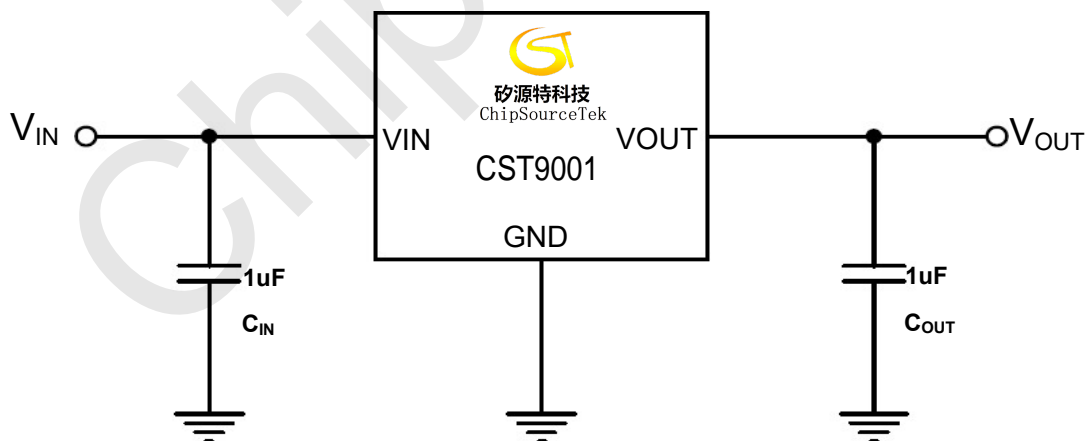



200mA Low-Dropout Linear voltage regulator

CST9001 Pin Configuration

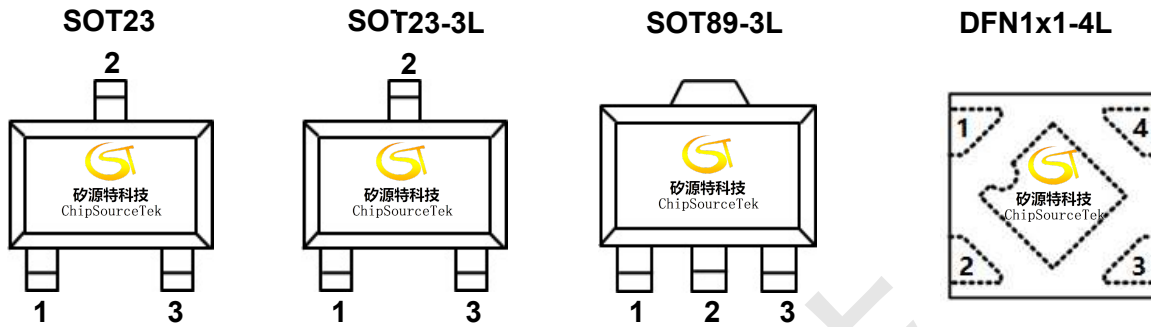

CST9001 Pin Description

Pin No.				Pin Name	Pin Function
SOT23	SOT23-3L	SOT89-3L	DFN1x1-4L		
1	1	1	2	GND	Ground.
2	2	2	4	VIN	Supply voltage input.
3	3	3	1	VOUT	Voltage Output.
----	----	----	3	NC	No Internal Connection.

CST9001 Order Information

CST9001①②-③④⑤

Designator	Symbol	Description
①②	M3/S3/P3/D4	SOT23 / SOT23-3L / SOT89-3L / DFN1x1-4L
③④	Integer	Output Voltage(09、10、12、15、18、25、28、30、33、36..)
⑤	A	Accurate $\pm 1\%$
	----	Accurate $\pm 2\%$

Model	Marking**	Description	Package	T/R Qty
CST9001M3-XX*	①②③④	CST9001 200mA Low-Dropout Linear voltage regulator	SOT23	3,000 PCS
CST9001S3-XX*	①②③④		SOT23-3L	3,000 PCS
CST9001P3-XX*	①②③④		SOT89-3L	1,000 PCS
CST9001D4-XX*	⑤⑥		DFN1x1-4L	10,000 PCS

Note: (*) XX Represents the Output Voltage

(**) Please Page 3 .⑤⑥ Only Off DFN1x1-4L (customized)



200mA Low-Dropout Linear voltage regulator

CST9001 Marking Information

①②Represents the product name

Mark ①②	Product Series
AL	CST9001 M3 / S3 / P3

③Represents the range of output voltage

Mark ③		Product Series
VOUT: 0.9V-3.0V	VOUT: 3.1V-5.0V	CST9001 M3 / S3 / P3
V	E	

④Represents the Output Voltage

Mark④	Output Voltage(V)				Mark④	Output Voltage(V)			
0	-	3.1	-	-	F	1.6	4.6	-	-
1	-	3.2	-	-	H	1.7	4.7	-	-
2	-	3.3	-	-	K	1.8	4.8	-	-
3	-	3.4	-	-	L	1.9	4.9	-	-
4	-	3.5	-	-	M	2.0	5.0	-	-
5	-	3.6	-	-	N	2.1	-	-	-
6	-	3.7	-	-	P	2.2	-	-	-
7	-	3.8	-	-	R	2.3	-	-	--
8	0.9	3.9	-	-	S	2.4	-	-	-
9	1.0	4.0	-	-	T	2.5	-	-	-
A	1.1	4.1	-	-	U	2.6	-	-	-
B	1.2	4.2	-	-	V	2.7	-	-	-
C	1.3	4.3	-	-	X	2.8	-	-	-
D	1.4	4.4	-	-	Y	2.9	-	-	-
E	1.5	4.5	-	-	Z	3.0	-	-	-

Output Voltage(V)	Mark⑤⑥	Output Voltage(V)	Mark⑤⑥	Output Voltage(V)	Mark⑤⑥
0.9	L0	2.3	-	3.7	-
1.0	LK	2.4	-	3.8	-
1.1	L1	2.5	LD	3.9	-
1.2	LA	2.6	-	4.0	-
1.3	L2	2.7	-	4.1	-
1.4	-	2.8	LE	4.2	-
1.5	LB	2.9	-	4.3	-
1.6	-	3.0	LF	4.4	-
1.7	-	3.1	-	4.5	-
1.8	LC	3.2	-	4.6	-
1.9	-	3.3	LG	4.7	-
2.0	L3	3.4	-	4.8	-
2.1	-	3.5	-	4.9	-
2.2	-	3.6	LH	5.0	-



200mA Low-Dropout Linear voltage regulator

CST9001 Absolute Maximum Ratings ⁽¹⁾⁽²⁾

Parameter		Symbol	Maximum Rating	Unit
Input Voltage		V _{IN}	V _{SS} -0.3~V _{SS} +7.0	V
Output Current		I _{OUT}	300	mA
Output Voltage		V _{OUT}	V _{SS} -0.3~V _{IN} +0.3	V
Power Dissipation	SOT23	P _d	200	mW
	SOT23-3		250	
	SOT89-3		500	
	DFN1*1-4		400	
Thermal Resistance	SOT23	R _{θJA} ⁽³⁾ (Junction-to-ambient thermal resistance)	500	°C/W
	SOT23-3		400	°C/W
	SOT89-3		200	°C/W
	DFN1*1-4		250	°C/W
Operating Temperature		T _{opr}	-40~85	°C
Storage Temperature		T _{stg}	-40~125	°C
Soldering Temperature & Time		T _{solder}	260°C, 10s	

Note (1): Exceeding these ratings may damage the device.

Note (2): The device is not guaranteed to function outside of its operating conditions

Note (3): The package thermal impedance is calculated in accordance to JESD 51-7.

CST9001 ESD Ratings

Item	Description	Value	Unit
V _(ESD-HBM)	Human Body Model (HBM) ANSI/ESDA/JEDEC JS-001-2014 Classification, Class: 2	±4000	V
V _(ESD-CDM)	Charged Device Mode (CDM) ANSI/ESDA/JEDEC JS-002-2014 Classification, Class: C0b	±400	V
I _{LATCH-UP}	JEDEC STANDARD NO.78E APRIL 2016 Temperature Classification, Class: I	±400	mA

ESD testing is performed according to the respective JESD22 JEDEC standard. The human body model is a 100 pF capacitor discharged through a 1.5kΩ resistor into each pin. The machine model is a 200pF capacitor discharged directly into each pin.

Recommended Operating Conditions

Parameter	MIN.	MAX.	Units
Supply voltage at V _{IN}	1.5	6.5	V
Operating junction temperature range, T _j	-40	125	°C
Operating free air temperature range, T _A	-40	85	°C

Note : All limits specified at room temperature (T_A = 25°C) unless otherwise specified. All room temperature limits are 100% production tested. All limits at temperature extremes are ensured through correlation using standard Statistical Quality Control (SQC) methods. All limits are used to calculate Average Outgoing Quality Level (AOQL).



200mA Low-Dropout Linear voltage regulator

CST9001 Electrical Characteristics

(Test Conditions: $C_{IN}=1\mu F$, $C_{OUT}=1\mu F$, $T_A=25^\circ C$, unless otherwise specified.)

Parameter	Symbol	Conditions	Min	Typ	Max	Units	
Input Voltage	V_{IN}		-0.3		6.5	V	
Quiescent Current	I_Q	$V_{OUT} \leq V_{IN} \leq V_{set}^{(1)}$ $I_{LOAD}=0mA$	—	1.0	—	μA	
Output Voltage	V_{OUT}	$V_{IN}=V_{set}+1.0V$ $I_{OUT}=30mA$	$V_{set} \cdot 0.98$	V_{set}	$V_{set} \cdot 1.02$	V	
Maximum Output Current	$I_{OUT(Max)}$	$V_{IN}=V_{OUT}+1.0V$	200 ⁽²⁾	—	—	mA	
Dropout Voltage	V_{DROP}	$I_{OUT}=100mA$	$V_{OUT}=0.9V$	—	700	—	mV
			$V_{OUT}=1.2V$	—	600	—	
			$V_{OUT}=1.5V$	—	380	—	
			$V_{OUT}=1.8V$	—	240	—	
			$V_{OUT}=2.5V$	—	240	—	
			$V_{OUT}=2.8V$	—	220	—	
			$V_{OUT}=3.0V$	—	200	—	
			$V_{OUT}=3.3V$	—	150	—	
			$V_{OUT}=3.6V$	—	130	—	
		$V_{OUT}=5.0V$	—	120	—		
Line Regulation	$\frac{\Delta V_{OUT}}{\Delta V_{IN} \cdot V_{OUT}}$	$I_{OUT}=30mA$ $(V_{set}+1.0V) \leq V_{IN} \leq 7.0V$	—	0.05	—	%/V	
Load Regulation	ΔV_{OUT}	$V_{IN}=V_{set}+1.0V$ $1mA \leq I_{OUT} \leq 100mA$	—	15	—	mV	
Short Current	I_{SHORT}	$V_{IN}=V_{set}+1.0V$ $V_{OUT}=GND$	—	50	—	mA	
Current Limit	I_{LIMIT}		—	300	—	mA	
Output Voltage Temperature Coefficient	$\frac{\Delta V_{OUT}}{\Delta T \cdot V_{OUT}}$	$I_{OUT}=10mA$	—	100	—	ppm/ $^\circ C$	


NOTE:(1) CST9001 keeps the chip low power when the input voltage is low

(2) $I_{OUT}=P_d / (V_{IN}-V_{OUT})$



200mA Low-Dropout Linear voltage regulator

CST9001 Function Block Diagram

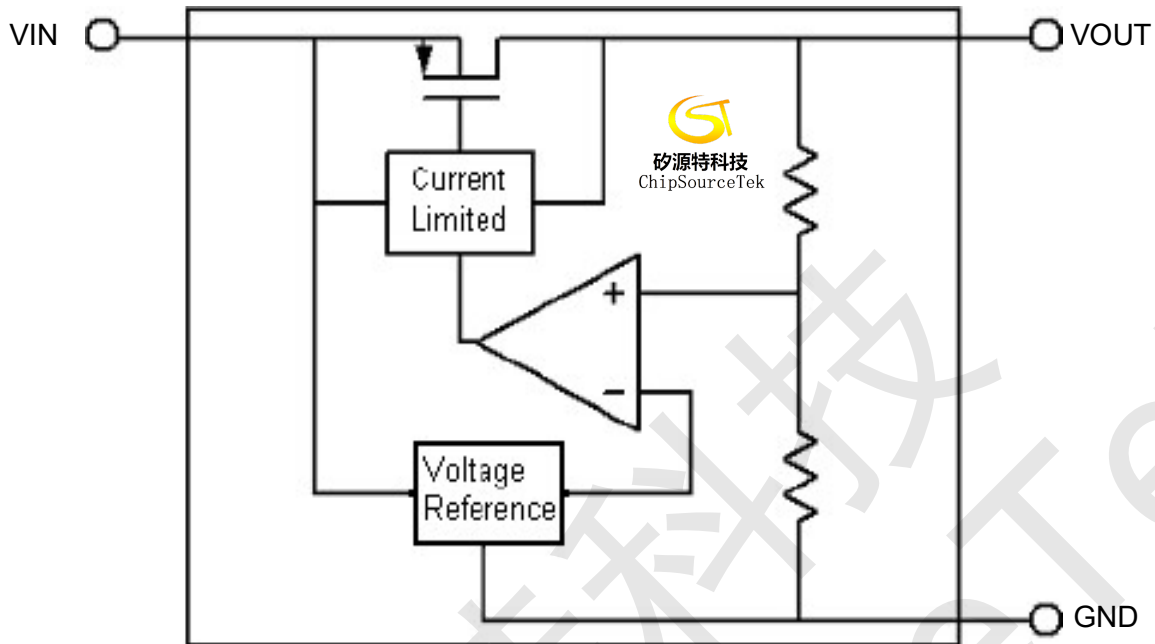

CST9001 Application Guideline

Input Capacitor

A 1 μ F ceramic capacitor is recommended to connect between V_{DD} and GND pins to decouple input power supply glitch and noise. The amount of the capacitance may be increased without limit. This input capacitor must be located as close as possible to the device to assure input stability and less noise. For PCB layout, a wide copper trace is required for both VIN and GND.

Output Capacitor

An output capacitor is required for the stability of the LDO. The recommended output capacitance is 1 μ F, ceramic capacitor is recommended, and temperature characteristics are X7R or X5R. Higher capacitance values help to improve load/line transient response. The output capacitance may be increased to keep low undershoot/overshoot. Place output capacitor as close as possible to VOUT and GND pins.

Dropout Voltage

The dropout voltage refers to the voltage difference between the VIN and VOUT pins while operating at specific output current. The dropout voltage V_{DROP} also can be expressed as the voltage drop on the pass-FET at specific output current (I_{RATED}) while the pass-FET is fully operating at ohmic region and the pass-FET can be characterized as a resistance $R_{DS(ON)}$. Thus the dropout voltage



200mA Low-Dropout Linear voltage regulator

can be defined as ($V_{DROP} = V_{IN} - V_{OUT} = R_{DS(ON)} \times I_{RATED}$). For normal operation, the suggested LDO operating range is ($V_{IN} > V_{OUT} + V_{DROP}$) for good transient response and PSRR ability. Vice versa, while operating at the ohmic region will degrade the performance severely.

Thermal Application

For continuous operation, do not exceed the absolute maximum junction temperature. The maximum power dissipation depends on the thermal resistance of the IC package, PCB layout, rate of surrounding airflow, and difference between junction and ambient temperature. The maximum power dissipation can be calculated as below: $T_A=25^{\circ}\text{C}$, PCB,

The max $P_D = (125^{\circ}\text{C} - 25^{\circ}\text{C}) / (\text{Thermal Resistance } ^{\circ}\text{C/W})$

Power dissipation (P_D) is equal to the product of the output current and the voltage drop across the output pass element, as shown in the equation below:

$$P_D = (V_{IN} - V_{OUT}) \times I_{OUT}$$

Layout Consideration


By placing input and output capacitors on the same side of the PCB as the LDO, and placing them as close as is practical to the package can achieve the best performance. The ground connections for input and output capacitors must be back to the CST9001 ground pin using as wide and as short of a copper trace as is practical. Connections using long trace lengths, narrow trace widths, and/or connections through via must be avoided. These add parasitic inductances and resistance that results in worse performance especially during transient conditions.



200mA Low-Dropout Linear voltage regulator

CST9001 Packaging Information

SOT23

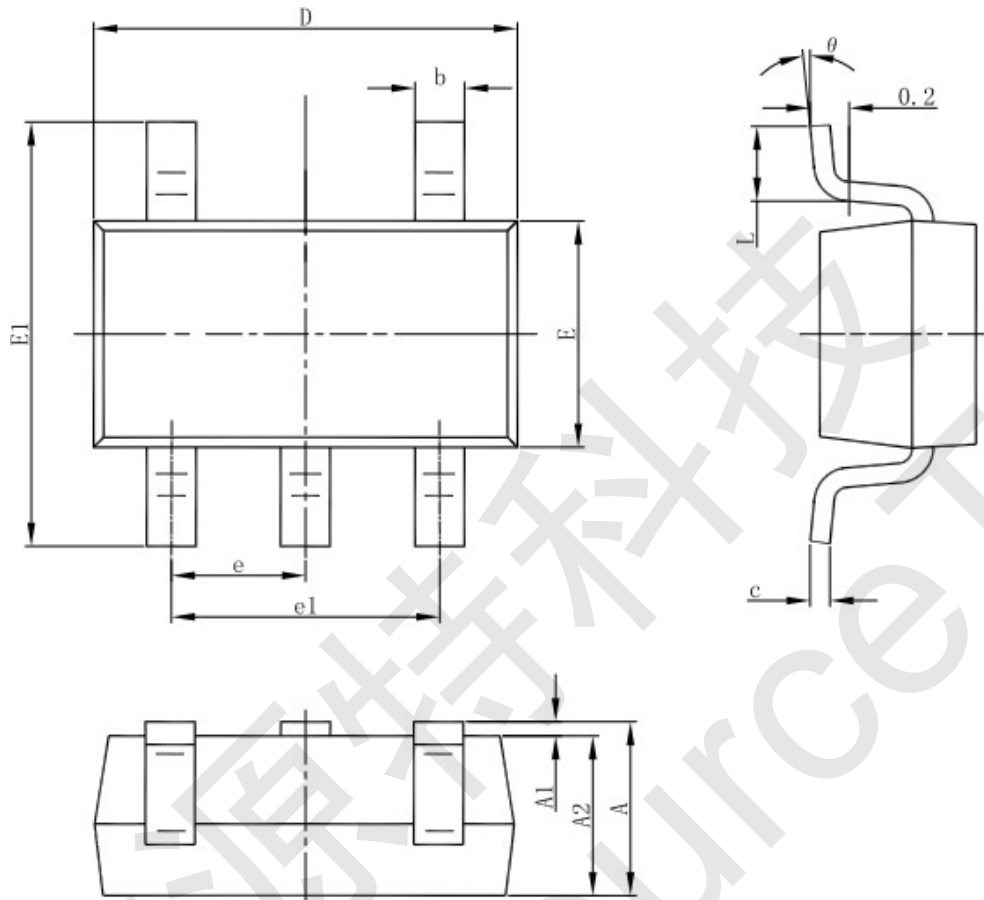


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°



200mA Low-Dropout Linear voltage regulator

CST9001 Packaging Information

SOT23-3L

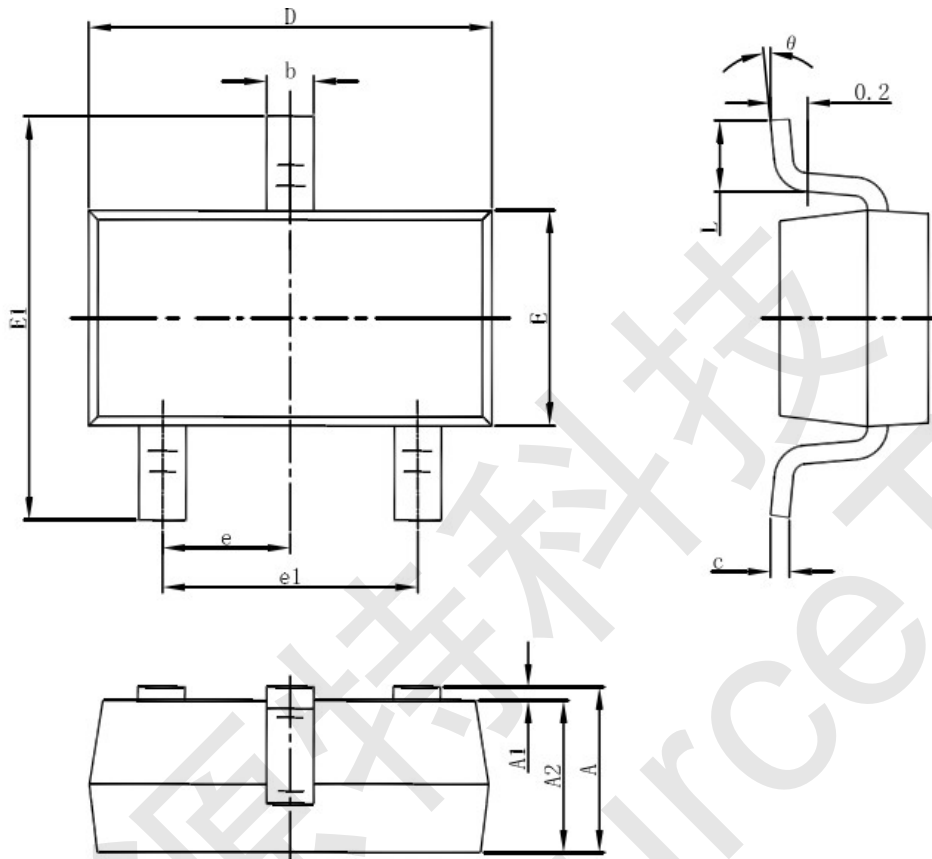


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.650	2.950	0.104	0.116
e	0.950(BSC)		0.037(BSC)	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
θ	0°	8°	0°	8°



200mA Low-Dropout Linear voltage regulator

CST9001 Packaging Information

SOT89-3L

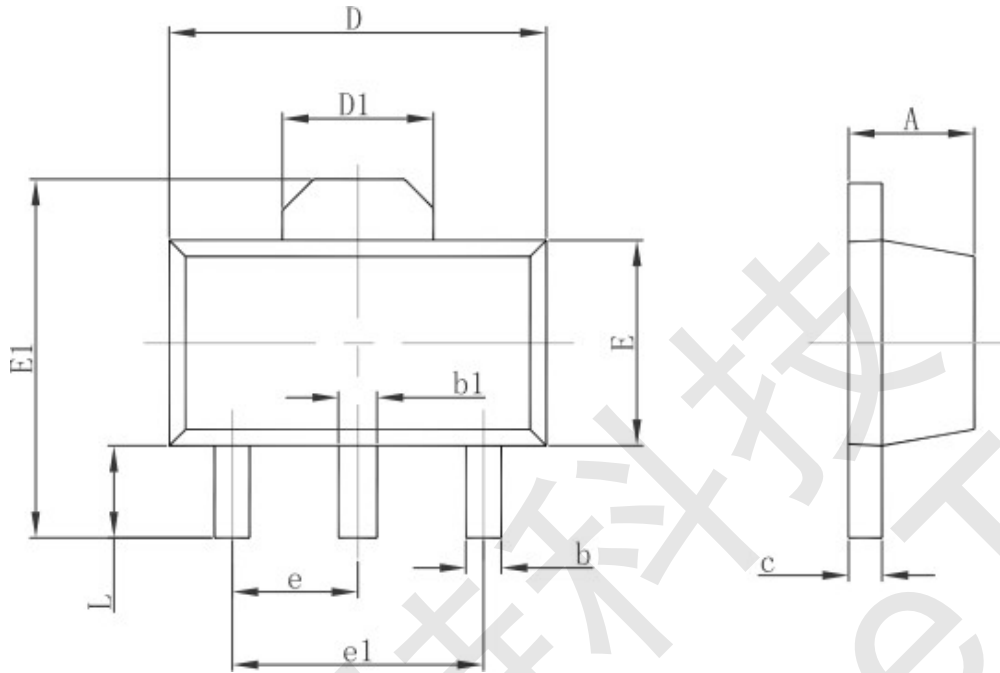


Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min.	Max.	Min.	Max.
A	1.400	1.600	0.055	0.063
b	0.320	0.520	0.013	0.020
b1	0.400	0.580	0.016	0.023
c	0.350	0.440	0.014	0.017
D	4.400	4.600	0.173	0.181
D1	1.550 REF.		0.061 REF.	
E	2.300	2.600	0.091	0.102
E1	3.940	4.250	0.155	0.167
e	1.500 TYP.		0.060 TYP.	
e1	3.000 TYP.		0.118 TYP.	
L	0.900	1.200	0.035	0.047





200mA Low-Dropout Linear voltage regulator

CST9001 Packaging Information

DFN1x1-4L

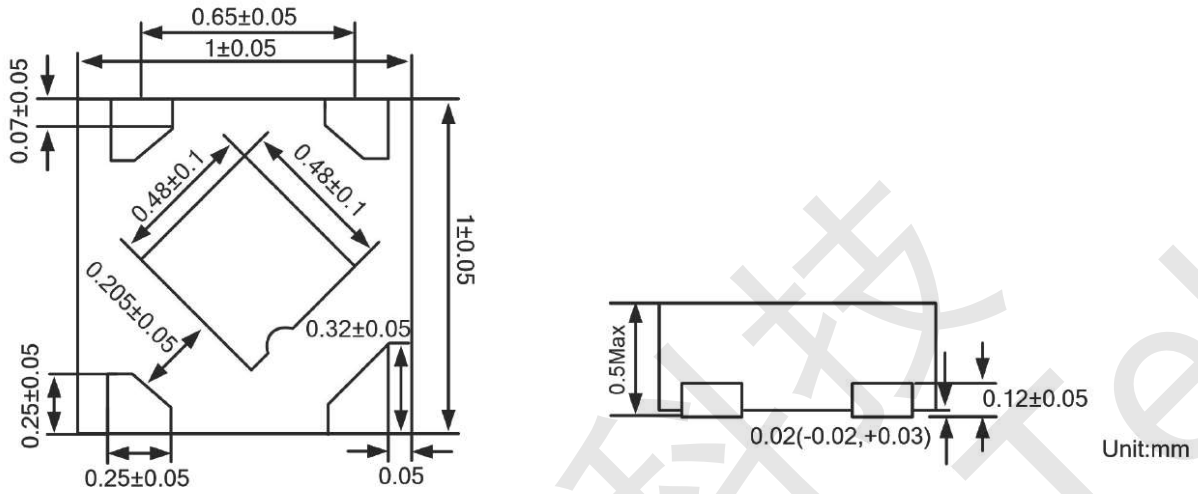

Detail A: (PIN1 shape)



Unit:mm