

**isc Silicon NPN Darlington Power Transistor**

**2SD689**

**DESCRIPTION**



- High DC Current Gain-  
:  $h_{FE} = 1000(\text{Min})@ I_C = 1A$
- Collector-Emitter Sustaining Voltage-  
:  $V_{CEO(\text{SUS})} = 100V(\text{Min})$
- Low Collector-Emitter Saturation Voltage-  
:  $V_{CE(\text{sat})} = 1.5V(\text{Max})@ I_C = 1A$
- Complement to Type 2SB679

**APPLICATIONS**

- Low frequency medium power amplifier and medium speed switching applications.
- Pulse motor driver, relay drive and hammer drive applications.

**ABSOLUTE MAXIMUM RATINGS (T<sub>a</sub>=25°C)**

SYMBOL	PARAMETER	VALUE	UNIT
V <sub>CBO</sub>	Collector-Base Voltage	100	V
V <sub>CEO</sub>	Collector-Emitter Voltage	100	V
V <sub>EBO</sub>	Emitter-Base Voltage	10	V
I <sub>C</sub>	Collector Current-Continuous	1.5	A
P <sub>C</sub>	Collector Power Dissipation T <sub>C</sub> =25°C	10	W
T <sub>j</sub>	Junction Temperature	150	°C
T <sub>stg</sub>	Storage Temperature Range	-55~150	°C

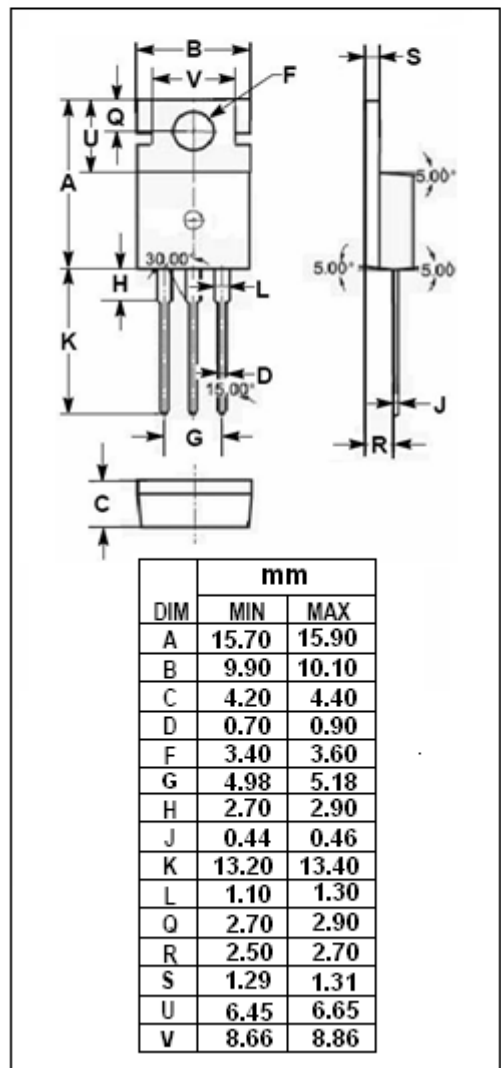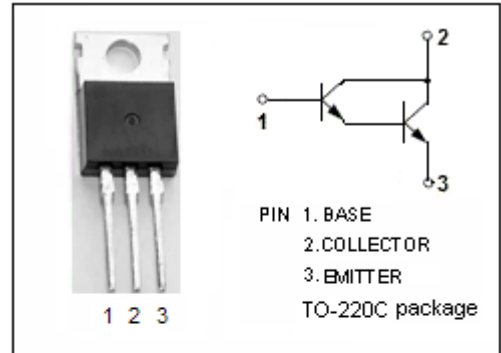

## isc Silicon NPN Darlington Power Transistor

2SD689

## ELECTRICAL CHARACTERISTICS

 $T_C=25^{\circ}\text{C}$  unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-Emitter Breakdown Voltage	$I_C=10\text{mA}; I_B=0$	100			V
$V_{(BR)EBO}$	Emitter-Base Breakdown Voltage	$I_E=5\text{mA}; I_C=0$	10			V
$V_{CE(sat)}$	Collector-Emitter Saturation Voltage	$I_C=1\text{A}, I_B=2\text{mA}$			1.5	V
$V_{BE(sat)}$	Base-Emitter Saturation Voltage	$I_C=1\text{A}, I_B=2\text{mA}$			2.5	V
$I_{CBO}$	Collector Cutoff Current	$V_{CB}=100\text{V}, I_E=0$			10	$\mu\text{A}$
$I_{EBO}$	Emitter Cutoff Current	$V_{EB}=10\text{V}; I_C=0$			10	$\mu\text{A}$
$h_{FE-1}$	DC Current Gain	$I_C=0.1\text{A}; V_{CE}=2\text{V}$	2000			
$h_{FE-2}$	DC Current Gain	$I_C=1\text{A}; V_{CE}=2\text{V}$	1000			

## Switching Times

$t_{on}$	Turn-On Time	$I_{B1}=-I_{B2}=2\text{mA}; V_{CC}=30\text{V}$ $R_L=30\Omega; P_W=20\mu\text{s};$ Duty Cycle $\leq 1\%$		0.3		$\mu\text{s}$
$t_s$	Storage Time			2.0		$\mu\text{s}$
$t_f$	Fall Time			0.7		$\mu\text{s}$