
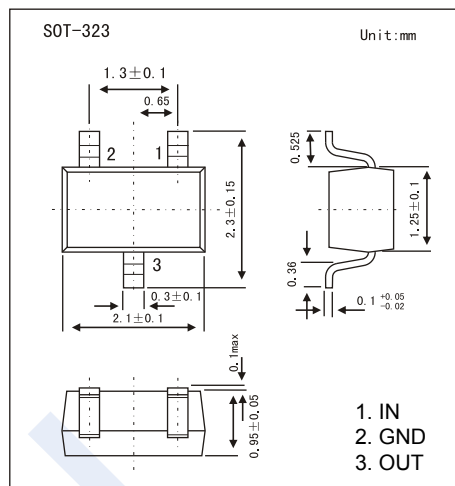



Digital Transistors

DTA123YUA (KDTA123YUA)

■ Features

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors(see equivalent circuit)
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input.They also have the advantage of almost completely eliminating parasitic effects
- Only the on/off conditions need to be set for operation, making device design easy



■ Absolute Maximum Ratings Ta = 25°C

Parameter	Symbol	Rating	Unit
Supply Voltage	V _{CC}	-50	V
Input Voltage	V _{IN}	-12~+5	
Output Current	I _O	-100	mA
Power Dissipation	P _D	200	mW
Junction Temperature	T _J	150	°C
Storage Temperature range	T _{stg}	-55 to 150	

■ Electrical Characteristics Ta = 25°C

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input voltage	V _{I(off)}	V _{CC} = -5 V , I _O = -100 uA	-0.3			V
	V _{I(on)}	V _O = -0.3 V , I _O = -20 mA			-3	
Output voltage	V _{O(on)}	I _O = -10 mA , I _I = -0.5 mA			-0.3	
Input current	I _I	V _I = -5 V			-3.8	mA
Output current	I _{O(off)}	V _{CC} = -50 V , V _I = 0			-0.5	uA
DC current gain	G _I	V _O = -5V, I _O = -10mA	33			
Input resistance	R _I		1.54	2.2	2.86	KΩ
Resistance ratio	R ₂ /R ₁		3.6	4.5	5.5	
Transition frequency	f _T	V _O = -10V, I _O = -5mA, f=100MHz		250		MHz

■ Marking

Marking	52
---------	----

Digital Transistors

DTA123YUA (KDTA123YUA)

■ Typical Characteristics

