


RoHS Compliant Product
A suffix of "-C" specifies halogen & lead-free

FEATURES

- Built-in bias resistors enable the configuration of an inverter circuit without connecting external input resistors (see equivalent circuit).
- The bias resistors consist of thin-film resistors with complete isolation to allow positive biasing of the input. They also have the advantage of almost completely eliminating parasitic effects.
- Only the on/off conditions need to be set for operation, making device design easy.

EQUIVALENT CIRCUIT

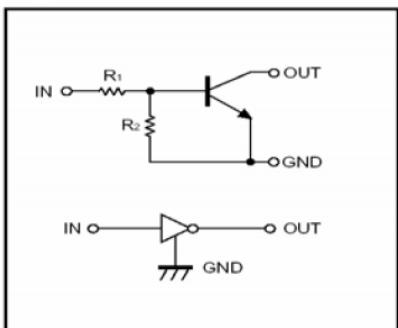

<u>DTC123YE (SOT-523)</u>	<u>DTC123YUA (SOT-323)</u>
 1.IN 2.GND 3.OUT	 1.IN 2.GND 3.OUT
Addreviated symbol : 62	Addreviated symbol : 62
<u>DTC123YCA (SOT-23)</u>	
 1.IN 2.GND 3.OUT	
Addreviated symbol : 62	

ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Limits (DTC123Y□)			Unit
		E	UA	CA	
Supply Voltage	V_{CC}		50		V
Input Voltage	V_{IN}		-5~12		V
Output Current	I_O		100		mA
Power Dissipation	P_D	150		200	mW
Junction and Storage Temperature	T_J, T_{STG}		150, -55~150		°C

ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Min.	Typ.	Max.	Unit	Test Condition
Input Voltage	$V_{I(off)}$	0.3	-	-	V	$V_{CC}=5\text{V}, I_O=100\mu\text{A}$
	$V_{I(on)}$	-	-	3		$V_O=0.3\text{V}, I_O=20\text{mA}$
Output Voltage	$V_{O(on)}$	-	0.1	0.3	V	$I_O/I_I=10\text{mA} / 0.5\text{mA}$
Input Current	I_I	-	-	3.8	mA	$V_I=5\text{V}$
Output Current	$I_O(off)$	-	-	0.5	μA	$V_{CC}=50\text{V}, V_I=0$
DC Current Gain	G_I	33	-	-		$V_O=5\text{V}, I_O=10\text{mA}$
Input Resistance	R_I	1.54	2.2	2.86	KΩ	
Resistance Ratio	R_2 / R_1	3.6	4.5	5.5		
Transition Frequency	f_T	-	250	-	MHz	$V_O=10\text{V}, I_O=5\text{mA}, f=100\text{MHz}$

CHARACTERISTIC CURVES


ON Characteristics

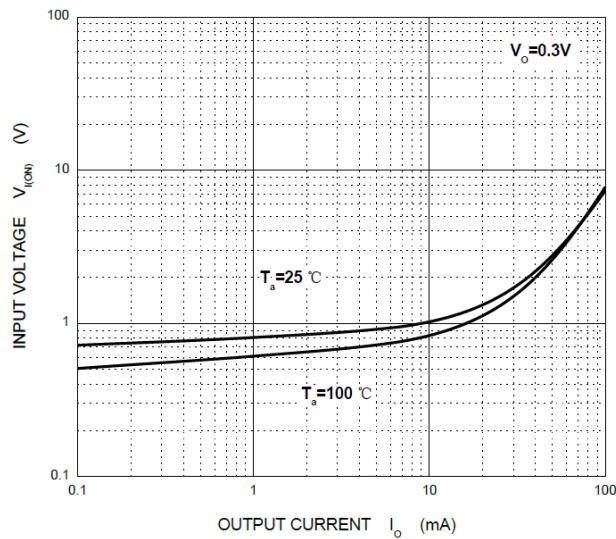


OFF Characteristics

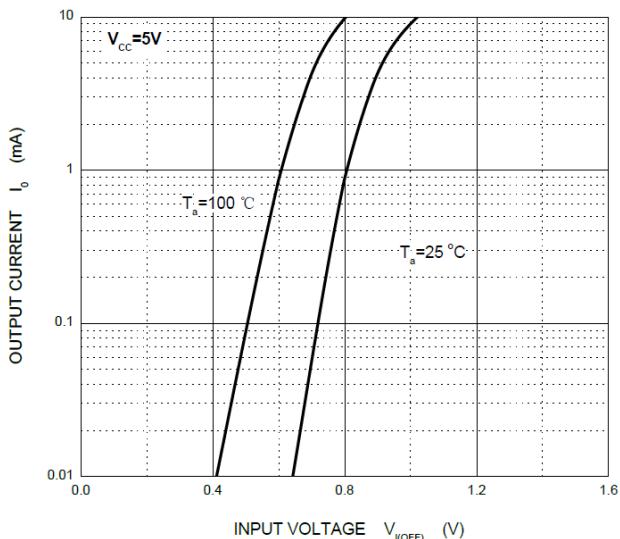


$V_{O(ON)}$ — I_o

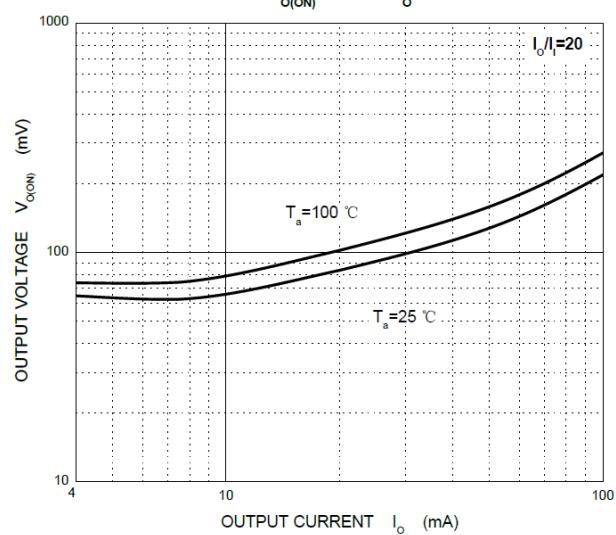

G_i — I_o

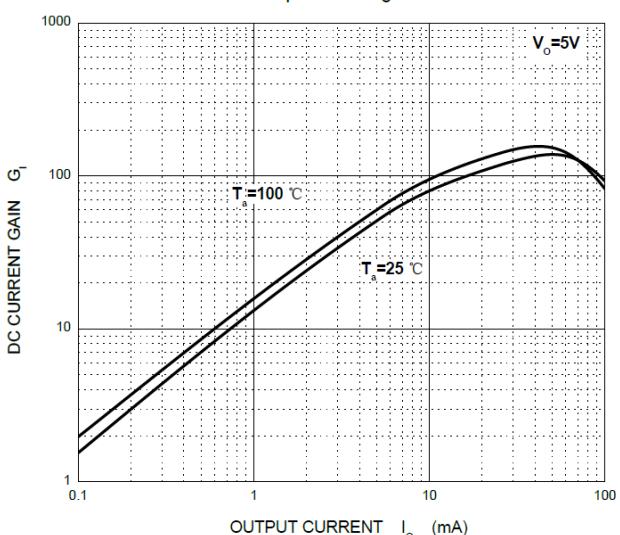

C_o — V_R

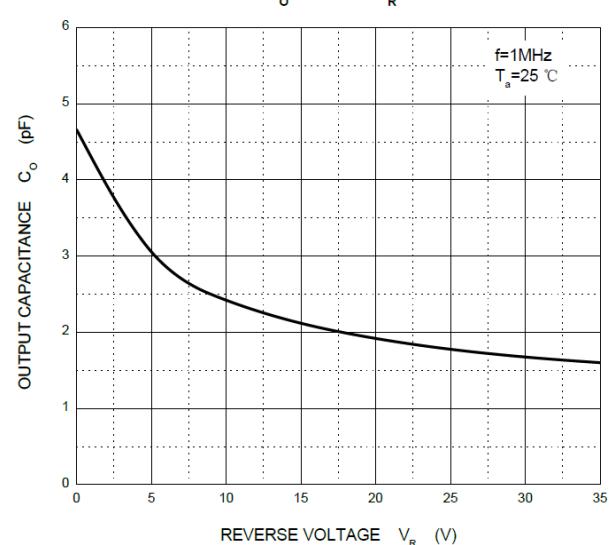

P_d — T_a

