

DW6122-83 SCH

GUANGZHOU ANGUANG

User code choice as follow: (Format:NEC6122)



TEL:020-81600581

2(CRS)pin connect way	Different user codes when 14(CCS) connects to the following pins											
	open/ VDD	3	4	5	6	7	8	9	10	11	12	13
CRS open	FF00	F700	9B44	4008	E31C	E608	2C40	F708	EA15	FF00	9F20	DD72
CRS close	AF50	F608	EF00	A306	FC00	F801	BE41	F70A	9F00	7D02	F508	FC03
CRS+10k Resistor+VSS	FA01	7F08	7689	FA05	E51A	DA6B	F718	0602	7A83	8001	FB06	F906
CRS+24k Resistor+VSS	0F01	3000	BE00	87EE	AB12	DF60	F609	8F30	9FE0	F900	8F80	DB04
CRS+47K Resistor+VSS	946B	AF10	BD00	CF30	F0FF	FA04	6B86	DD01	5500	5F80	DF02	EE11

- Notes: 1.User code: e.g. "EA15":2pin open, 14pin connects 10pin
"DF02":2pin +47K+VSS, 14 pin connects 12 pin.
2.Binary demo e.g: 8F70= 0000 1110 1111 0001B (C0-C15);
code sending order: low level code first;
3.Capacitor close to IC. Resistor error <5%.



open
/VDD

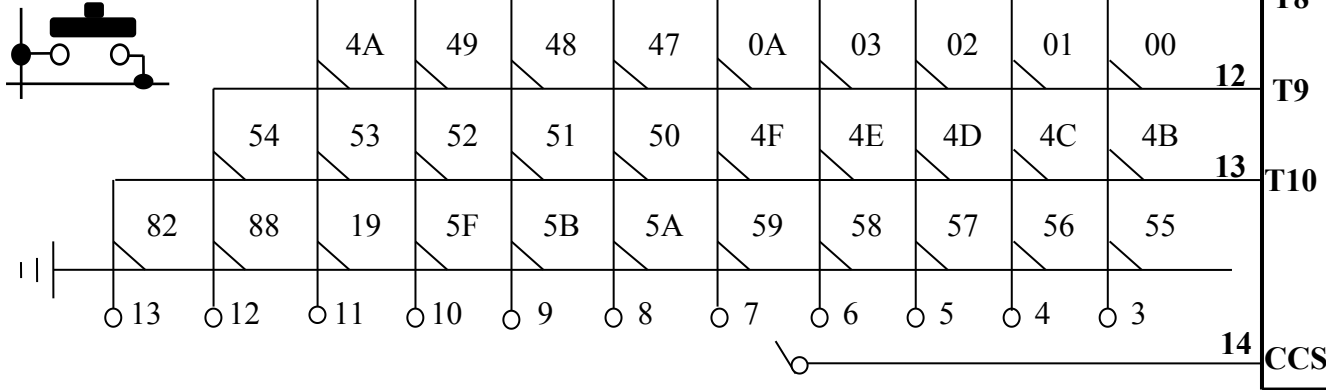

DW6122-83

