

## S.Q. TUBE

Special quality output pentode designed for use in telephone equipment.


### QUICK REFERENCE DATA

Life test	10 000 hours	
Base	Noval. Gold plated pins	
Heating	Indirect a.c. or d.c. Series or parallel supply	
Heater voltage	$V_f$	6.3 V
Heater current	$I_f$	375 mA
Anode current	$I_a$	20 mA
Output power	$W_o$	1 W

### DIMENSIONS AND CONNECTIONS

Dimensions in mm

Base: Noval

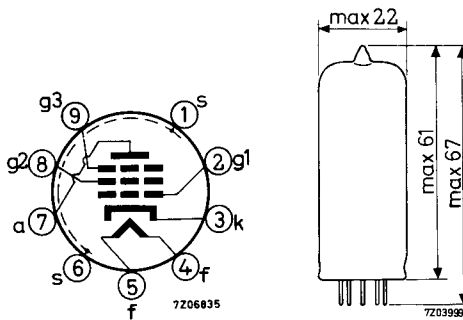

## CHARACTERISTICS

Column I Nominal value or setting of the tube

II Range values for equipment design: Initial spread

III Range values for equipment design: End of life

		I	II	III	
Heater voltage	$V_f$	6.3			V
Heater current	$I_f$	375	355- 395		mA
Anode voltage	$V_a$	210			V
Grid No.3 voltage	$V_{g_3}$	0			V
Grid No.2 voltage	$V_{g_2}$	210			V
Cathode resistor	$R_k$	120			$\Omega$
Anode current	$I_a$	20	17- 23	min. 13.5	mA
Grid No.2 current	$I_{g_2}$	5.3	4.1- 6.5	min. 3.1	mA
Mutual conductance	S	11	9.5-12.5	min. 7.8	mA/V
Internal resistance	$R_i$	0.3	min. 0.2		M $\Omega$
Amplification factor grid No.2 to grid No.1	$\mu_{g_2g_1}$	36			
Equivalent noise resistance	$R_{eq}$	1.2			k $\Omega$
<u>Negative grid current</u>	$-I_{g_1}$		max. 0.5	max. 1.0	$\mu$ A
<u>Hum voltage</u>	$V_{g_1}$		max. 0.2		mV <sub>RMS</sub>
Grid resistor $R_{g_1} = 0.5$ M $\Omega$					
Heater centre earthed					
Cathode resistor bypassed					
<u>Leakage current between cathode and heater</u>	$I_{kf}$		max. 24		$\mu$ A
Voltage between cathode and heater $V_{kf} = 120$ V					

**CAPACITANCES**

	I	II	
Anode to grid No. 3, grid No. 2 cathode heater and screen	$C_{a/g_3g_2kfs}$ 6.5	5.9 - 7.1	pF
Grid No. 1 to grid No. 3, grid No. 2 cathode heater and screen	$C_{g_1/g_3g_2kfs}$ 11.2	10.4 - 12	pF
Grid No. 1 to grid No. 3, grid No. 2 cathode heater and screen Measured with cathode current $I_k = 25$ mA	$C_{g_1/g_3g_2kfs}$ 14.3		pF
Anode to grid No. 1	$C_{ag_1}$	max. 0.02	pF
Grid No. 1 to heater	$C_{g_1f}$	max. 0.2	pF
Cathode to heater	$C_{kf}$ 4.2		pF

**SHOCK AND VIBRATION RESISTANCE**

The following test conditions are applied to assess the mechanical quality of the tube. These conditions are not intended to be used as normal operating conditions.

Shock

The tube is subjected 5 times in each of 4 positions to an acceleration of 500 g supplied by an NRL shock machine with the hammer lifted over an angle of 30°.

Vibration

The tube is subjected during 32 hours in each of 3 positions to a vibration frequency of 50 Hz with an acceleration of 2.5 g.

**LIFE**

Production samples are tested to be within the end of life values (column III) under the following conditions during 10.000 hours.

Anode voltage	$V_a$	210	V
Grid No. 3 voltage	$V_{g_3}$	0	V
Grid No. 2 voltage	$V_{g_2}$	210	V
Cathode resistor	$R_k$	120	$\Omega$

**LIMITING VALUES** (Design centre rating system)

Anode voltage	$V_{a_0}$	max.	550 V
	$V_a$	max.	210 V
Anode dissipation	$W_a$	max.	4.5 W
Grid No.2 voltage	$V_{g_{2_0}}$	max.	550 V
	$V_{g_2}$	max.	210 V
Grid No.2 dissipation	$W_{g_2}$	max.	1.2 W
Cathode current	$I_k$	max.	30 mA
Grid No.1 resistor:			
automatic bias	$R_{g_1}$	max.	0.5 M $\Omega$
fixed bias	$R_{g_1}$	max.	0.25 M $\Omega$
Voltage between cathode and heater	$V_{kf}$	max.	120 V
Bulb temperature	$t_{bulb}$	max.	170 °C

Heater voltage: The average heater voltage should be 6.3 V. Variations of the heater voltage exceeding the range of 6.0 V to 6.6 V will shorten the tube life. The tolerance of heater current (column II) should be taken into account.


**OPERATING CHARACTERISTICS**Output tube, Class A

Anode voltage	$V_a$	210 V
Grid No.3 voltage	$V_{g_3}$	0 V
Grid No.2 voltage	$V_{g_2}$	210 V
Cathode resistor	$R_k$	120 $\Omega$
Load resistance	$R_{a\sim}$	15 k $\Omega$
Anode current	$I_a$	20 mA
Grid No.2 current	$I_{g_2}$	5.3 mA
Output power	$W_o$	1 W
Total distortion	$d_{tot}$	5 %


**OPERATING CHARACTERISTICS (continued)**

Amplifier


Anode voltage	$V_a$	210 V
Grid No.3 voltage	$V_{g3}$	0 V
Grid No.2 voltage	$V_{g2}$	210 V
Cathode resistor	$R_k$	180 $\Omega$
Load resistance	$R_{a\sim}$	20 k $\Omega$
Anode current	$I_a$	15 mA
Grid No.2 current	$I_{g2}$	4 mA
Voltage gain	$V_o/V_i$	5.15 N


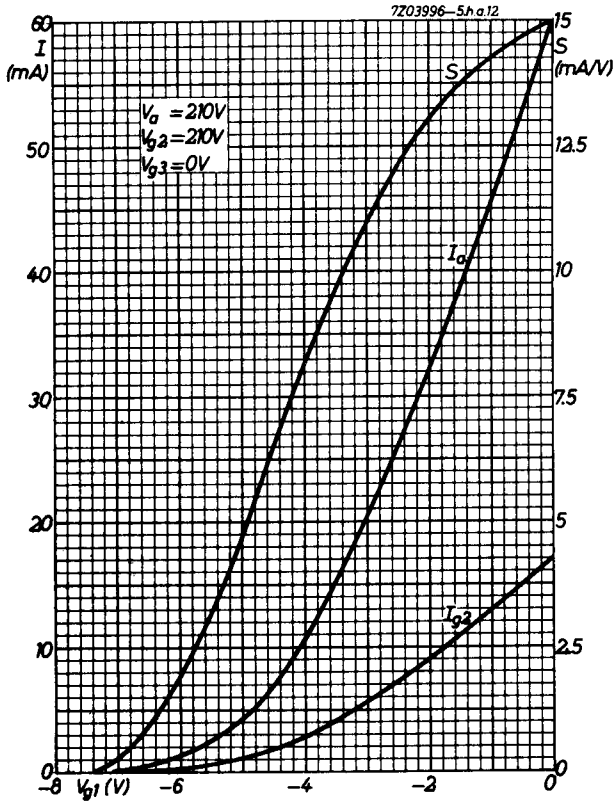



7203993-5.h.a.12

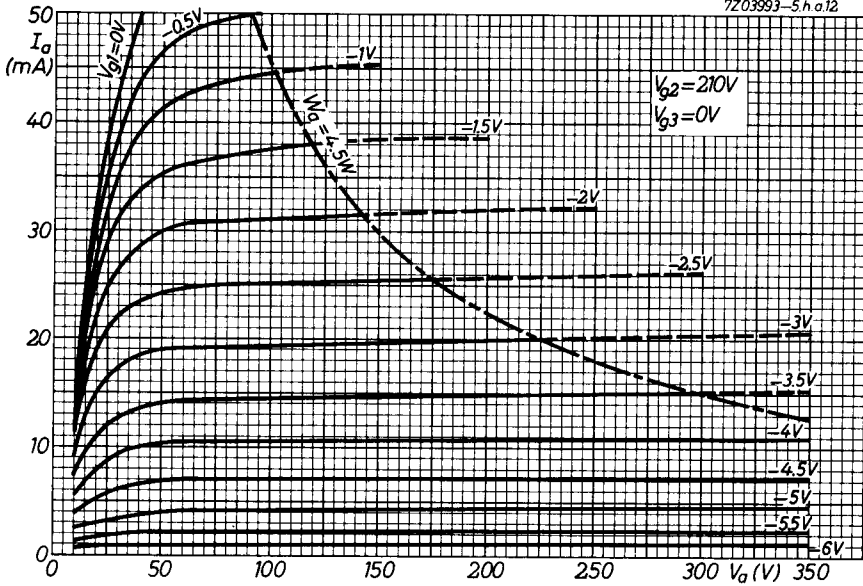

7203995-5.h.a.12

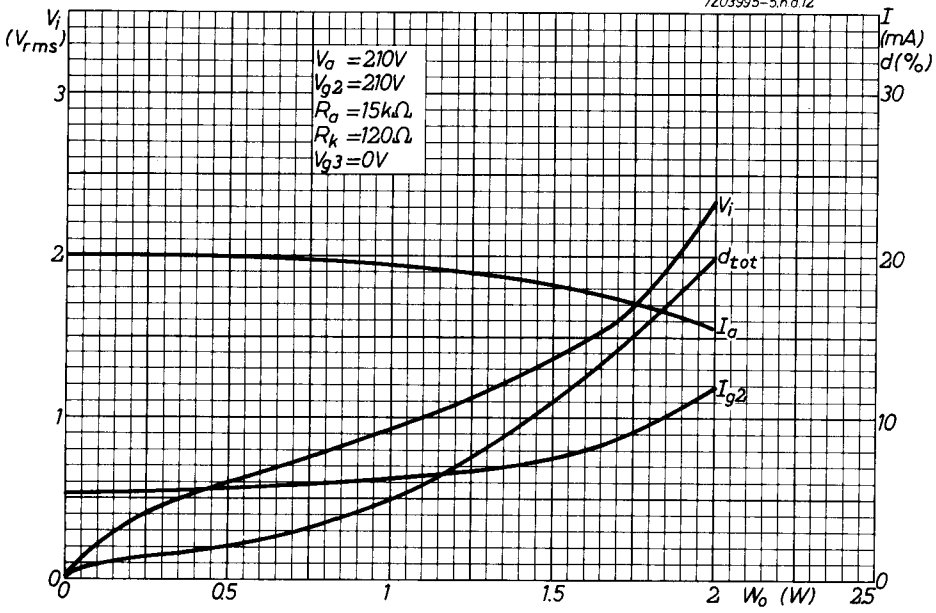

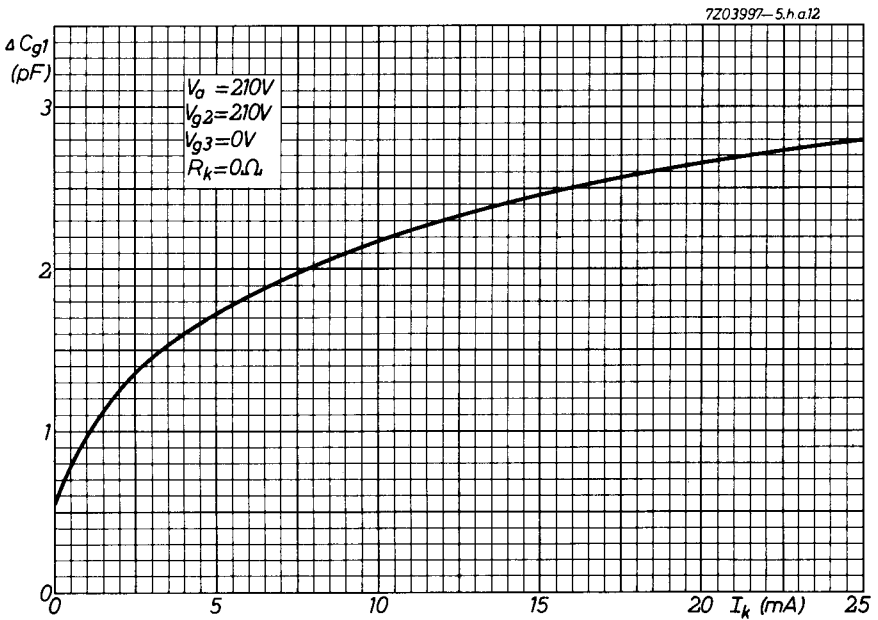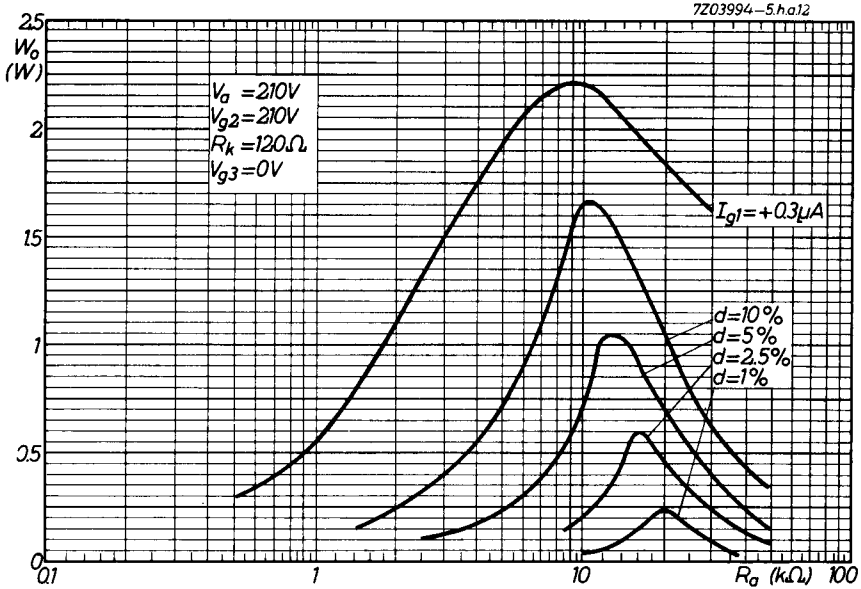

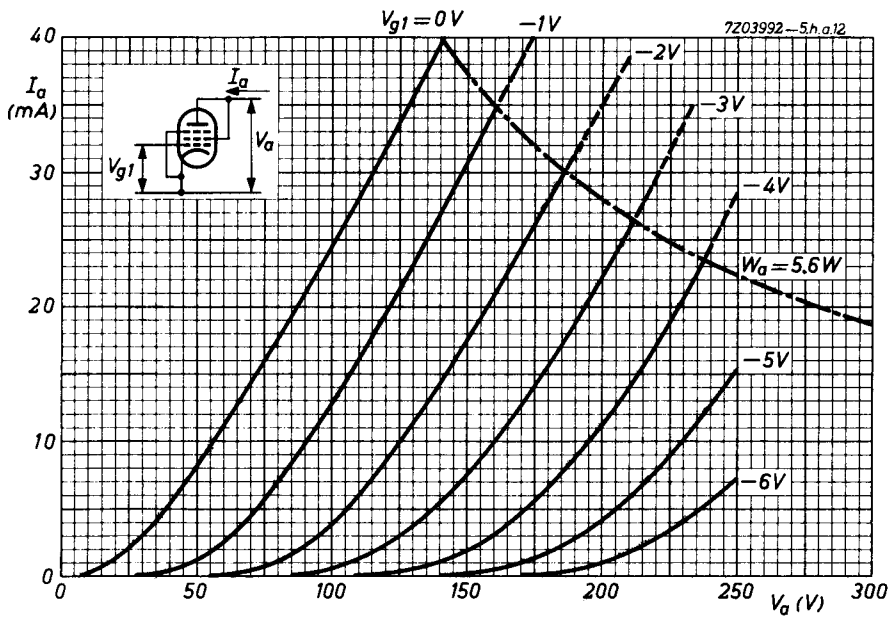



# PHILIPS

Data handbook



Electronic  
components  
and materials

## E81L

<b>page</b>	<b>sheet</b>	<b>date</b>
1	1	1968.12
2	2	1968.12
3	3	1968.12
4	4	1968.12
5	5	1968.12
6	6	1968.12
7	7	1968.12
8	8	1968.12
9	FP	2000.11.17