



DC COMPONENTS CO., LTD.

DISCRETE SEMICONDUCTORS

2SB1426

TECHNICAL SPECIFICATIONS OF PNP EPITAXIAL PLANAR TRANSISTOR

Description


Designed for DC-to-DC converter applications.

Pinning

- 1 = Emitter
- 2 = Collector
- 3 = Base

Absolute Maximum Ratings($T_A=25^{\circ}\text{C}$)

Characteristic	Symbol	Rating	Unit
Collector-Base Voltage	V_{CB0}	-20	V
Collector-Emitter Voltage	V_{CE0}	-20	V
Emitter-Base Voltage	V_{EB0}	-6	V
Collector Current	I_C	-3	A
Total Power Dissipation	P_D	750	mW
Junction Temperature	T_J	+150	$^{\circ}\text{C}$
Storage Temperature	T_{STG}	-55 to +150	$^{\circ}\text{C}$

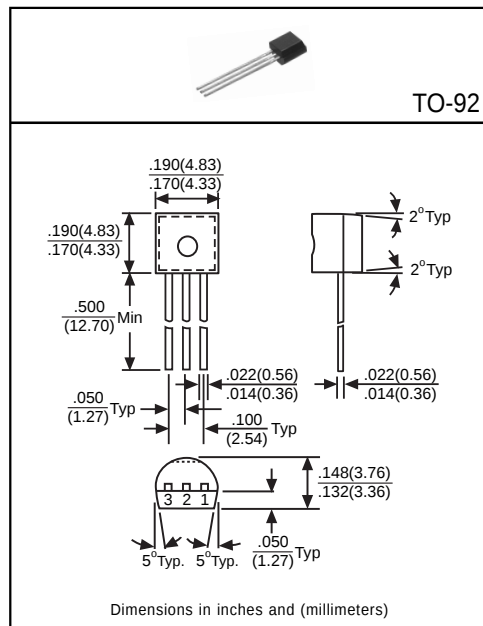

Electrical Characteristics

(Ratings at 25°C ambient temperature unless otherwise specified)

Characteristic	Symbol	Min	Typ	Max	Unit	Test Conditions
Collector-Base Breakdown Voltage	BV_{CB0}	-20	-	-	V	$I_C=-50\mu\text{A}$, $I_E=0$
Collector-Emitter Breakdown Voltage	BV_{CE0}	-20	-	-	V	$I_C=-1\text{mA}$, $I_B=0$
Emitter-Base Breakdown Voltage	BV_{EB0}	-6	-	-	V	$I_E=-10\mu\text{A}$, $I_C=0$
Collector Cutoff Current	I_{C0}	-	-	-100	nA	$V_{CB}=-20\text{V}$, $I_E=0$
Emitter Cutoff Current	I_{E0}	-	-	-100	nA	$V_{EB}=-5\text{V}$, $I_C=0$
Collector-Emitter Saturation Voltage ⁽¹⁾	$V_{CE(sat)}$	-	-	-500	mV	$I_C=-2\text{A}$, $I_B=-0.1\text{A}$
DC Current Gain ⁽¹⁾	h_{FE}	82	-	390	-	$I_C=-100\text{mA}$, $V_{CE}=-2\text{V}$
Transition Frequency	f_T	-	240	-	MHz	$I_C=-500\text{mA}$, $V_{CE}=-2\text{V}$, $f=100\text{MHz}$
Output Capacitance	C_{ob}	-	35	-	pF	$V_{CB}=-10\text{V}$, $f=1\text{MHz}$, $I_E=0$

(1) Pulse Test: Pulse Width $\leq 380\mu\text{s}$, Duty Cycle $\leq 2\%$

Classification of h_{FE}

Rank	P	Q	R
Range	82~180	120~270	180~390