

PENTODE with variable mutual conductance for use as R.F. amplifier, I.F. amplifier and mixer in car radio sets. The tube can directly be operated from a 6 V or 12 V storage battery

PENTHODE à pente variable pour l'utilisation comme amplificateur H.F., amplificateur M.F. et comme tube mélangeur dans récepteurs autoradio. On peut faire fonctionner le tube directement d'un accumulateur de 6 V ou de 12 V

PENTODE mit veränderlicher Steilheit zur Verwendung als HF-Verstärker, ZF-Verstärker und als Mischröhre in Autoempfängern. Die Röhre kann direkt von einer 6 V oder 12 V Batterie betrieben werden

Heating : indirect. Parallel or series supply

Chauffage: indirect. Alimentation série ou parallèle

Heizung : indirekt. Serien- oder Parallelspeisung


$V_f = 6,3 \text{ V}$

$I_f = 300 \text{ mA}$

Dimensions in mm

Dimensions en mm

Abmessungen in mm

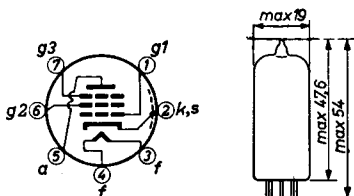

Base, culot, Sockel: MINIATURE

Capacitances

Capacités

Kapazitäten

$C_a = 4 \text{ pF}$

$C_{g1} = 6,5 \text{ pF}$

$C_{ag1} = 0,015 \text{ pF}$

$C_{g1g2} = 3 \text{ pF}$

PENTODE with variable mutual conductance for use as R.F. or I.F. amplifier in carradio sets. The tube can be operated directly from a storage battery


HEATING

Indirect; series or parallel supply


Heater voltage $V_f = 6.3 \text{ V}$

Heater current $I_f = 0.3 \text{ A}$

Dimensions in mm



Base: MINIATURE



CAPACITANCES

Grid No.1 to all other elements except anode $C_{g1} = 6.2 \text{ pF}$

Anode to all other elements except grid No.1 $C_a = 3.8 \text{ pF}$

Anode to grid No.1 $C_{ag1} = 0.015 \text{ pF}$

Grid No.1 to grid No.2 $C_{g1g2} = 3.0 \text{ pF}$

OPERATING CHARACTERISTICS for use as R.F. or I.F. amplifier

Anode voltage	$V_a =$	25	12.6	6.3 V
Grid No.3 voltage	$V_{g3} =$	0	0	0 V
Grid No.2 voltage	$V_{g2} =$	6.3	6.3	3.2 V
Grid No.1 voltage	$V_{g1} =$	-0.85	-0.85	-0.85 V
Anode current	$I_a =$	2.7	2.5	0.8 mA
Grid No.2 current	$I_{g2} =$	0.8	0.9	0.3 mA
Mutual conductance	$S =$	1.9	1.8	0.9 mA/V
Internal resistance	$R_i =$	60	120	60 k Ω
Equivalent noise resistance	$R_{eq} =$	5	5.5	8 k Ω
{ Grid No.1 voltage	$V_{g1} =$	-3.3	-3.3	-2.6 V
{ Mutual conductance	$S =$	0.19	0.18	0.09 mA/V
{ Grid No.1 voltage	$V_{g1} =$	-5	-5	-4 V
{ Mutual conductance	$S =$	0.095	0.09	0.045 mA/V

Operating characteristics as R.F. or I.F. amplifier
Caractéristiques d'utilisation comme amplificateur H.F.
ou M.F.

Betriebsdaten als HF- oder ZF-Verstärker

V _a =	25			12,6			V
V _{g2} =	6,3			6,3			V
V _{g3} =	0			0			V
V _{g1} =	-0,7 ¹⁾	-3,5	-5	-0,7 ¹⁾	-3,5	-5	V
I _a =	3,3	-	-	3	-	-	mA
I _{g2} =	0,95	-	-	1,1	-	-	mA
S =	2100	210	105	1900	190	95	μA/V
R ₁ =	50	-	-	150	-	-	kΩ
Req =	5	-	-	5,5	-	-	kΩ

V _a =	12,6			6,3			V
V _{g2} =	3,2			3,2			V
V _{g3} =	0			0			V
V _{g1} =	-0,7 ¹⁾	-2,5	-4	-0,7 ¹⁾	-2,5	-4	V
I _a =	1	-	-	1	-	-	mA
I _{g2} =	0,35	-	-	0,4	-	-	mA
S =	1100	110	55	1000	100	50	μA/V
R ₁ =	200	-	-	70	-	-	kΩ
Req =	7	-	-	8	-	-	kΩ

V _a =	6,3						V
V _{g2} =	1,6						V
V _{g3} =	0						V
V _{g1} =	-0,7 ¹⁾	-2,5	-3,5				V
I _a =	0,4	-	-				mA
I _{g2} =	0,15	-	-				mA
S =	500	50	25				μA/V
R ₁ =	200	-	-				kΩ
Req =	15	-	-				kΩ

¹⁾ Obtained by grid current biasing; R_{g1} = 10 MΩ
Obtenu par moyen de R_{g1} = 10 MΩ
Erhalten mittels R_{g1} = 10 MΩ

→ OPERATING CHARACTERISTICS for use as R.F. or I.F. amplifier
(continued)

Anode voltage	$V_a =$	12.6	6.3 V
Grid No.3 voltage	$V_{g3} =$	0	0 V
Grid No.2 voltage	$V_{g2} =$	3.2	1.6 V
Grid No.1 voltage	$V_{g1} =$	-0.85	-0.85 V
Anode current	$I_a =$	0.85	0.3 mA
Grid No.2 current	$I_{g2} =$	0.28	0.12 mA
Mutual conductance	$S =$	0.95	0.45 mA/V
Internal resistance	$R_i =$	180	180 k Ω
Equivalent noise resistance	$R_{eq} =$	7	15 k Ω
{ Grid No.1 voltage	$V_{g1} =$	-2.6	-2.3 V
{ Mutual conductance	$S =$	0.095	0.045 mA/V
{ Grid No.1 voltage	$V_{g1} =$	-4	-3.5 V
{ Mutual conductance	$S =$	0.047	0.022 mA/V

LIMITING VALUES (Design centre limits)

Anode voltage	$V_a =$ max.	50 V
Anode dissipation	$W_a =$ max.	0.5 W
Grid No.3 voltage	$V_{g3} =$ max.	50 V
Grid No.3 circuit resistance	$R_{g3} =$ max.	5 M Ω
Grid No.2 voltage	$V_{g2} =$ max.	50 V
Grid No.2 dissipation	$W_{g2} =$ max.	0.5 W
Grid No.1 circuit resistance	$R_{g1} =$ max.	22 M Ω
Cathode current	$I_k =$ max.	15 mA
Voltage between heater and cathode	$V_{kf} =$ max.	50 V

Operating characteristics as mixer (R.F. voltage on g₁, oscillator voltage on g₃)

Caractéristiques d'utilisation comme tube mélangeur (tension H.F. à g₁, tension d'oscillateur à g₃)

Betriebsdaten als Mischröhre (HF-Spannung an g₁, Oszillatortension an g₃)

V _a	=	25		12,6	V
V _{g2}	=	6,3		6,3	V
R _{g3}	=	0,1		0,1	MΩ
V _{osc}	=	10		10	V _{eff}
V _{g1}	=	1) -3 -4		1) -3,5 -5	V
I _a	=	1,8 - -		1,3 - -	mA
I _{g2}	=	1,5 - -		1,7 - -	mA
Sc	=	600 60 30		550 55 27,5	μA/V
R _i	=	50 - -		25 - -	kΩ
Req	=	40 - -		40 - -	kΩ

V _a	=	6,3	V
V _{g2}	=	3,2	V
R _{g3}	=	0,1	MΩ
V _{osc}	=	5	V _{eff}
V _{g1}	=	1) -2,5 -3,5	V
I _a	=	0,45 - -	mA
I _{g2}	=	0,6 - -	mA
Sc	=	300 30 15	μA/V
R _i	=	30 - -	kΩ
Req	=	55 - -	kΩ

Limiting values

Caractéristiques limites


Grenzdaten

V _a	= max.	50	V
W _a	= max.	0,5	W
V _{g2}	= max.	50	V
W _{g2}	= max.	0,5	W
V _{g3}	= max.	50	V
I _k	= max.	15	mA
R _{g1}	= max.	22	MΩ
R _{g3}	= max.	5	MΩ
V _{kf}	= max.	50	V

1) See page 2; voir page 2; siehe Seite 2

PHILIPS

EF97

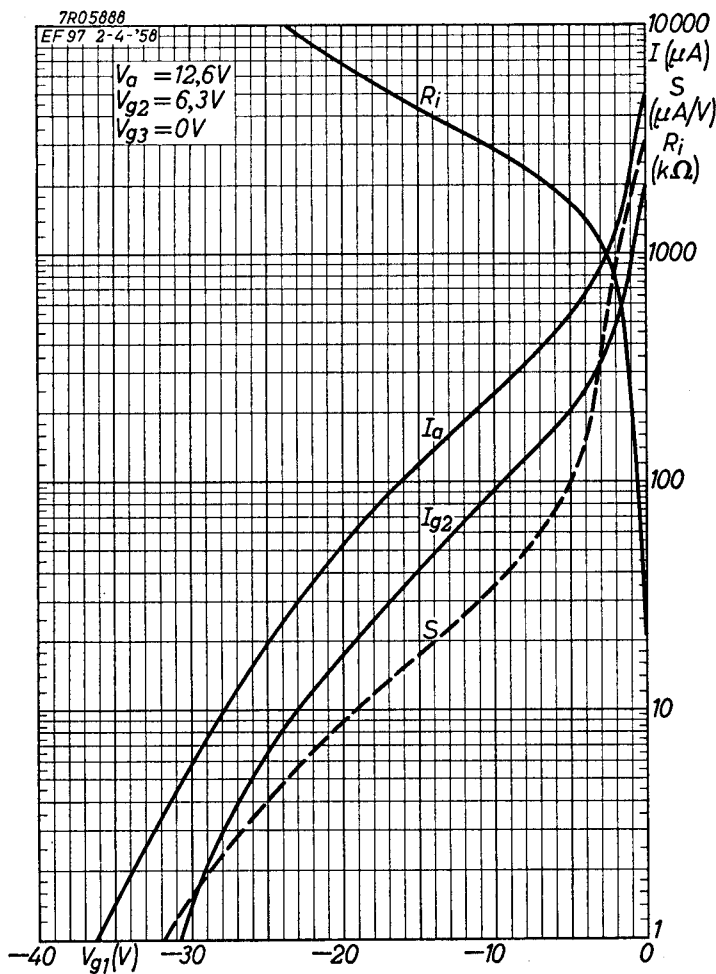

3.3.1958


A

PHILIPS

EF97


7Z01228


EF97

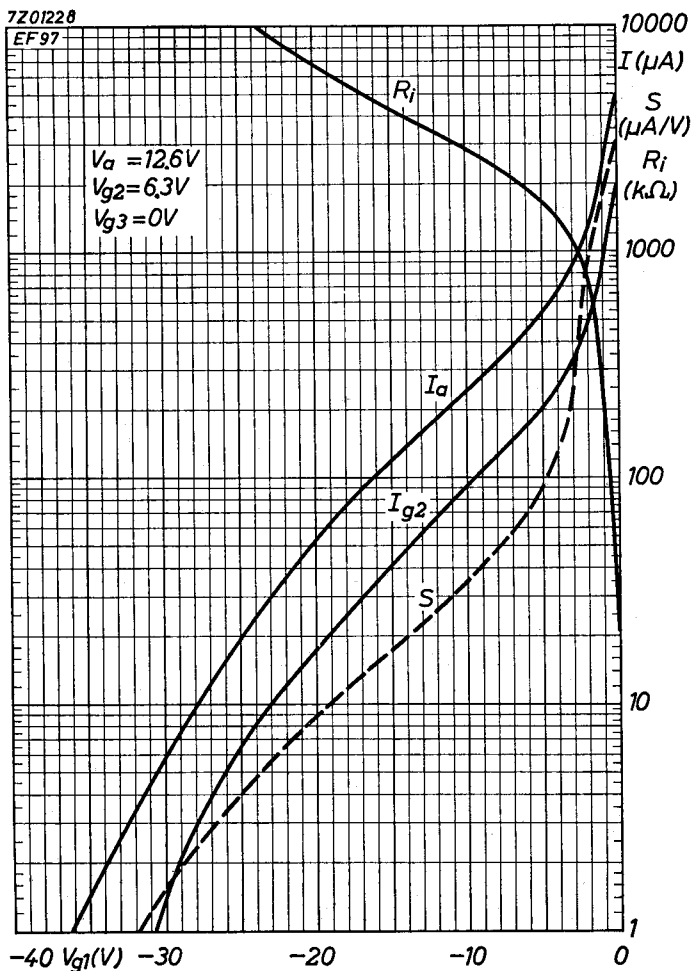

9.9.1962


A

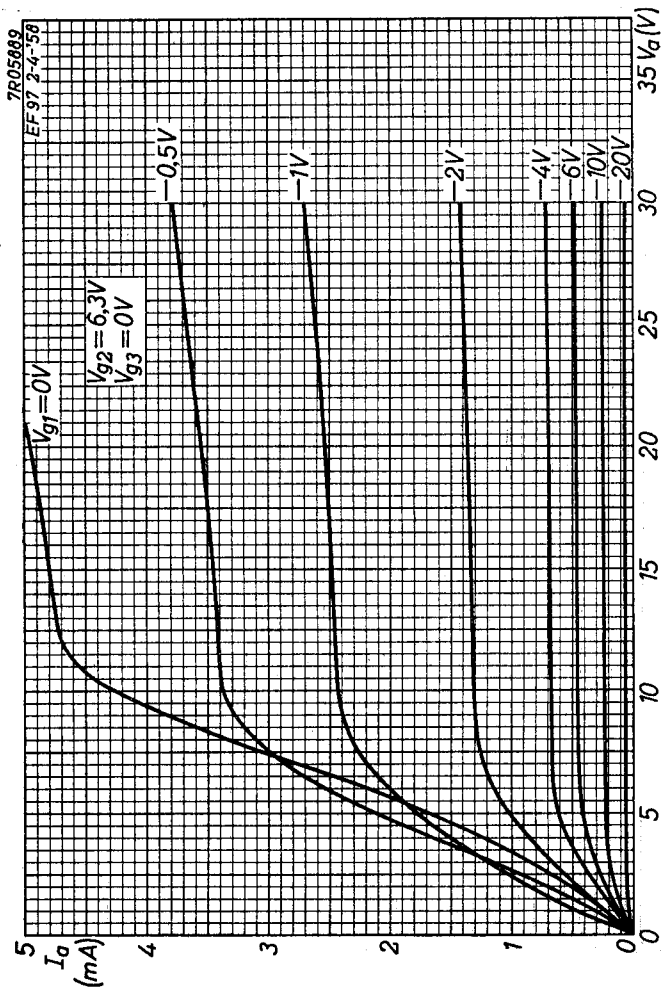EF97**PHILIPS**

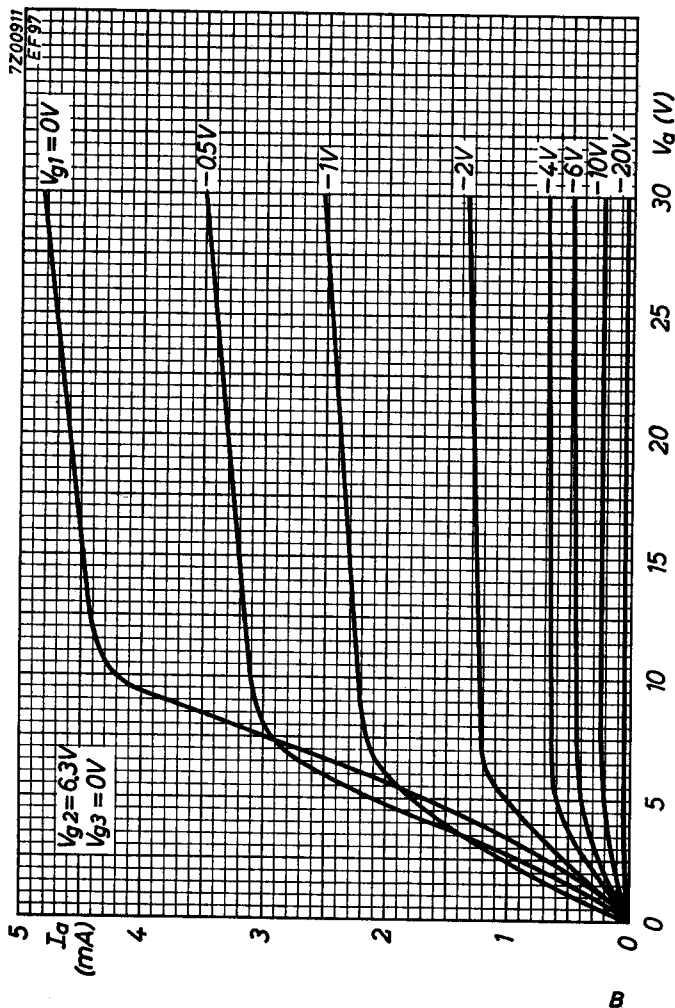EF97**PHILIPS**

PHILIPS

EF97

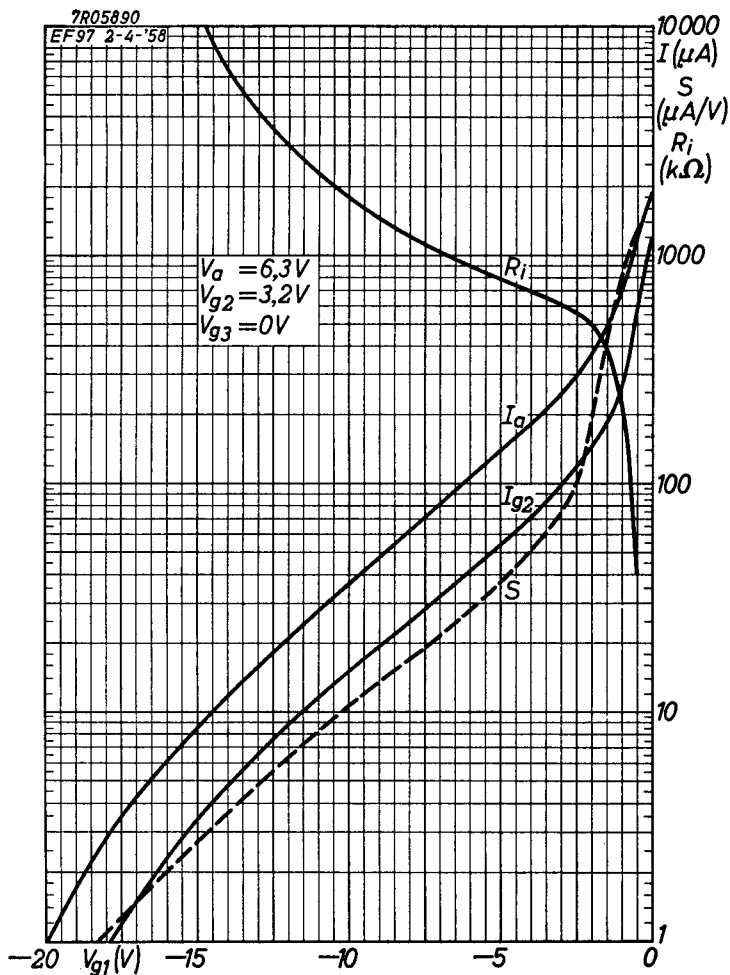

3.3.1958


C

PHILIPS

EF97


7Z01227


EF 97

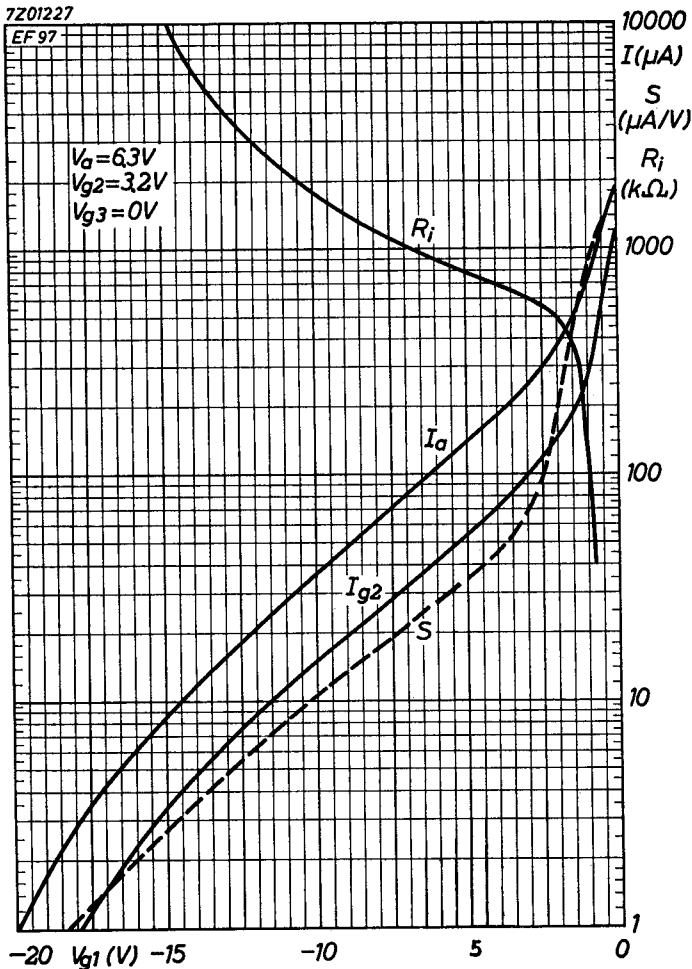

9.9.1962

C

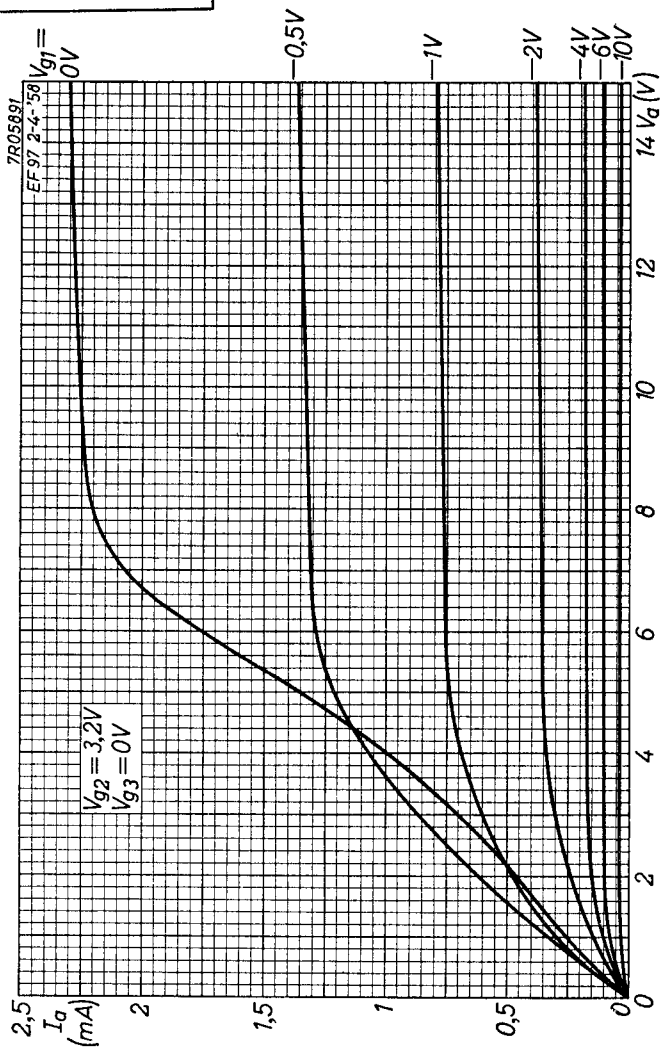EF97**PHILIPS**

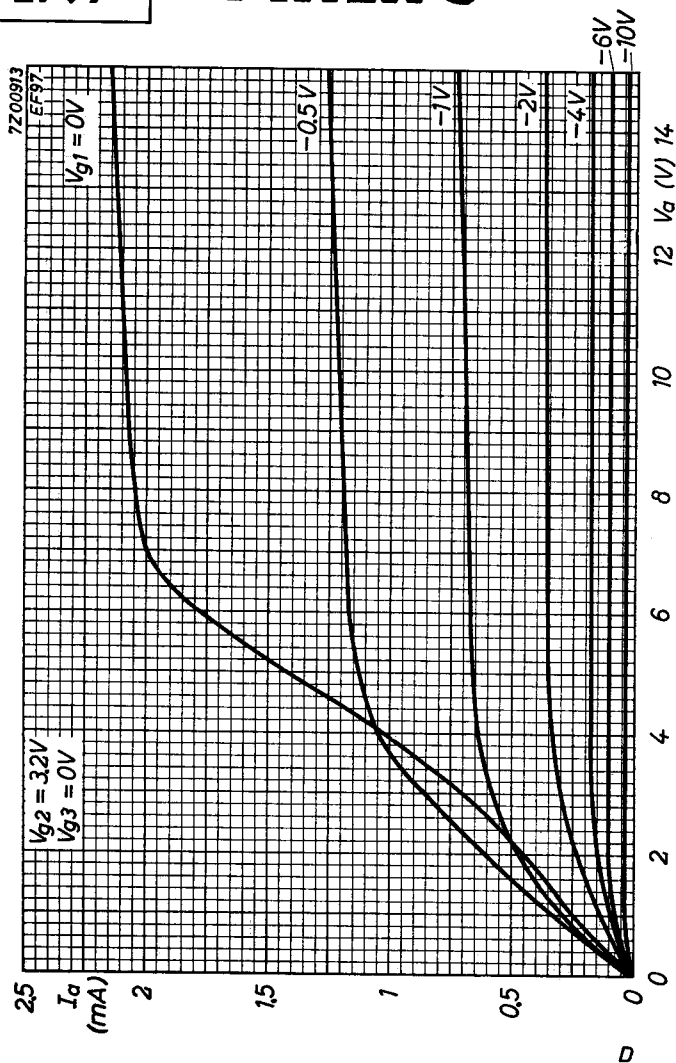EF97**PHILIPS**

PHILIPS

EF97


7R05892

EF97 2-4-'58

$$V_a = 6,3V$$

$$V_{g2} = 1,6V$$

$$V_{g3} = 0V$$

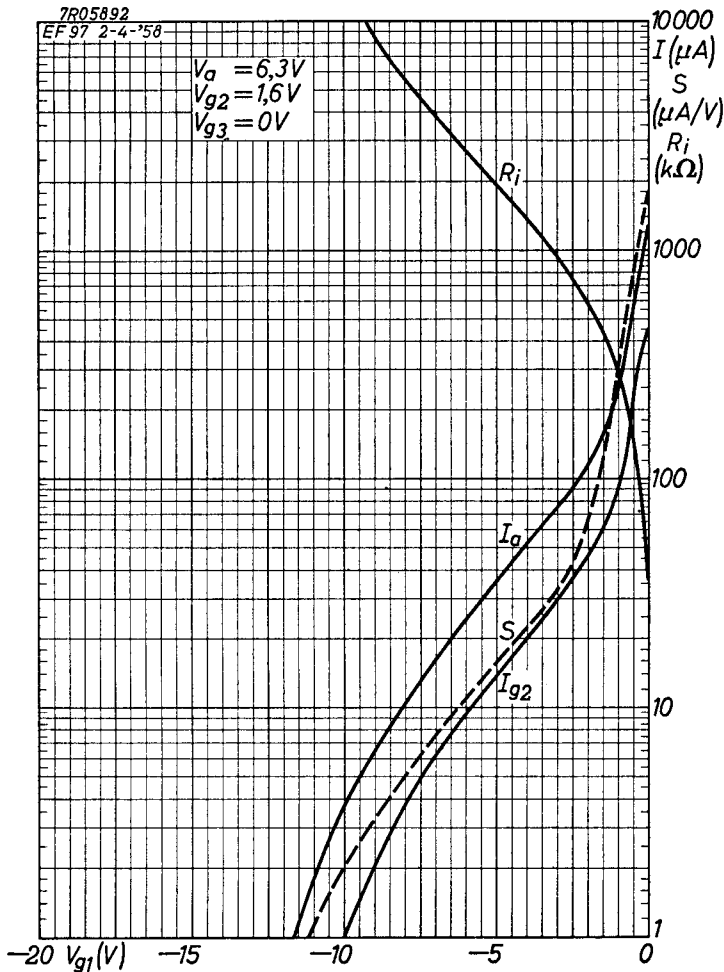

3.3.1958


E

PHILIPS

EF97

7Z00912

EF97

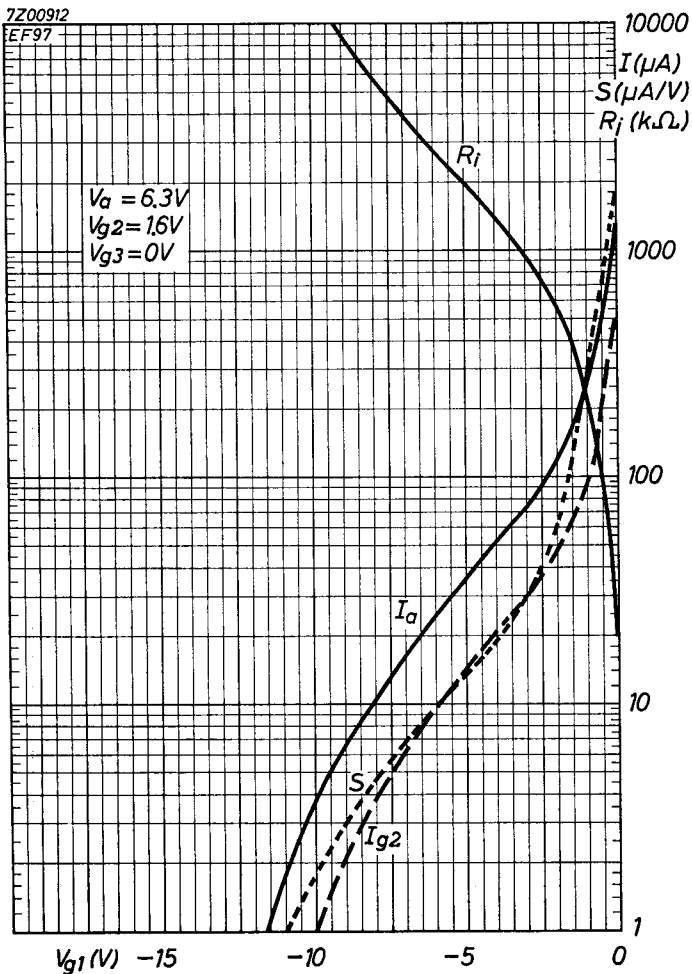



9.9.1962



E



EF97



PHILIPS


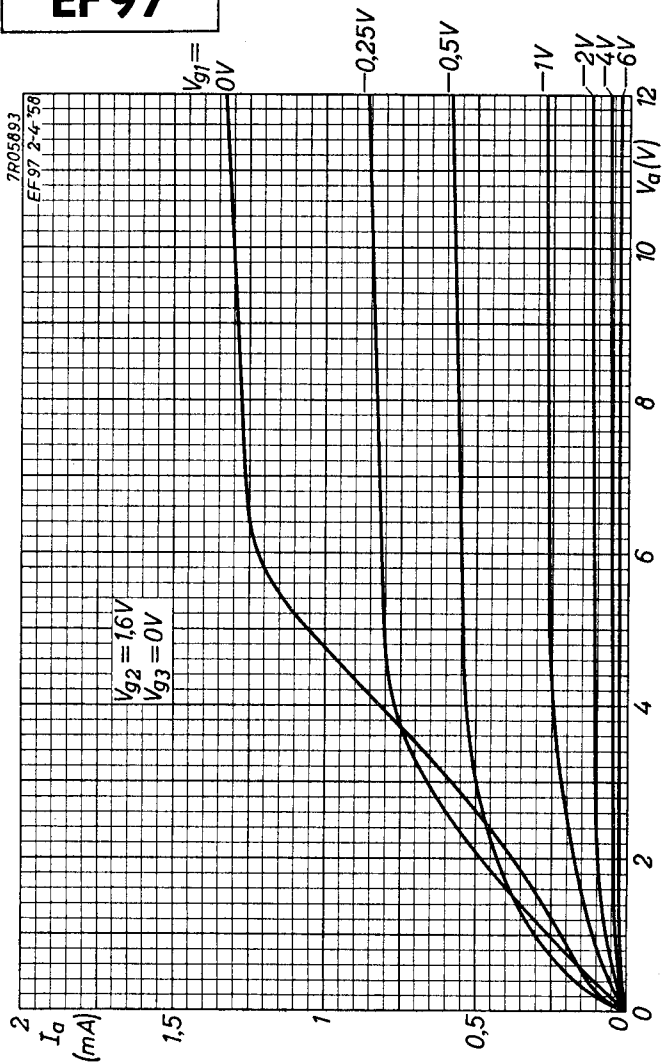


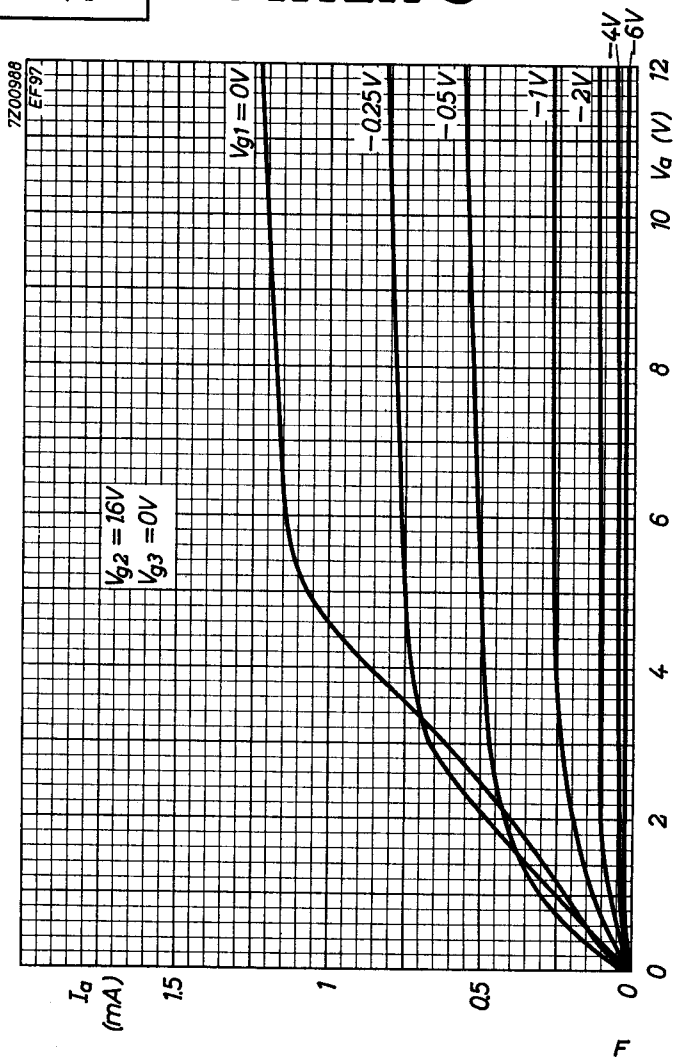EF97**PHILIPS**

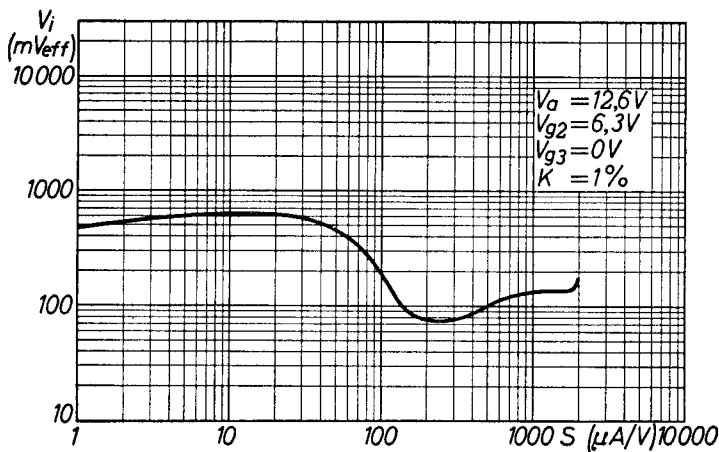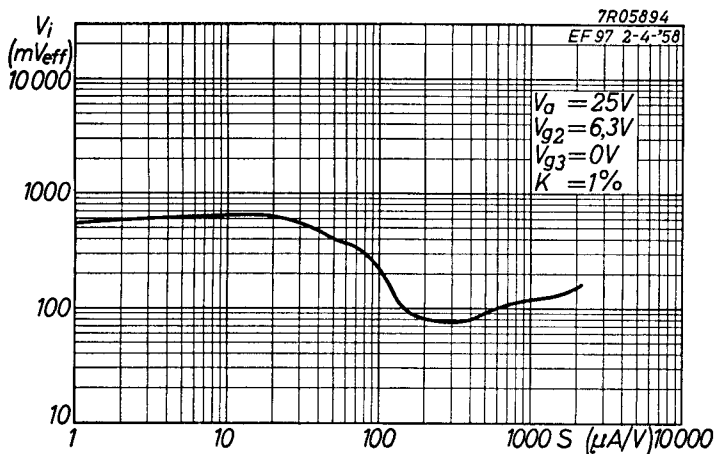

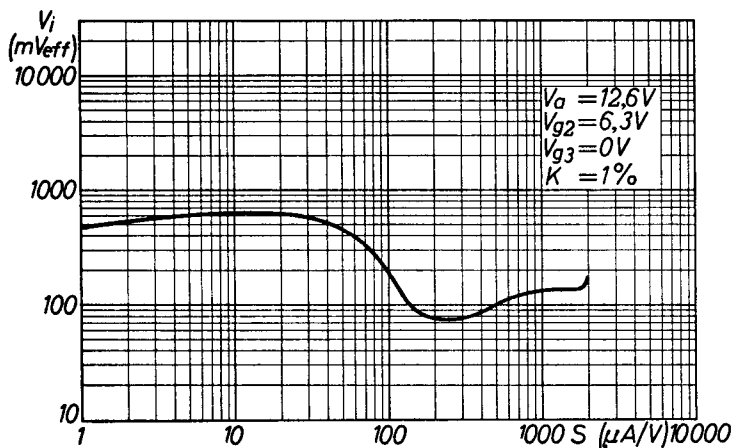
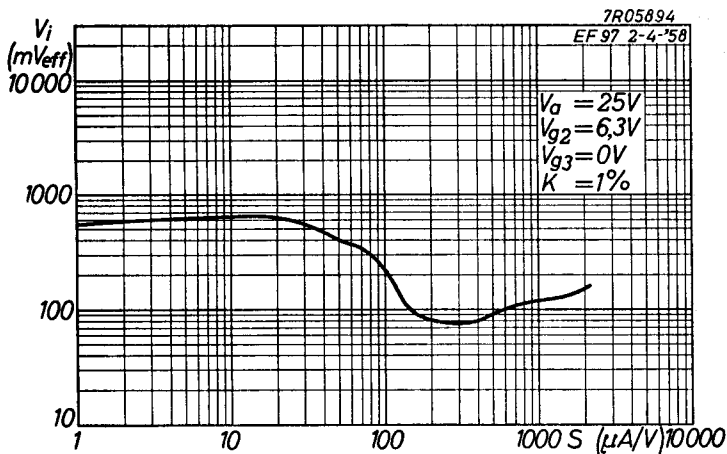


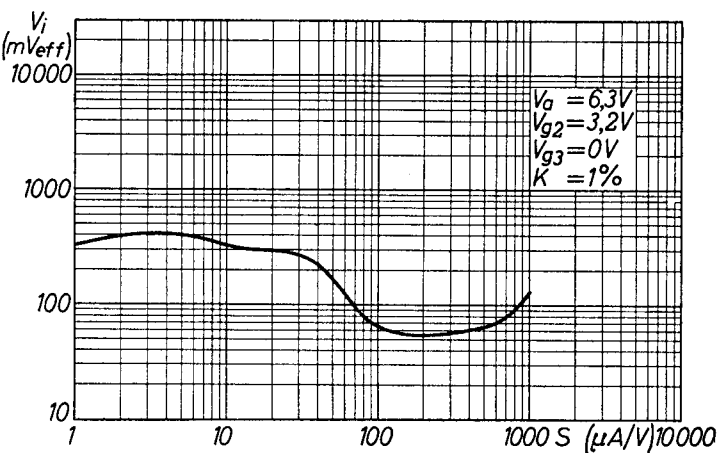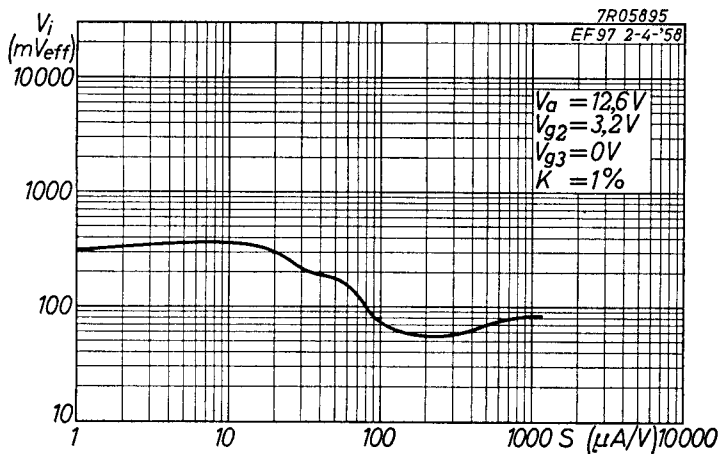EF97**PHILIPS**

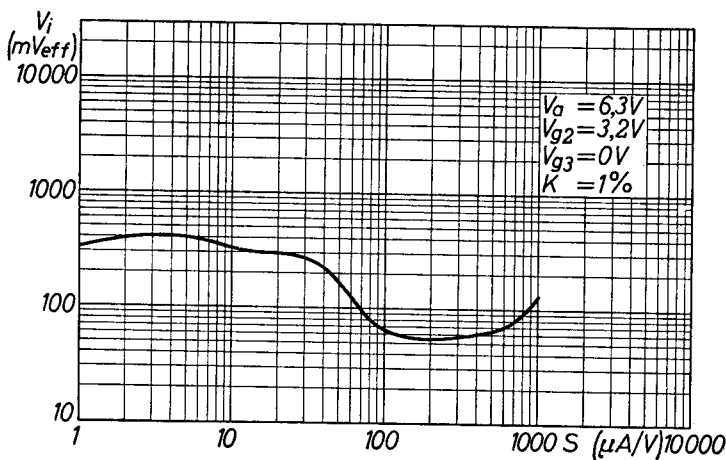
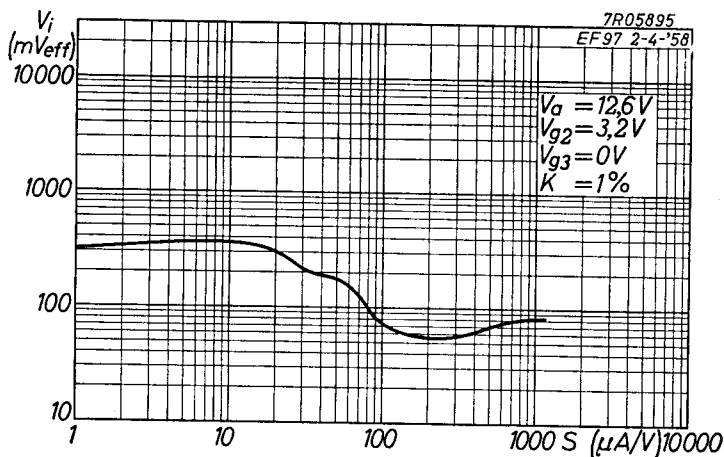
EF97**PHILIPS**

PHILIPS

EF97

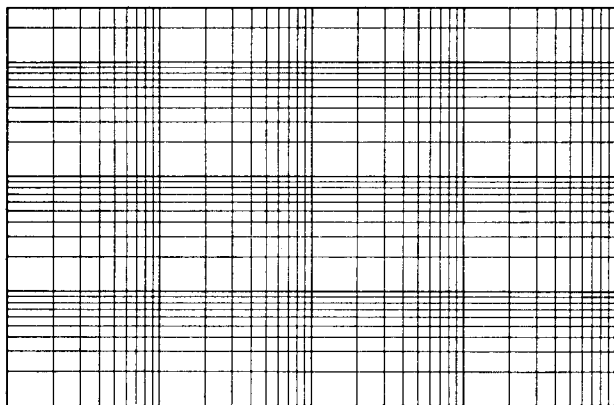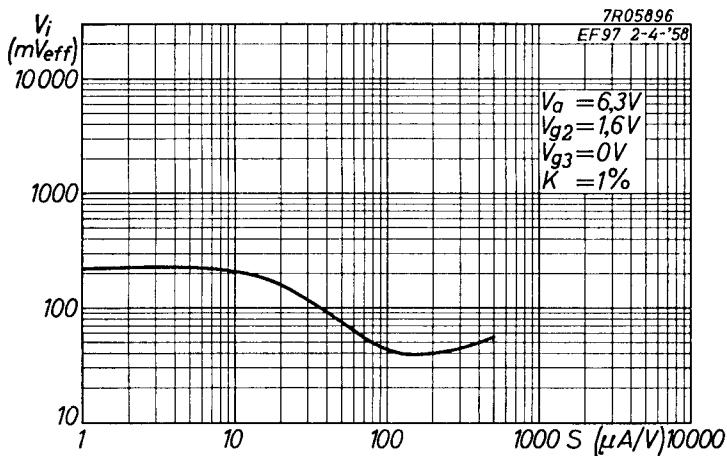

3.3.1958

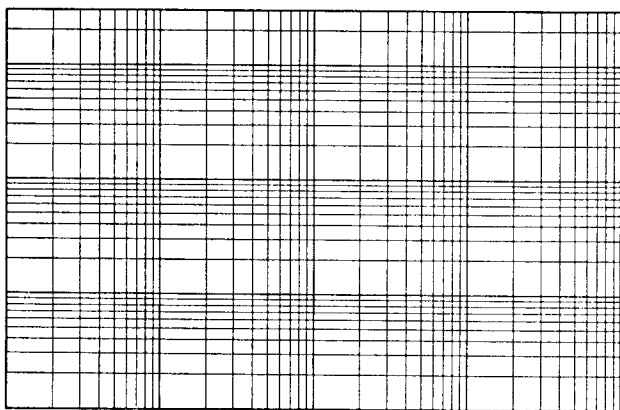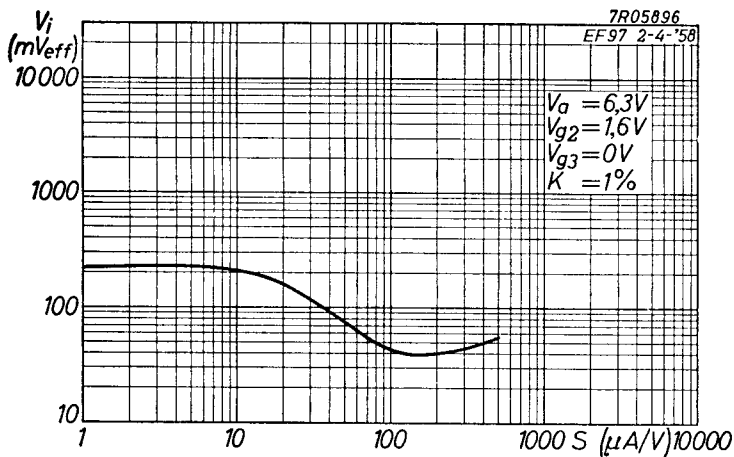



	EF97	
page	sheet	date
1	1	1959.04.04
2	1	1962.09.09
3	2	1959.04.04
4	2	1962.09.09
5	3	1959.04.04
6	A	1958.03.03
7	A	1962.09.09
8	B	1958.03.03
9	B	1962.09.09
10	C	1958.03.03
11	C	1962.09.09
12	D	1958.03.03
13	D	1962.09.09
14	E	1958.03.03
15	E	1962.09.09
16	F	1958.03.03
17	F	1962.09.09
18	G	1958.03.03
19	G	1962.09.09

20	H	1958.03.03
21	H	1962.09.09
22	I	1958.03.03
23	I	1962.09.09
24, 25	FP	2005.05.06