


# Power management (dual digital transistors)

## EMD12 / UMD12N

### ●Features

- 1) Both the DTA144E and DTC144E in a EMT or UMT package.


### ●Equivalent circuit



### ●Package, marking, and packaging specifications

Type	EMD12	UMD12N
Package	EMT6	UMT6
Marking	D12	D12
Code	T2R	TR
Basic ordering unit (pieces)	8000	3000

### ●External dimensions (Units : mm)

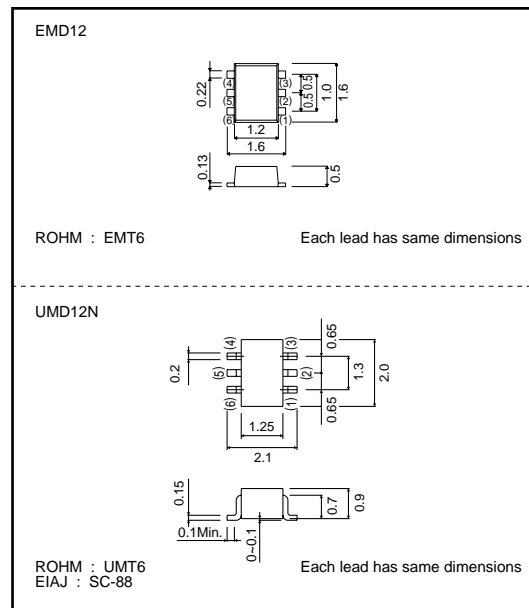

### ●Absolute maximum ratings (Ta=25°C)

Parameter	Symbol	Limits	Unit
Supply voltage	$V_{CC}$	50	V
Input voltage	$V_{IN}$	40	V
		-10	
Output current	$I_C$	100	mA
	$I_O$	30	mA
Power dissipation	$P_d$	150(TOTAL)	mW *1
Junction temperature	$T_j$	150	°C
Storage temperature	$T_{stg}$	-55~+150	°C

\*1 120mW per element must not be exceeded.  
PNP type negative symbols have been omitted

### ●Electrical characteristics (Ta=25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Input voltage	$V_{I(off)}$	-	-	0.5	V	$V_{CC}=5/-5V, I_O=100/-100\mu A$
	$V_{I(on)}$	3	-	-	V	$V_O=0.3/-0.3V, I_O=2/-2mA$
Output voltage	$V_{O(on)}$	-	-	0.3	V	$I_O=10/-10mA, I_I=0.5/-0.5mA$
Input current	$I_I$	-	-	0.18	mA	$V_I=5/-5V$
Output current	$I_{O(off)}$	-	-	0.5	$\mu A$	$V_{CC}=50/-50V, V_I=0V$
DC current gain	$G_I$	68	-	-	-	$I_O=5/-5mA, V_O=5/-5V$
Transition frequency	$f_r$	-	250	-	MHz	$V_{CE}=10/-10V, I_E=-5/5mA, f=100MHz$ *
Input resistance	$R_1$	32.9	47	61.1	k $\Omega$	-
Resistance ratio	$R_2/R_1$	0.8	1	1.2	-	-

\*Transition frequency of the device. PNP type negative symbols have been omitted