



# 2SB2907

## PNP GENERAL PURPOSE SWITCHING TRANSISTOR


**Voltage** -60 V **Current** -600 mA

### Features

- PNP epitaxial silicon, planar design
- Collector-emitter voltage  $V_{CE} = -60V$
- Collector current  $I_C = -600mA$
- Lead free in compliance with EU RoHS 2011/65/EU directive.
- Green molding compound as per IEC61249 Std. (Halogen Free)

### Mechanical Data

- Case : TO-92 and TO-92 AMMO Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Approx. Weight : 0.007 ounces, 0.196grams
- Marking : B2907

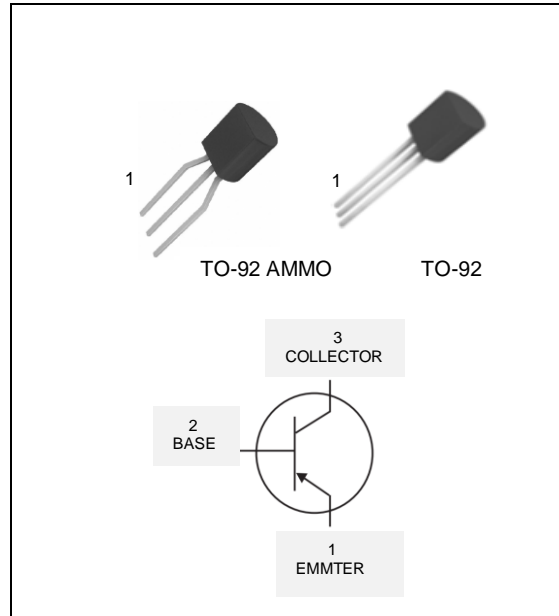

### Maximum Ratings and Thermal Characteristics ( $T_A=25^\circ C$ unless otherwise noted)

PARAMETER	SYMBOL	LIMITS	UNITS	
Collector–Emitter Voltage	$V_{CEO}$	-60	V	
Collector–Base Voltage	$V_{CBO}$	-60	V	
Emitter–Base Voltage	$V_{EBO}$	-5.0	V	
Collector Current – Continuous	$I_C$	-600	mA	
Power Dissipation	$P_D$	$T_A=25^\circ C$	625	mW
		Derate above $25^\circ C$	5	mW/ $^\circ C$
Operating Junction and Storage Temperature Range	$T_J, T_{STG}$	-55~150	$^\circ C$	
Typical Thermal resistance - Junction to Ambient	$R_{\theta JA}$	200	$^\circ C/W$	

- Limited only By Maximum Junction Temperature



# 2SB2907

## Electrical Characteristics ( $T_A=25^\circ\text{C}$ unless otherwise noted)

PARAMETER	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNITS
<b>Static</b>						
Collector–Emitter Breakdown Voltage	$V_{(BR)}\text{ CEO}$	$I_C=-10\text{mA}, I_B=0$	-60	-	-	V
Collector–Base Breakdown Voltage	$V_{(BR)}\text{ CBO}$	$I_C=-10\mu\text{A}, I_E=0$	-60	-	-	V
Emitter–Base Breakdown Voltage	$V_{(BR)}\text{ EBO}$	$I_E=-10\mu\text{A}, I_C=0$	-5.0	-	-	V
Base Cutoff Current	$I_{BL}$	$V_{CE}=-30\text{V}, V_{EB}=-0.5\text{V}$	-	-	-50	nA
Collector Cutoff Current	$I_{CEX}$	$V_{CE}=-30\text{V}, V_{EB}=-0.5\text{V}$	-	-	-50	nA
	$I_{CBO}$	$V_{CB}=-50\text{V}, I_E=0$	-	-	-50	nA
		$V_{CB}=-50\text{V}, I_E=0$ $T_J=125^\circ\text{C}$	-	-	-10	$\mu\text{A}$
<b>ON CHARACTERISTICS</b>						
DC Current Gain	$h_{FE}$	$I_C=-0.1\text{mA}, V_{CE}=-10\text{V}$	75	-	-	-
		$I_C=-1.0\text{mA}, V_{CE}=-10\text{V}$	100	-	-	
		$I_C=-10\text{mA}, V_{CE}=-10\text{V}$	100	-	-	
		$I_C=-150\text{mA}, V_{CE}=-10\text{V}$	100	-	300	
		$I_C=-500\text{mA}, V_{CE}=-10\text{V}$	50	-	-	
Collector–Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=-150\text{mA}, I_B=-15\text{mA}$	-	-	-0.4	V
		$I_C=-500\text{mA}, I_B=-50\text{mA}$	-	-	-1.6	
Base–Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=-150\text{mA}, I_B=-15\text{mA}$	-	-	-1.3	V
		$I_C=-500\text{mA}, I_B=-50\text{mA}$	-	-	-2.6	
<b>SMALL–SIGNAL CHARACTERISTICS</b>						
Collector–Base Capacitance	$C_{CBO}$	$V_{CB}=-10\text{V}, I_E=0, f=1\text{MHz}$	-	-	8	pF
Emitter–Base Capacitance	$C_{EBO}$	$V_{CB}=-2\text{V}, I_C=0, f=1\text{MHz}$	-	-	30	pF
Current Gain-Bandwidth Product	$F_T$	$I_C=-50\text{mA}, V_{CE}=20\text{V}$ $f=100\text{MHz}$	200	-	-	MHz
<b>SWITCHING</b>						
Turn-On Time	$t_{on}$	$V_{CC}=-30\text{V}, V_{BE}=-0.5\text{V}$ $I_C=-150\text{mA}, I_B=-15\text{mA}$	-	-	45	ns
Delay Time	$t_d$		-	-	10	
Rise Time	$t_r$		-	-	40	
Turn-Off F Time	$t_{off}$	$V_{CC}=-6\text{V}, I_C=-150\text{mA},$ $I_{B1}=I_{B2}=-15\text{mA}$	-	-	100	
Storage Time	$t_s$		-	-	80	
Fall Time	$t_f$		-	-	30	



# 2SB2907

## TYPICAL CHARACTERISTIC CURVES

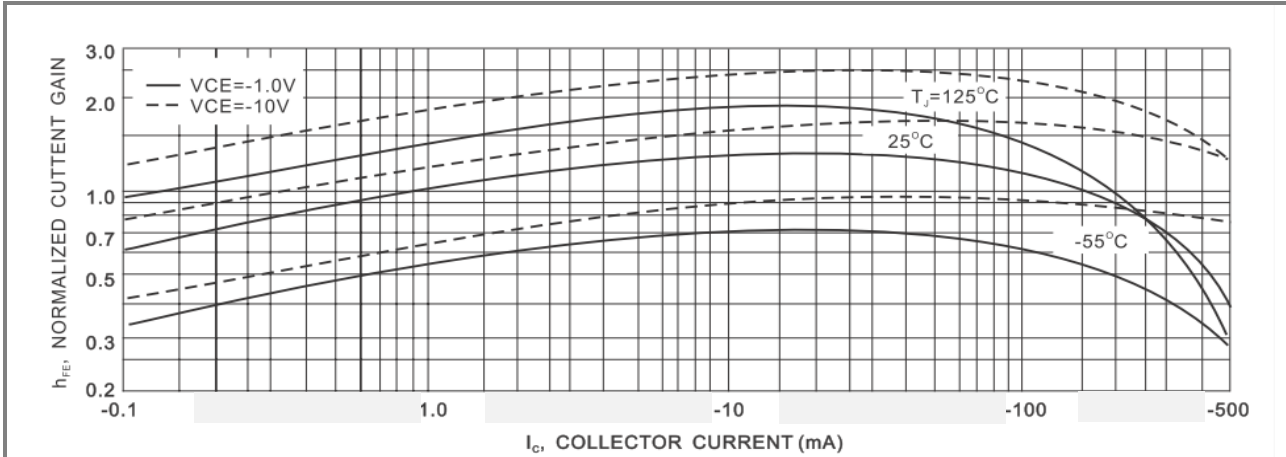


Fig.1 DC Current Gain

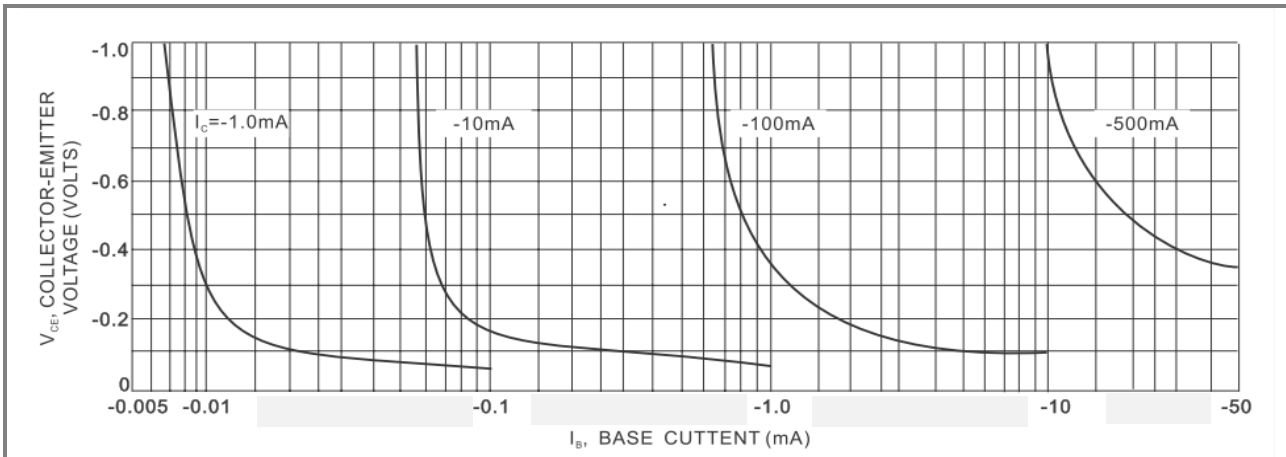


Fig.2 Corrector Saturation Region

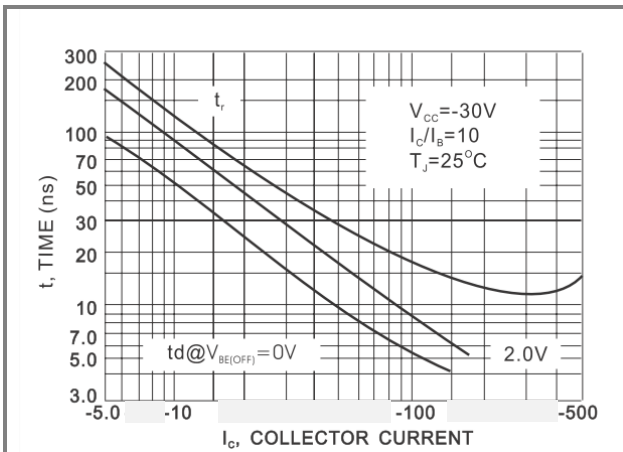


Fig.3 Turn-On Time

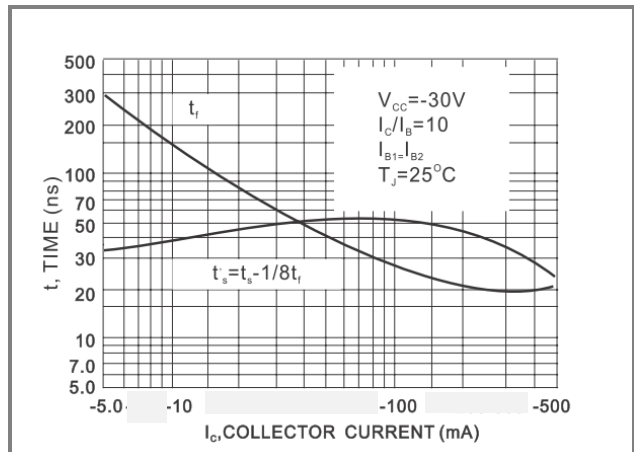


Fig.4 Turn-Off Time



# 2SB2907

## TYPICAL CHARACTERISTIC CURVES

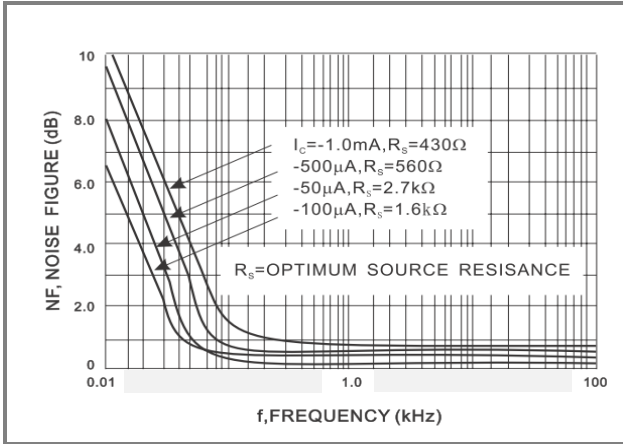


Fig.5 Frequency Effects

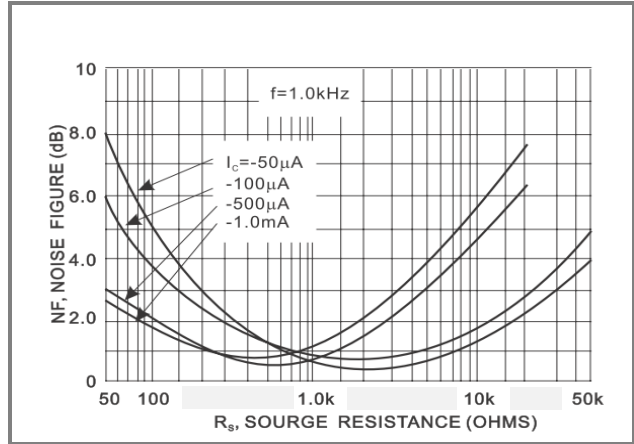


Fig.6 Source Resistance Effects

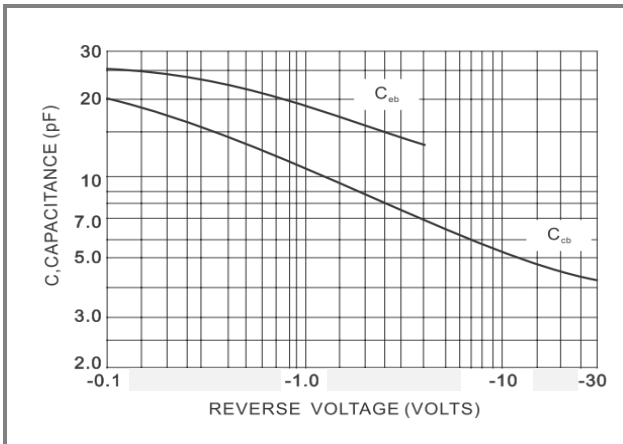


Fig.7 Capacitances

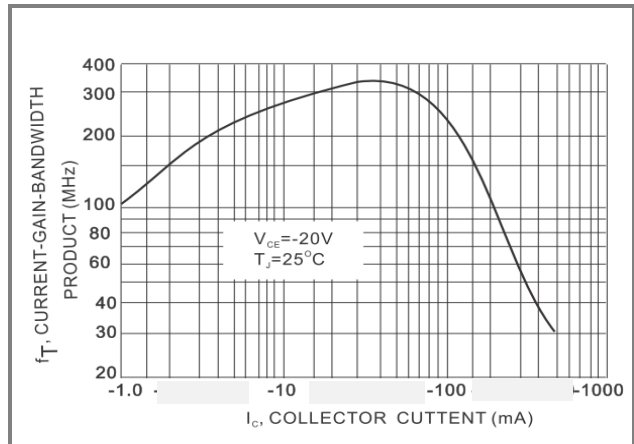


Fig.8 Current Gain Bandwidth Product

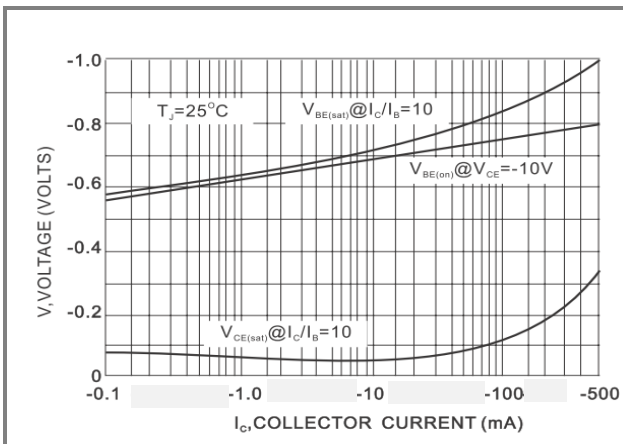


Fig.9 On Voltage



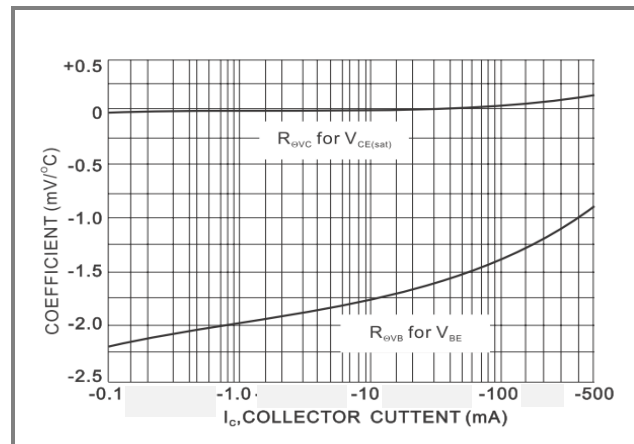


Fig.10 Temperature Coefficients

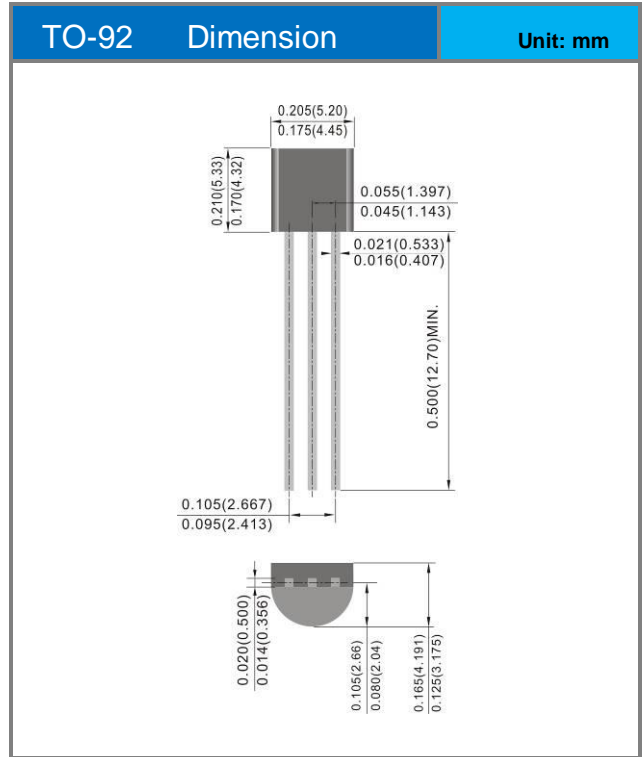

# 2SB2907

## Packaging Information

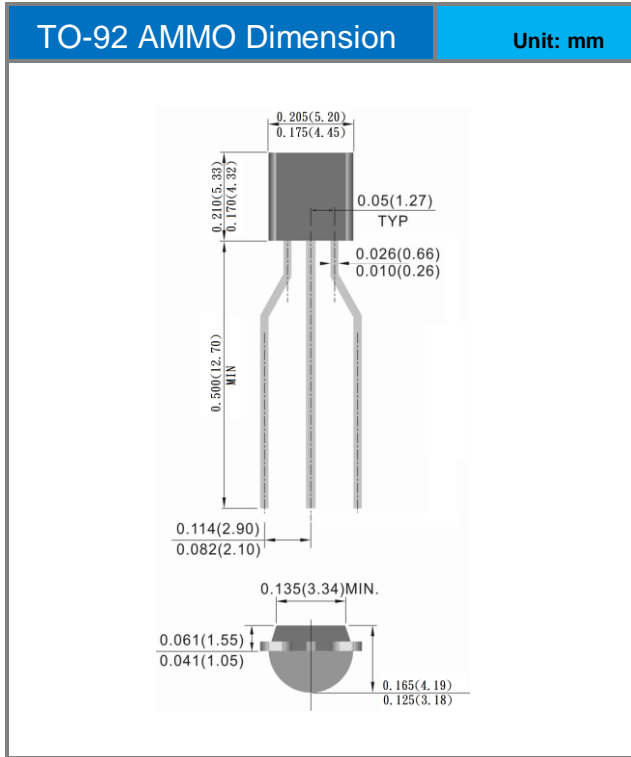



## 2SB2907

### PART NO PACKING CODE VERSION

Part No Packing Code	Package Type	Packing type	Marking	Version
2SB2907_B0_00001	TO-92	1000pcs / bag	B2907	Halogen free
2SB2907_A0_00001	TO-92 AMMO	2000pcs / box	B2907	Halogen free



## 2SB2907

### Disclaimer

- Reproducing and modifying information of the document is prohibited without permission from Panjit International Inc..
- Panjit International Inc. reserves the rights to make changes of the content herein the document anytime without notification. Please refer to our website for the latest document.
- Panjit International Inc. disclaims any and all liability arising out of the application or use of any product including damages incidentally and consequentially occurred.
- Panjit International Inc. does not assume any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.
- Applications shown on the herein document are examples of standard use and operation. Customers are responsible in comprehending the suitable use in particular applications. Panjit International Inc. makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.
- The products shown herein are not designed and authorized for equipments requiring high level of reliability or relating to human life and for any applications concerning life-saving or life-sustaining, such as medical instruments, transportation equipment, aerospace machinery et cetera. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify Panjit International Inc. for any damages resulting from such improper use or sale.
- Since Panjit uses lot number as the tracking base, please provide the lot number for tracking when complaining.