

FA7615CP(E)

Bipolar IC
For Switching Power Supply Control

■ Description

The FA7615CP(E) is a bipolar IC containing basic circuit necessary for PWM-type switching power supply control. This IC can be operated by external synchronizing pulses.

■ Features


- External synchronization input terminal
- Low-voltage operation ($V_{CC} = 3.6$ to $22V$)
- Totem-pole predriver
- Latch-mode short-circuit protection function (no malfunction due to electrical noise)
- One capacitor shared for short-circuit protection and for soft-start to minimize the number of external discrete components

■ Applications


- Battery power supply for portable equipment

■ Dimensions, mm


● SSOP-16

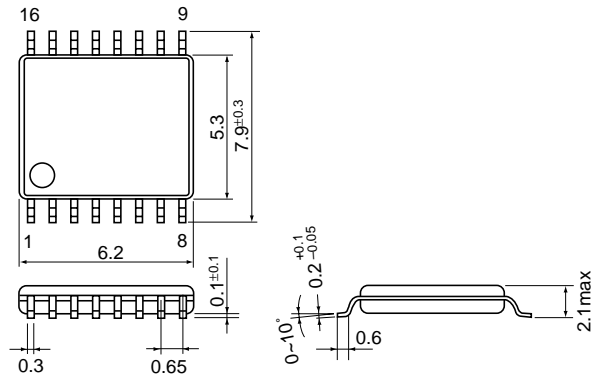

● DIP-16

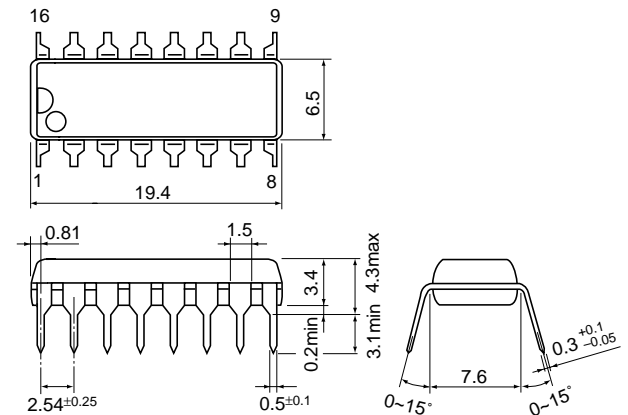

■ Block diagram

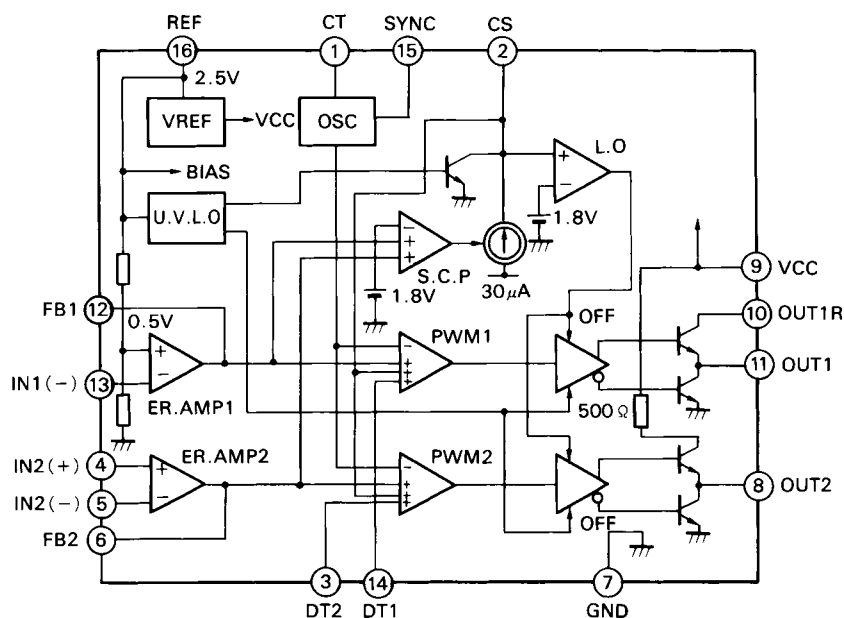

| Pin No. | Pin symbol | Description |
|---------|------------|--|
| 1 | CT | Oscillator timing capacitor |
| 2 | CS | Capacitor for soft-start, short-circuit protection and delay |
| 3 | DT2 | Dead time adjustment |
| 4 | IN2 (+) | Non-inverting input to error amplifier |
| 5 | IN2 (-) | Inverting input to error amplifier |
| 6 | FB2 | Error amplifier output |
| 7 | GND | Ground |
| 8 | OUT2 | CH. 2 Output |
| 9 | VCC | Power supply |
| 10 | OUT1R | CH. 1 Current limiting resistor |
| 11 | OUT1 | CH. 1 Output |
| 12 | FB1 | Error amplifier output |
| 13 | IN1 (-) | Inverting input to error amplifier |
| 14 | DT1 | Dead time adjustment |
| 15 | SYNC | External synchronization input |
| 16 | REF | Reference voltage output (2.5V) |

■ Absolute maximum ratings

| Item | Symbol | Rating | Unit |
|----------------------------------|------------------|-------------|------|
| Supply voltage | V _{CC} | 22 | V |
| Reference voltage output current | I _{OR} | 5 | mA |
| Output current | I _O | ±50 | mA |
| Total power dissipation | P _d | 400 | mW |
| Operating temperature | T _{opr} | -20 to +85 | °C |
| Storage temperature | T _{stg} | -40 to +150 | °C |

■ Recommended operating conditions

| Item | Symbol | Min. | Max. | Unit |
|------------------------------|------------------|------|--------|------|
| Supply voltage | V _{CC} | 3.6 | 20 | V |
| Feedback resistance | R _{NF} | 100 | | kΩ |
| Oscillator timing capacitor | C _T | 220 | 22,000 | pF |
| Oscillator timing resistance | R _T | 10 | 100 | kΩ |
| Oscillation frequency | f _{osc} | 5 | 200 | kHz |

■ Electrical characteristics (T_a = 25°C, V_{CC} = 6V, R_T = 47kΩ, C_T = 1000pF)

Reference voltage section

| Item | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|--|------------------|---|-------|-------|-------|------|
| Output voltage | V _{REF} | I _{OR} = 1mA | 2.383 | 2.432 | 2.481 | V |
| Line regulation | LINE | V _{CC} = 3.6 to 20V, I _{OR} = 1mA | | 4 | 12 | mV |
| Load regulation | LOAD | I _O = 0.1 to 1mA | | 1 | 6 | mV |
| Output voltage variation due to temperature change | V _{TC1} | T _a = -20 to +25°C | -1 | | 1 | % |
| | V _{TC2} | T _a = +25 to +85°C | -1 | | 1 | % |

Oscillator section

| Item | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|--|-------------------|--|------|------|------|------|
| Oscillation frequency | f _{OSC} | C _T = 1000pF, R _T = 47kΩ | 17 | 20 | 23 | kHz |
| Frequency variation 1 (due to supply voltage change) | f _{ΔV} | V _{CC} = 3.6 to 20V | | 1 | | % |
| Frequency variation 2 (due to temperature change) | f _{ΔT} | T _a = -20 to +85°C | | 5 | | % |
| Synchronizing terminal input current | I _{SYNC} | V _{SYNC} = 2V | | 0.4 | 1.0 | mA |
| Synchronizing terminal input voltage | V _{SYNC} | | 1 | | 2.5 | V |

Error amplifier section

| Item | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|---|------------------|-------------------------|-----------------------|-------|-------|------|
| Reference voltage | V _B | | 0.484 | 0.494 | 0.504 | V |
| Input bias current | I _B | | | 5 | 100 | nA |
| Open-loop voltage gain | A _V | | 70 | | | dB |
| Unity-gain bandwidth | G _B | | | 1.0 | | MHz |
| Maximum output voltage (Pin 6 and Pin 12) | V _{OM+} | R _{NF} = 100kΩ | V _{REF} -0.2 | | | V |
| | V _{OM-} | R _{NF} = 100kΩ | | | 200 | mV |
| Output source current (Pin 6 and Pin 12) | I _{OM+} | V _{OM} = 1V | 40 | 85 | 200 | μA |

PWM comparator section

| Item | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|--|-------------------|------------------|------|------|------|------|
| Input threshold voltage (Pin 6 and Pin 12) | V _{TH0} | Duty cycle = 0% | | 0.38 | 0.48 | V |
| Input threshold voltage (Pin 6 and Pin 12) | V _{TH50} | Duty cycle = 50% | | 0.6 | | V |

Dead time adjustment circuit section

| Item | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|--|----------------------|------------------|------|------|------|------|
| Input bias current (Pin 3 and Pin 14) | IBDT | | | 80 | 300 | nA |
| Input threshold voltage (Pin 3 and Pin 14) | V _{TH DT0} | Duty cycle = 0% | | 0.38 | 0.48 | V |
| Input threshold voltage (Pin 3 and Pin 14) | V _{TH DT50} | Duty cycle = 50% | | 0.60 | | V |

Short-circuit protection circuit section

| Item | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|--|--------------------|--------------------------------|------|------|------|------|
| Input threshold voltage (Pin 6 and Pin 12) | V _{TH PC} | | 1.60 | 1.80 | 2.00 | V |
| Charge current (Pin 2) | I _{CHG} | Pin 2 = 0V, Pin 6, Pin 12 = 2V | 18 | 30 | 42 | μA |
| Latch-mode threshold voltage (Pin 2) | V _{TH LA} | | 1.60 | 1.80 | 2.00 | V |

Undervoltage lockout section

| Item | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|-----------------------------|---------------------|----------------|------|------|------|------|
| OFF-to-ON threshold voltage | V _{TH ON} | | | 2.65 | | V |
| ON-to-OFF threshold voltage | V _{TH OFF} | | | 2.60 | | V |
| Voltage hysteresis | V _{HYS} | | | 50 | | mV |

Output section


| Item | Symbol | Test condition | Min. | Typ. | Max. | Unit | |
|--------------------------------------|-----------------------------------|-----------------------------------|------------------------------|------|------|------|---|
| Output saturation voltage | H-level (CH.1) | VO1H | Output source current = 20mA | | 0.3 | 0.8 | V |
| | L-level (Common to CH.1 and CH.2) | VO1L/2L | Output sink current = 20mA | | 0.3 | 0.8 | V |
| CH. 1 Output source current (Pin 11) | I _{SOURCE1} | Pin 11 = 0V | 6 | 11 | 15 | mA | |
| CH. 2 Output source current (Pin 8) | I _{SOURCE2} | V _{CC} = 16V, Pin 8 = 0V | 19 | 27 | 36 | mA | |

Overall device


| Item | Symbol | Test condition | Min. | Typ. | Max. | Unit |
|--------------------------------|--------------------|-------------------------------------|------|------|------|------|
| Supply current | I _{CC LA} | Latch mode | | 2.0 | 3.0 | mA |
| Operating-state supply current | I _{CC AV} | R _L = ∞ Duty cycle = 50% | | 3.5 | 6.0 | mA |

■ Characteristic curves (Ta = 25°C)


Oscillation frequency (fosc) vs. timing resistor resistance (RT)

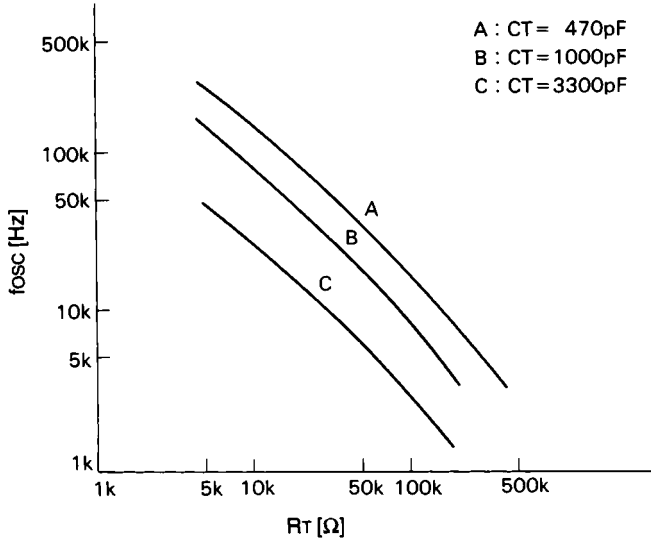


Output duty cycle vs. CS terminal voltage (Vcs)

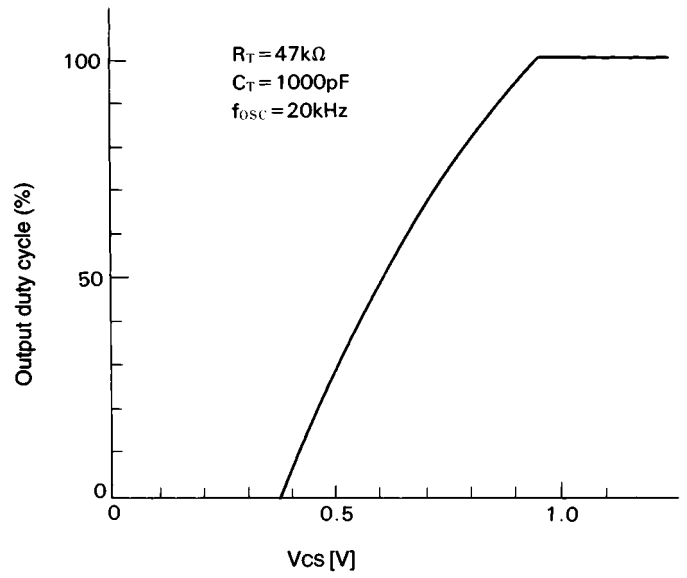


Output duty cycle vs. DT terminal voltage (VDT)

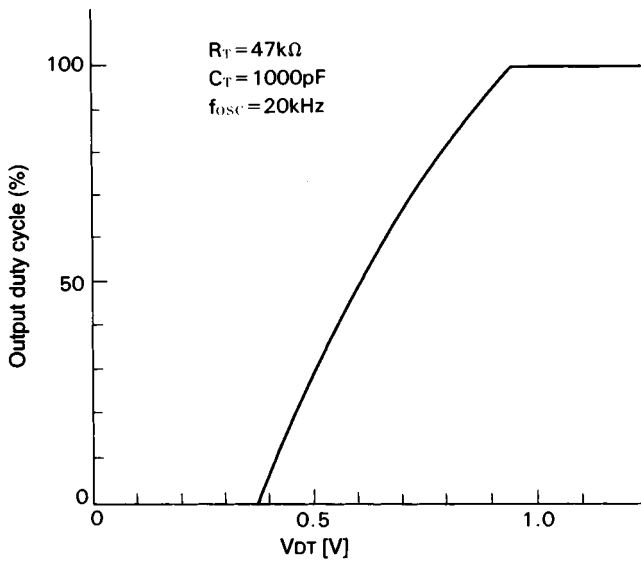


Output duty cycle vs. FB terminal voltage (VFB)

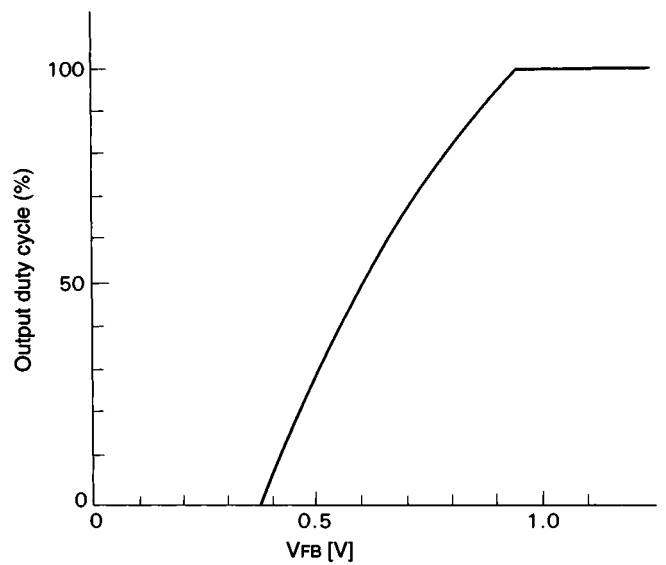


H-level output saturation voltage (VO1H) vs. CH. 1 output source current (ISOURCE1)

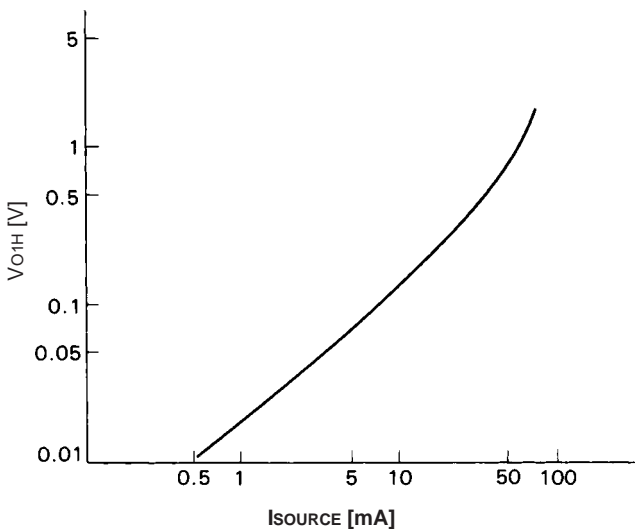


CH-2 output source current (ISOURCE2) vs. supply voltage (VCC)

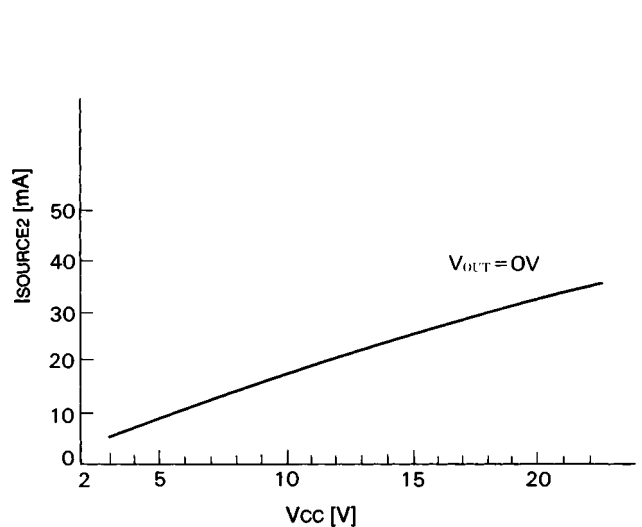


L-level output voltage (VoL) vs. output sink current (ISINK)

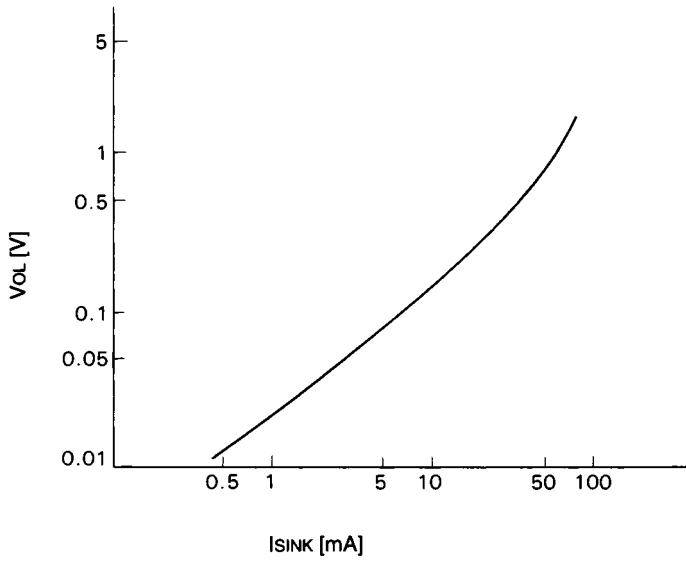

Supply current (Icc) vs. supply voltage (Vcc)

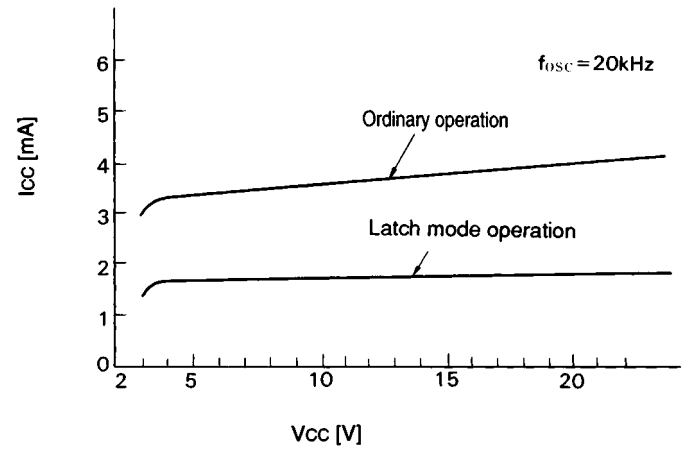


Error amplifier frequency (f) vs. voltage gain (AV)/phase (θ)

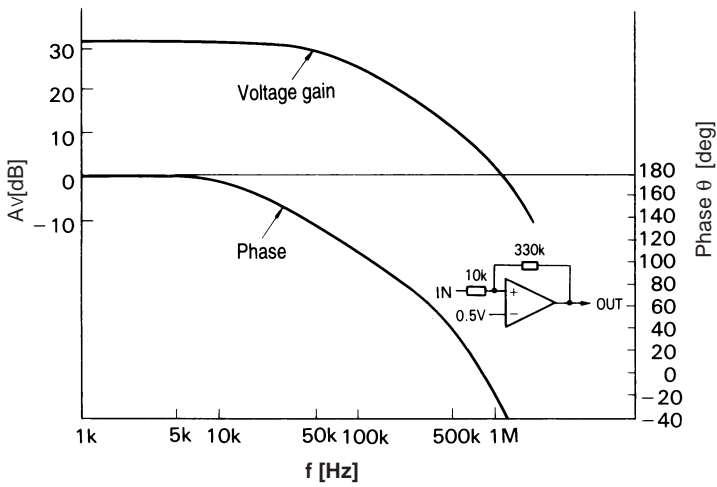

■ Application circuit

● Flyback-transformer type and chopper type boost converter circuit

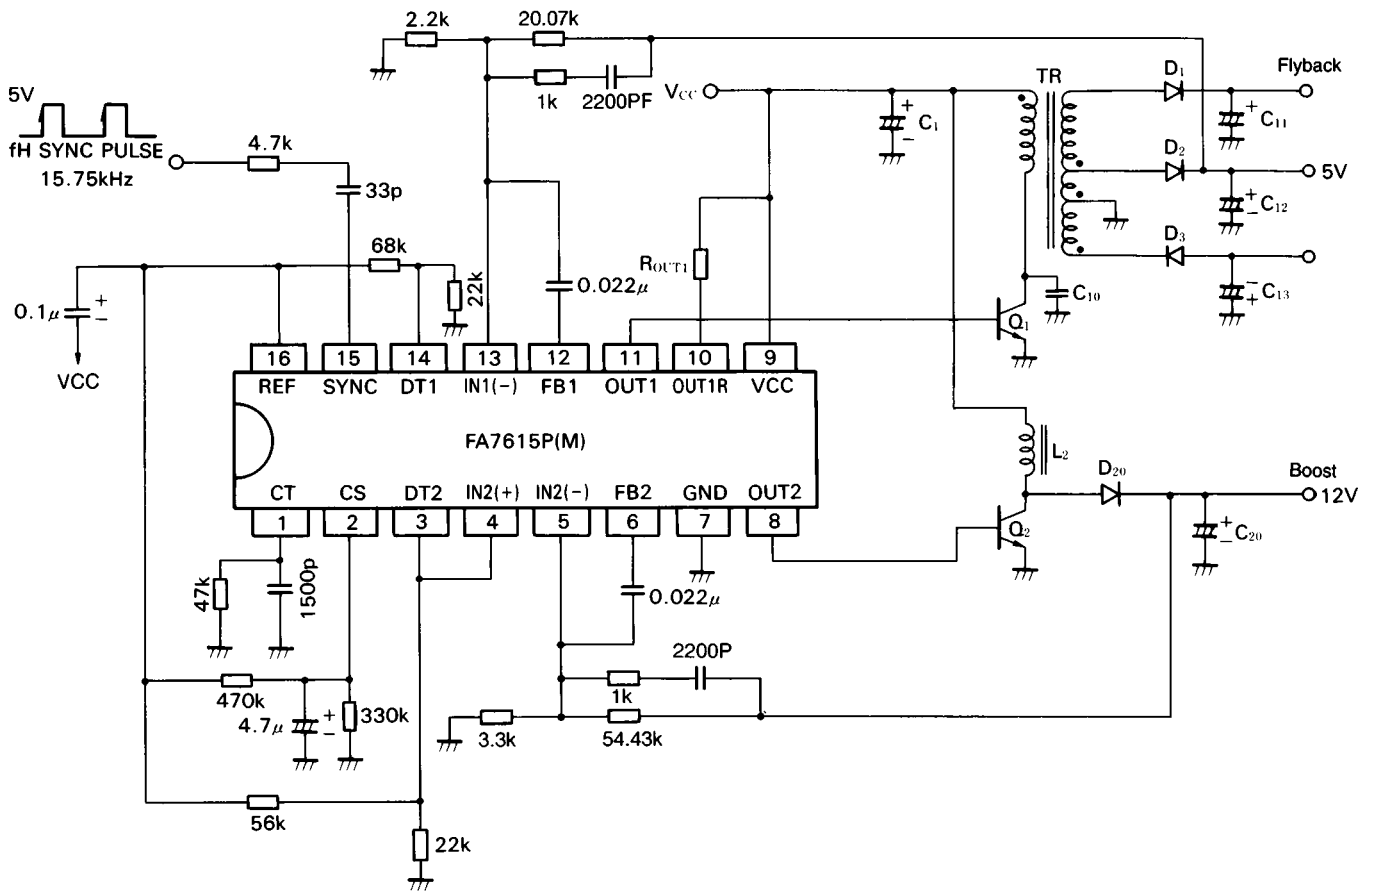

Parts tolerances characteristics are not defined in the circuit design sample shown above. When designing an actual circuit for a product, you must determine parts tolerances and characteristics for safe and economical operation.

Please connect a capacitor, which the value is about 0.01 μF to 0.1 μF, between VCC and REF terminals in order to prevent from irregular output pulse at start-up.