

FAN5340

Synchronous Constant-Current Series Boost LED Driver with PWM Brightness Control and Integrated Load Disconnect

Features

- Synchronous Current-Mode Boost Converter
- Up to 500mW Output Power
- Supports 2, 3, or 4 LEDs in Series
- 2.7V to 4.8V Input Voltage Range
- 1.2MHz Fixed Switching Frequency
- 1mA Maximum Quiescent Current
- Soft-Start Capability
- Input Under-Voltage Lockout (UVLO)
- Output Over-Voltage Protection (OVP)
- Short-Circuit Detection
- Thermal Shutdown (TSD) Protection
- 8-Lead 3.00 x 3.00mm MLP
- 8-Bump 1.57 x 1.57mm WLCSP

Applications

- Cellular Phones, Smart Phones
- Pocket PCs
- WLAN DC-DC Converter Modules
- PDA, DSC, PMP, and MP3 Players

Description

The FAN5340 is a synchronous constant-current LED driver capable of efficiently delivering up to 500mW to a string of up to four LEDs in series. Optimized for small form-factor applications, the 1.2MHz fixed switching frequency allows the use of chip inductors and capacitors.

For safety, the device features integrated short-circuit detection plus over-voltage and thermal shutdown protections. In addition, input under-voltage lockout protection is triggered if the battery voltage is low.

Brightness (dimming) control is implemented by applying a PWM signal of 300Hz to 1kHz on the EN pin. During shutdown, the FAN5340 disconnects the LED anodes from the output of the boost regulator, which holds the boost regulator's voltage on C_{OUT}, reducing audible noise from the PWM dimming and removing power from the LED string.

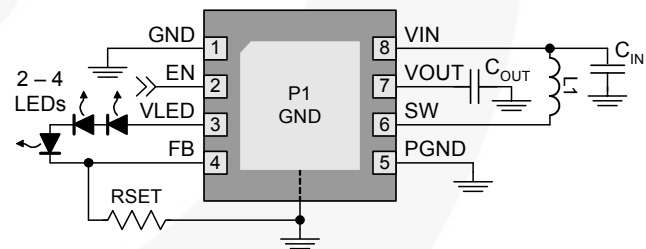


Figure 1. Typical Application

Ordering Information

| Part Number | Operating Temperature Range | Package | Packing |
|--------------------------|-----------------------------|--------------------------------------------------------------|---------------|
| FAN5340UCX | -40 to 85°C | 8-Bump, 1.57 x 1.57mm Wafer Level Chip-Scale Package (WLCSP) | Tape and Reel |
| FAN5340MPX (Preliminary) | -40 to 85°C | 8-Lead, 3.00 x 3.00mm Molded Leadless Package (MLP) | Tape and Reel |

Block Diagrams

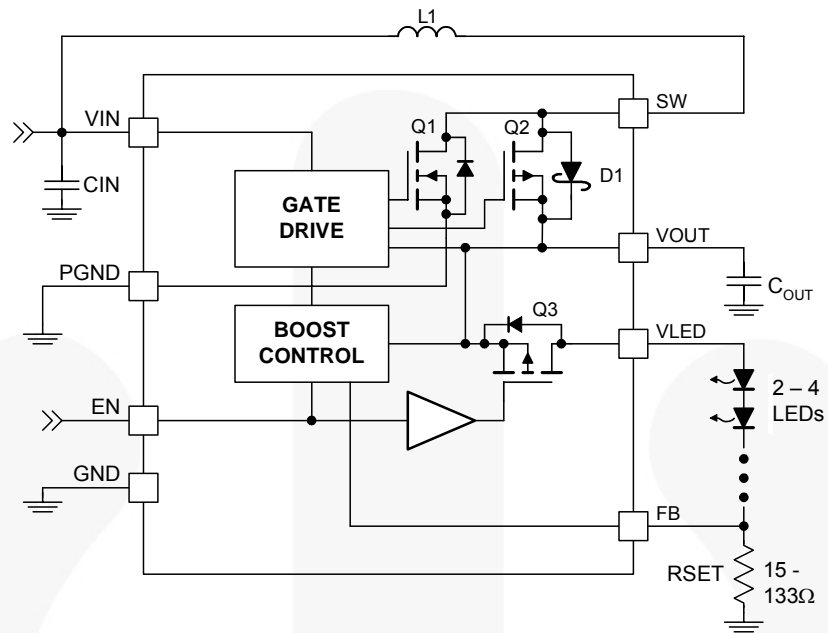


Figure 2. Block Diagram

Table 1. Recommended External Components

| Component | Description | Vendor | Parameter | Min. | Typ. | Max. | Units |
|------------------|---------------------------|--------------------------|------------------|------|------|------|------------|
| L1 | 22 μ H Nominal | Murata LQH3NPN220MGOK | L ⁽¹⁾ | | 22 | | μ H |
| | | | DCR (Series R) | | 4.7 | | m Ω |
| C _{OUT} | 4.7 μ F X5R or Better | | C | | 4.7 | | μ F |
| C _{IN} | 4.7 μ F X5R or Better | | C | | 4.7 | | μ F |

Note:

1. Minimum L (inductance) incorporates tolerance, temperature, and DC bias effects (L decreases with increasing current).

Pin Configuration




Figure 3. WLCSP Package, Top View




Figure 4. WLCSP Package, Bottom View

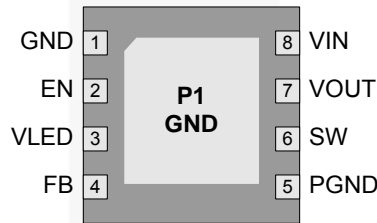


Figure 5. 8-Pin 3 x 3mm MLP, Top View

Pin Definitions

| Pin # | | Name | Description |
|-------|-----|------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| CSP | MLP | | |
| A1 | 1 | GND | Analog Ground. All signals are referenced to this pin. |
| A2 | 2 | EN | Enable / PWM Brightness Control. A logic LOW on this pin shuts down the IC, disconnects the LEDs from VOUT, and reduces the current consumption of the IC. This terminal has an internal pull-down resistor of 300kΩ. |
| A3 | 3 | VLED | LED String Output. Connected to the anode of a series string of two to four LEDs. |
| B3 | 4 | FB | Current Feedback. The boost regulator regulates this pin to 0.5V to control the LED string current. Tie this pin via a current-setting resistor (R_{SET}) to GND and the cathode of the LED string. |
| C3 | 5 | PGND | Power Ground. The boost switch and gate drivers are grounded at this pin. |
| C2 | 6 | SW | Switching Node. Tie inductor L1 from V_{IN} to this pin. |
| C1 | 7 | VOUT | Boost Output Voltage. Output of the boost regulator. |
| B1 | 8 | VIN | Input Voltage. |

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

| Symbol | Parameter | Min. | Max. | Units | |
|------------------|------------------------------------------|--------------------------------------|----------------|-------|----|
| V_{IN} | VIN | -0.3 | 6.0 | V | |
| V_{FB}, V_{EN} | FB, EN Pins | -0.3 | $V_{IN} + 0.3$ | V | |
| V_{SW} | SW Pin | -0.3 | 24.0 | V | |
| V_{OUT} | VOUT Pin | -0.3 | 24.0 | V | |
| ESD | Electrostatic Discharge Protection Level | Human Body Model per JESD22-A114 | 4.0 | | kV |
| | | Charged Device Model per JESD22-C101 | 1.5 | | |
| T_J | Junction Temperature | -40 | +150 | °C | |
| T_{STG} | Storage Temperature | -65 | +150 | °C | |
| T_L | Lead Soldering Temperature, 10 Seconds | | +260 | °C | |

Recommended Operating Conditions

The Recommended Operating Conditions table defines the conditions for actual device operation. Recommended operating conditions are specified to ensure optimal performance to the datasheet specifications. Fairchild does not recommend exceeding them or designing to absolute maximum ratings.

| Symbol | Parameter | Min. | Typ. | Max. | Units |
|---------------|------------------------------|------|------|------|-------|
| V_{IN} | VIN Supply Voltage | 2.7 | | 4.8 | V |
| V_{OUT} | VOUT Voltage | 6.2 | | 16.0 | V |
| I_{OUT} | VOUT Load Current | 5 | | 40 | mA |
| f_{EN_PWM} | EN pin PWM Dimming Frequency | 100 | 300 | 1000 | Hz |
| T_A | Ambient Temperature | -40 | | +85 | °C |
| T_J | Junction Temperature | -40 | | +125 | °C |

Thermal Properties

Junction-to-ambient thermal resistance is a function of application and board layout. This data is measured with four-layer 2s2p evaluation boards in accordance to JEDEC standard JESD51. Special attention must be paid not to exceed junction temperature $T_{J(max)}$ at a given ambient temperature T_A .

| Symbol | Parameter | Typ. | Units |
|---------------|----------------------------------------|---------------|----------|
| θ_{JA} | Junction-to-Ambient Thermal Resistance | WLCSP Package | 110 °C/W |
| | | MLP Package | 49 °C/W |

Electrical Specifications

$V_{IN} = 2.7V$ to $4.8V$ and $T_A = -40^{\circ}C$ to $+85^{\circ}C$ unless otherwise noted. Typical values are at $T_A = 25^{\circ}C$ and $V_{IN} = 3.6V$.

| Symbol | Parameter | Conditions | Min. | Typ. | Max. | Units |
|-------------------------------|---------------------------------------------|---------------------------------------------------------------|------|----------------|------|-------------|
| Power Supplies | | | | | | |
| I_Q | Quiescent Current | EN = V_{IN} , Device Not Switching | | | 1 | mA |
| I_{SD} | Shutdown Supply Current | EN = GND, $V_{IN} = 3.6V$ | | 0.3 | 1.0 | μA |
| V_{UVLO} | Under-Voltage Lockout | V_{IN} Rising | 2.30 | 2.40 | 2.50 | V |
| | | V_{IN} Falling | 2.00 | 2.15 | 2.25 | V |
| V_{UVHYST} | Under-Voltage Lockout Hysteresis | | | 250 | | mV |
| EN: Enable Pin | | | | | | |
| V_{IH} | HIGH-Level Input Voltage | | 1.2 | | | V |
| V_{IL} | LOW-Level Input Voltage | | | | 0.4 | V |
| R_{EN} | EN Pull-Down Resistance | | 200 | 300 | 400 | $k\Omega$ |
| t_{SD} | EN Low to Shutdown Delay | From Falling Edge of EN | 20 | | 80 | ms |
| Feedback and Reference | | | | | | |
| V_{FB} | Feedback Voltage | | 480 | 500 | 520 | mV |
| I_{FB} | Feedback Input Current | $V_{FB} = 500mV$ | | 0.1 | 1.0 | μA |
| Power Outputs | | | | | | |
| $R_{DS(ON)_Q1}$ | Boost Switch On-Resistance | $V_{IN} = 3.6V, V_{OUT} = 10V, I_{SW} = 100mA$ | | 600 | | m Ω |
| | | $V_{IN} = 2.7V, V_{OUT} = 10V, I_{SW} = 100mA$ | | 850 | | |
| $R_{DS(ON)_Q2}$ | Synchronous Rectifier On-Resistance | $V_{OUT} = 10V, I_{SW} = 100mA$ | | 2.0 | | Ω |
| $R_{DS(ON)_Q3}$ | Load Switch On-Resistance | $V_{OUT} = 10V, I_{LED} = 10mA$ | | 2.8 | | Ω |
| $I_{SW(OFF)}$ | SW Node Leakage ⁽²⁾ | EN = 0, $V_{IN} = V_{SW} = V_{OUT} = 5.5V$, $V_{LED} = 0$ | | 0.1 | 1.0 | μA |
| I_{LIM-PK} | Boost Switch Peak Current Limit | $V_{IN} = 3.6V$ | 325 | 400 | 475 | mA |
| Oscillator | | | | | | |
| f_{SW} | Boost Regulator Switching Frequency | | 1.0 | 1.2 | 1.4 | MHz |
| PWM Dimming | | | | | | |
| D_{PWM} | PWM Duty Cycle ⁽³⁾ | PWM Dimming Frequency $\leq 1kHz$ | 1.0 | | 100 | % |
| Output and Protection | | | | | | |
| V_{OVP} | Boost Output Over-Voltage Protection | | 18.0 | 19.0 | 20.0 | V |
| $V_{OVPHYST}$ | OVP Hysteresis | | | 0.8 | | V |
| V_{THSC} | V_{LED} Short-Circuit Detection Threshold | V_{OUT} Falling | | $V_{IN} - 1.5$ | | V |
| | | V_{OUT} Rising | | $V_{IN} - 1.3$ | | V |
| D_{MAX} | Maximum Boost Duty Cycle ⁽³⁾ | | 85 | | | % |
| D_{MIN} | Minimum Boost Duty Cycle ⁽³⁾ | | | | 20 | % |
| T_{SD} | Thermal Shutdown | | | 150 | | $^{\circ}C$ |
| T_{HYS} | Thermal Shutdown Hysteresis | | | 25 | | $^{\circ}C$ |

Notes:

- SW leakage current includes the leakage current of three internal switches; SW to GND, V_{OUT} to V_{LED} , and SW to V_{OUT} .
- Guaranteed by design.

Typical Characteristics

$V_{IN} = 3.6V$, $T_A = 25^\circ C$, $I_{LED} = 20mA$, $L = 22\mu H$, $C_{OUT} = 4.7\mu F$.

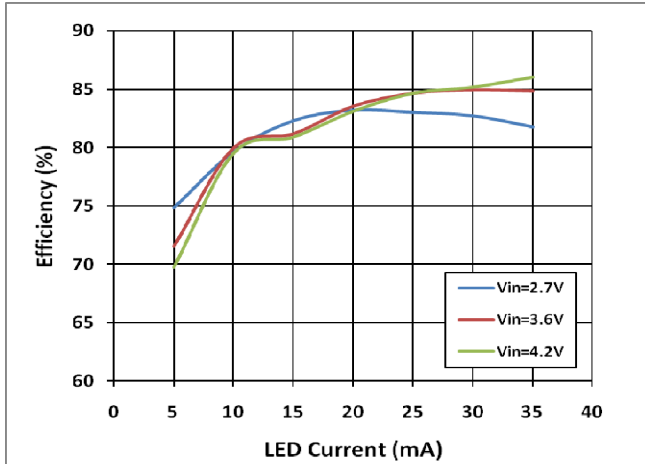


Figure 6. Efficiency vs. LED Current: Two LEDs

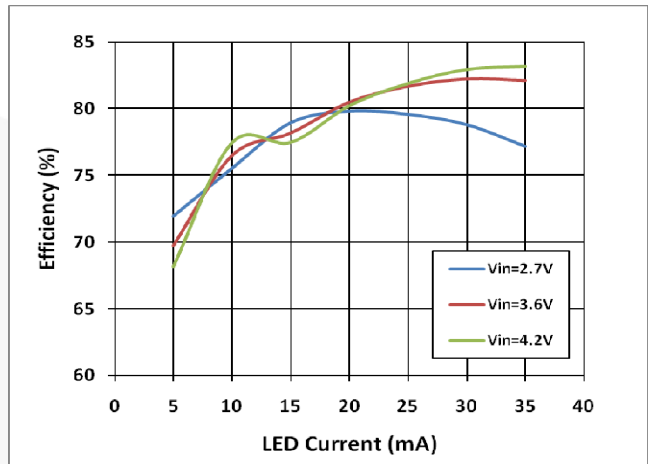


Figure 7. Efficiency vs. LED Current: Three LEDs

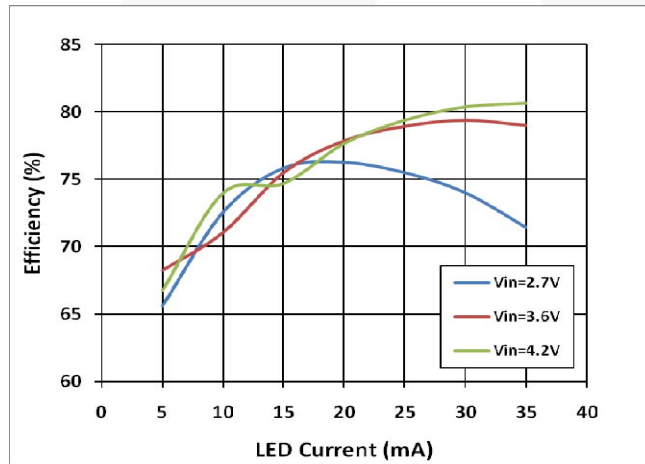


Figure 8. Efficiency vs. LED Current: Four LEDs

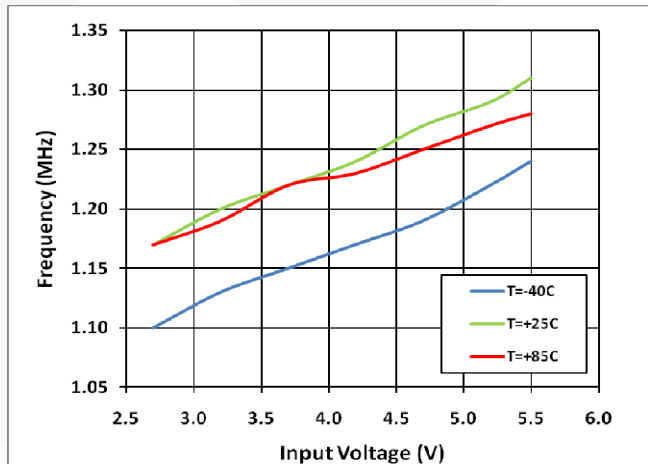


Figure 9. f_{sw} vs. Input Voltage vs. Temperature

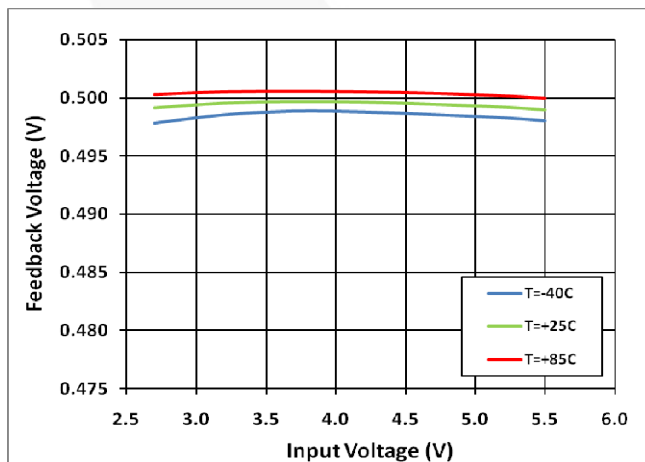


Figure 10. FB Voltage vs. Input Voltage vs. Temperature

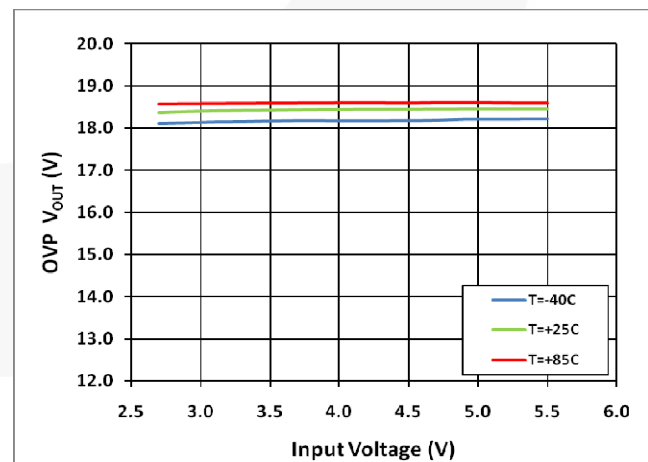


Figure 11. OVP vs. Input Voltage vs. Temperature

Typical Characteristics (Continued)

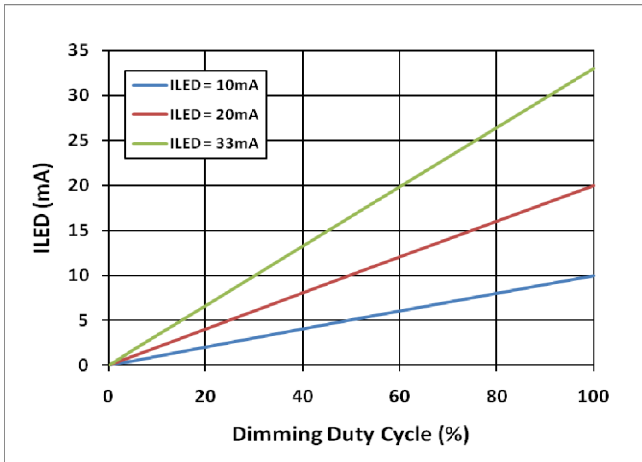


Figure 12. PWM Linearity Over Full Dimming Duty Cycle Range, Four LEDs

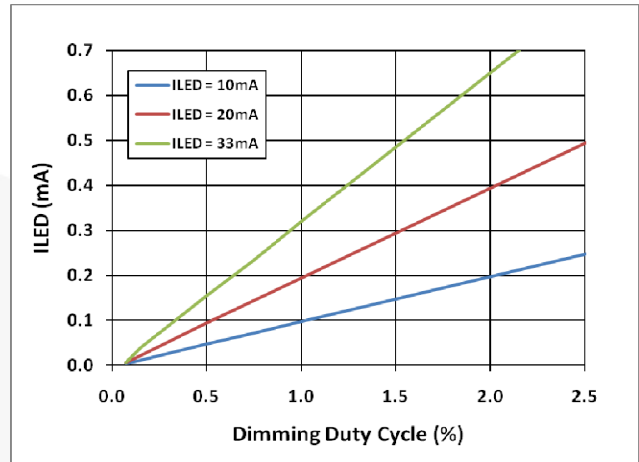


Figure 13. PWM Linearity with Dimming Duty Cycle <2.5%, Four LEDs

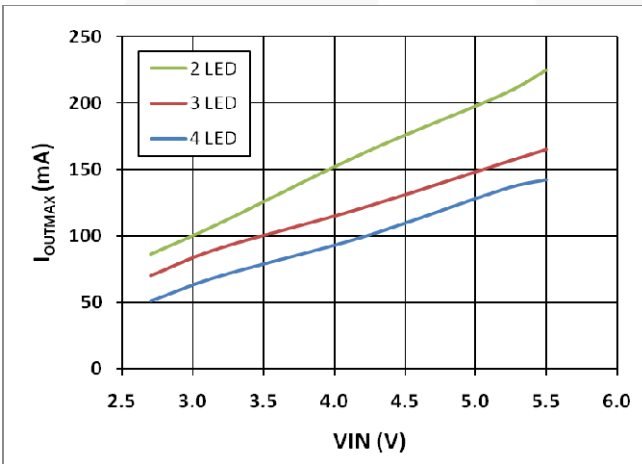


Figure 14. Maximum Output Current at V_{OUT}

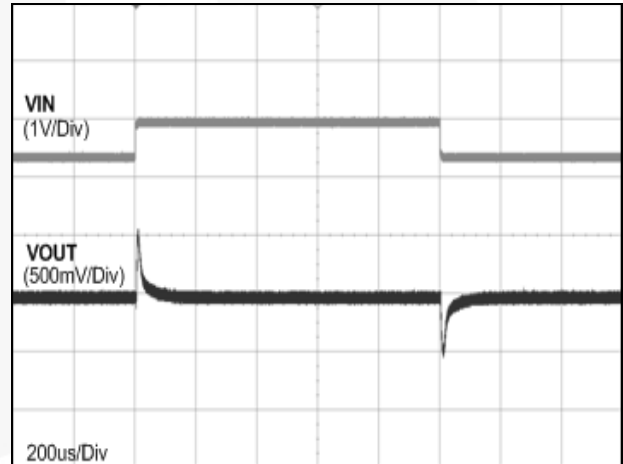


Figure 15. Line Transient with 10µs Line Step, Four LEDs

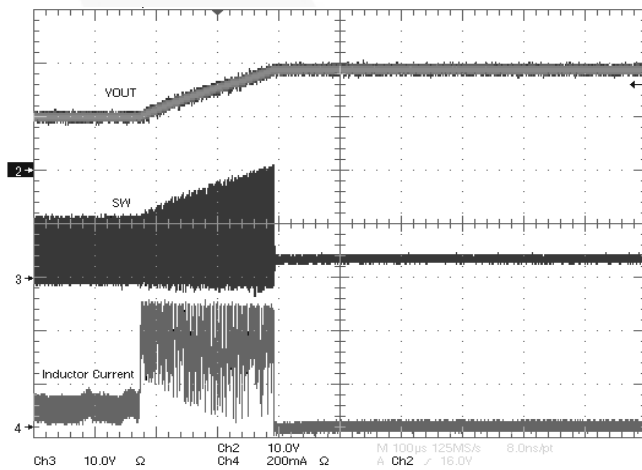


Figure 16. Over-Voltage Protection: Soft-Start into Open LED String

Typical Characteristics (Continued)

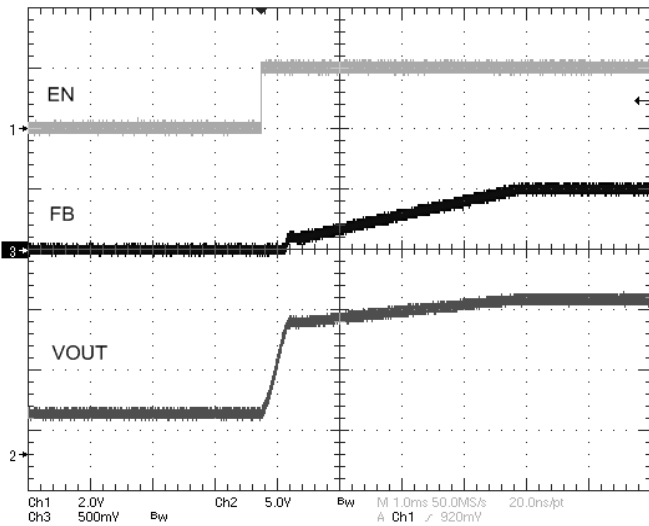


Figure 17. Cold-Start Waveform with 100% Duty Cycle at 1ms/Div.

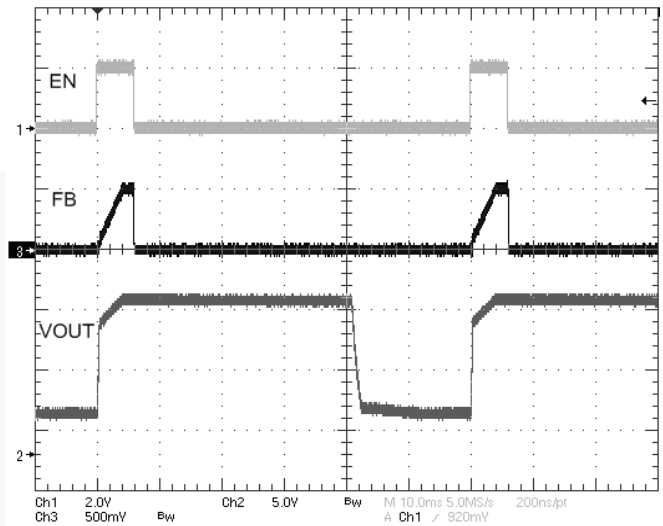


Figure 18. Cold-Start Waveform with 100% Duty Cycle Showing Startup, Shutdown and Startup at 10ms/Div

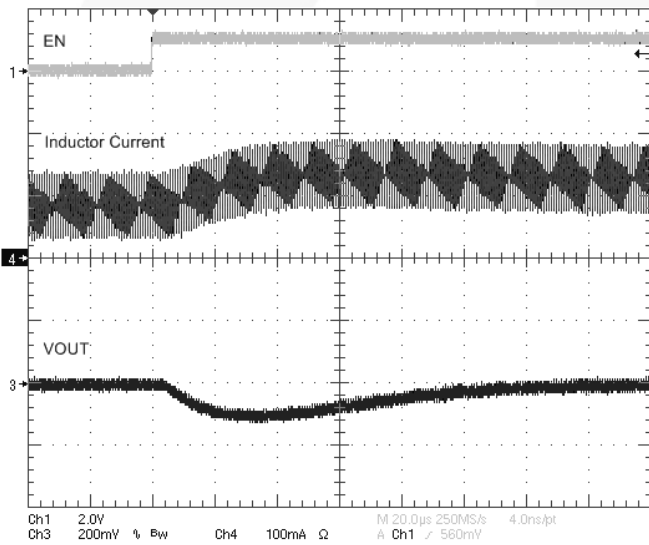


Figure 19. FAN5340 I_{LOAD} Step from 20mA to 30mA by Enabling FAN5640 at 10mA, Three LEDs

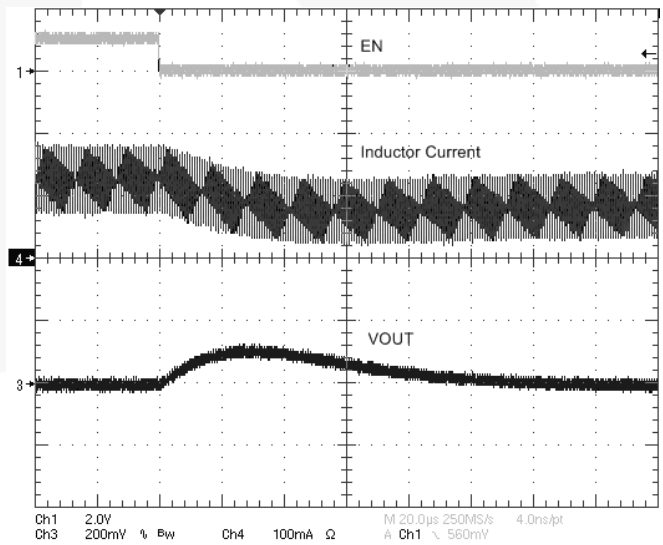


Figure 20. FAN5340 I_{LOAD} Step from 30mA to 20mA by Disabling FAN5640 at 10mA, Three LEDs



Circuit Description

Overview

The FAN5340 is an inductive current-mode boost serial LED driver that achieves LED current regulation by maintaining 0.5V across R_{SET} . The current through the LED string (I_{LED}) is therefore:

$$I_{LED} = \frac{0.5}{R_{SET}} \quad (1)$$

While the forward-voltage across the LEDs determines V_{OUT} , the FAN5340's boost regulator output can also support additional loads on V_{OUT} (see Figure 21) provided its input current limit is not exceeded.

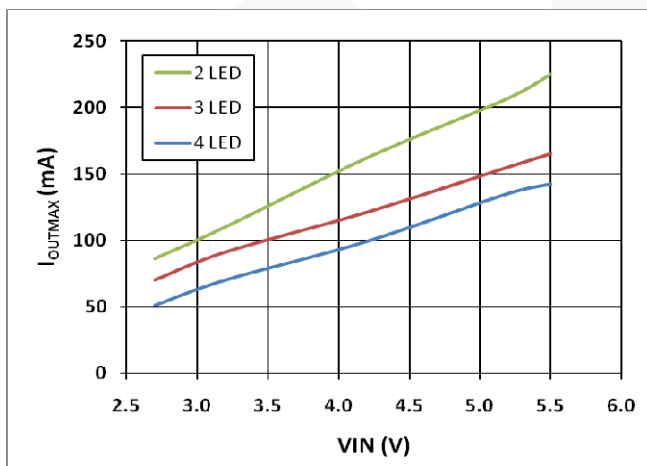


Figure 21. Maximum Output Current vs. Input Voltage

UVLO and Soft-Start

If EN has been LOW for more than 20ms, the IC initiates a “cold start” soft-start cycle when EN rises, provided V_{IN} is above the UVLO threshold. The soft-start circuit ramps the voltage reference to the error amplifier to control inrush current.

PWM Dimming

When EN goes LOW, the IC turns off a MOSFET (Q3 in Figure 2), which disconnects the LED load, preventing C_{OUT} from being discharged when EN is LOW. As long as EN is low for less than 20ms, the regulator's main regulation loop quickly regains control when EN returns to a HIGH state.

Short-Circuit Detection

If V_{OUT} falls below $V_{IN} - 1.5V$, Q3 turns off and remains off until V_{OUT} recovers to at least $V_{IN} - 1.3V$.

Over-Voltage Protection

If the LED string is open circuit, FB remains at 0V and the output voltage continues to increase in the absence of an Over-Voltage Protection (OVP) circuit. The FAN5340's OVP circuit disables the boost regulator when V_{OUT} exceeds 19.0V and continues to keep the regulator off until V_{OUT} drops below 18.2V.

Thermal Shutdown

If the die temperature exceeds 150°C, a reset occurs and remains in effect until the die cools to 125°C, at which time the circuit is allowed to begin the soft-start sequence.

Applications

Using VOUT to Drive Additional LED Strings

The VOUT pin can be used as a supply for simple current sources (shown in Figure 22 using the FAN5640) or discrete current sinks. To avoid dragging V_{OUT} down when the EN pin is LOW, the auxiliary strings should not be enabled unless the EN pin is HIGH. The auxiliary strings can therefore be PWM dimmed using either the same line as the EN line as shown below or enabled separately, but within the on-time of the FAN5340.






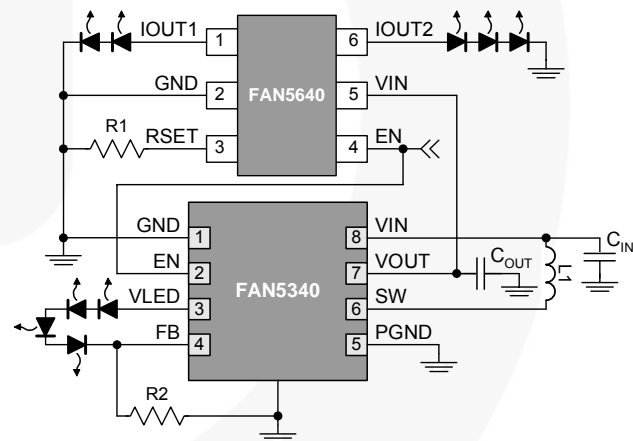


Figure 22. Driving Additional LED Strings

If using VOUT to drive additional loads, care should be taken not to exceed the input current limit. This limitation is shown in Figure 21 for a typical IC. The total load ($I_{OUT1} + I_{OUT2} + I_{LED}$) should always remain below 70% of the value in Figure 21.

Physical Dimensions

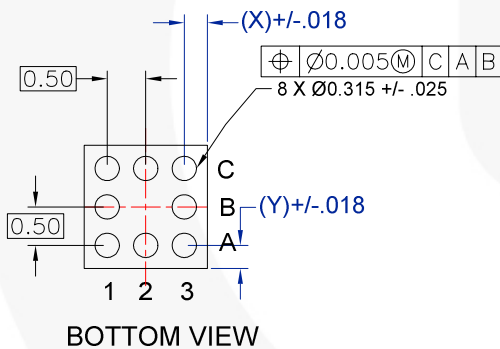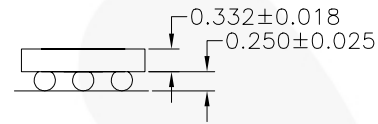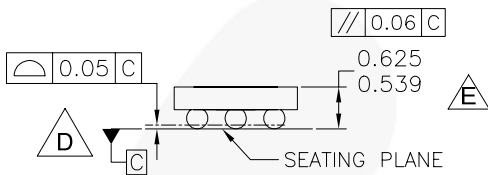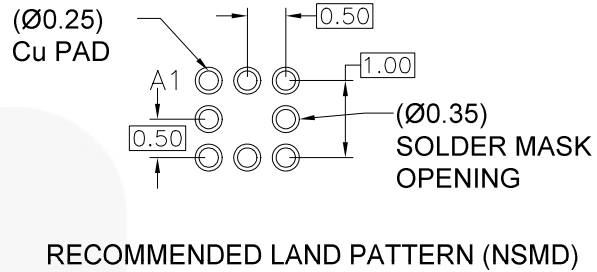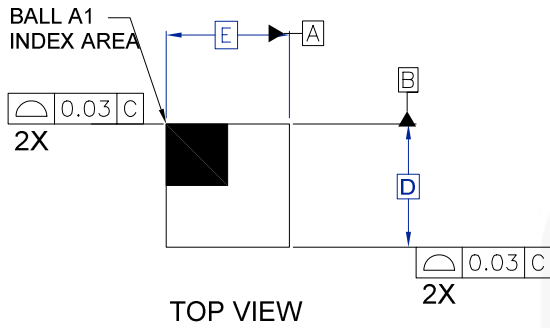

NOTES:

- A. NO JEDEC REGISTRATION APPLIES.
- B. DIMENSIONS ARE IN MILLIMETERS.
- C, DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994
- D. DATUM C, THE SEATING PLANE, IS DEFINED BY THE SPHERICAL CROWNS OF THE BALLS.
- E. PACKAGE TYPICAL HEIGHT IS 582 MICRONS ± 43 MICRONS (539-625 MICRONS).
- F. FOR DIMENSIONS D, E, X, AND Y SEE PRODUCT DATASHEET.
- G. BALL COMPOSITION: Sn95.5-Ag3.9-Cu0.6
- I. DRAWING FILENAME: MKT-UC008ABrev2.

Product-Specific Dimensions


| Product | D | E | X | Y |
|-----------|-------|-------|-------|-------|
| FAN5340UC | 1.570 | 1.570 | 0.285 | 0.285 |

Figure 23. 8-Bump, 1.57 x 1.57mm Wafer Level Chip-Scale Package (WLCSP)

Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:
<http://www.fairchildsemi.com/packaging/>

Physical Dimensions (Continued)

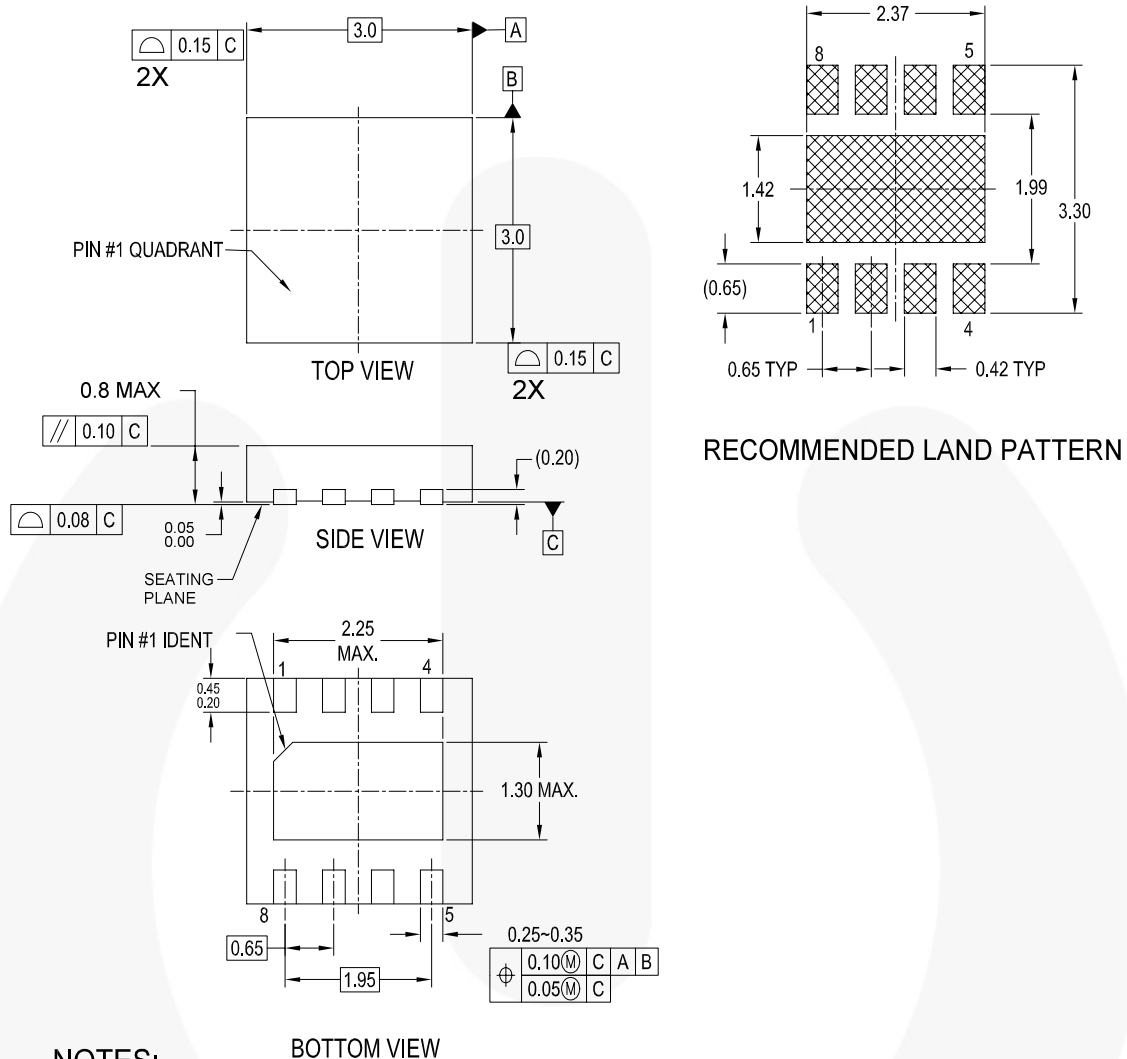

NOTES:

- A. CONFORMS TO JEDEC REGISTRATION MO-229, VARIATION VEEC, DATED 11/2001
- B. DIMENSIONS ARE IN MILLIMETERS.
- C. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994
- D. FILENAME: MKT-MLP08Drev2

Figure 24. 8-Pin, 3 x 3mm Molded Leadless Package (MLP)




Package drawings are provided as a service to customers considering Fairchild components. Drawings may change in any manner without notice. Please note the revision and/or date on the drawing and contact a Fairchild Semiconductor representative to verify or obtain the most recent revision. Package specifications do not expand the terms of Fairchild's worldwide terms and conditions, specifically the warranty therein, which covers Fairchild products.

Always visit Fairchild Semiconductor's online packaging area for the most recent package drawings:
<http://www.fairchildsemi.com/packaging/>



TRADEMARKS

The following includes registered and unregistered trademarks and service marks, owned by Fairchild Semiconductor and/or its global subsidiaries, and is not intended to be an exhaustive list of all such trademarks.

- | | | | |
|-----------------------------------------------------------------------------------|------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| AccuPower™ | F-PFST™ | Power-SPM™ |  SYSTEM GENERAL The Power Franchise®  the power franchise TinyBoost™ TinyBuck™ TinyCalc™ TinyLogic™ TINYOPTO™ TinyPower™ TinyPWM™ TinyWire™ TriFault Detect™ TRUECURRENT™* µSerDes™  SerDes UHC® Ultra FRFET™ UniFET™ VCX™ VisualMax™ XS™ |
| Auto-SPM™ | FRFET® | PowerTrench® | |
| Build it Now™ | Global Power Resource™ | PowerXS™ | |
| CorePLUS™ | Green FPS™ | Programmable Active Droop™ | |
| CorePOWER™ | Green FPS™ e-Series™ | QFET® | |
| CROSSVOLT™ | Gmax™ | QST™ | |
| CTL™ | GTO™ | Quiet Series™ | |
| Current Transfer Logic™ | IntelliMAX™ | RapidConfigure™ | |
| DEUXPEED® | ISOPLANAR™ |  | |
| Dual Cool™ | MegaBuck™ | Saving our world, 1mW/W/kW at a time™ | |
| EcoSPARK® | MICROCOUPLER™ | SignalWise™ | |
| EfficientMax™ | MicroFET™ | SmartMax™ | |
| ESBC™ | MicroPak™ | SMART START™ | |
|  | MicroPak2™ | SPM® | |
| Fairchild® | MillerDrive™ | STEALTH™ | |
| Fairchild Semiconductor® | MotionMax™ | SuperFET™ | |
| FACT Quiet Series™ | Motion-SPM™ | SuperSOT™-3 | |
| FACT® | OptoHiT™ | SuperSOT™-6 | |
| FAST® | OPTOLOGIC® | SuperSOT™-8 | |
| FastvCore™ | OPTOPLANAR® | SupreMOS™ | |
| FETBench™ | | SyncFET™ | |
| FlashWriter® | | Sync-Lock™ | |
| FPS™ | PDP SPM™ | | |

* Trademarks of System General Corporation, used under license by Fairchild Semiconductor.

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION, OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS. THESE SPECIFICATIONS DO NOT EXPAND THE TERMS OF FAIRCHILD'S WORLDWIDE TERMS AND CONDITIONS, SPECIFICALLY THE WARRANTY THEREIN, WHICH COVERS THESE PRODUCTS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION.

As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support, device, or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

ANTI-COUNTERFEITING POLICY

Fairchild Semiconductor Corporation's Anti-Counterfeiting Policy. Fairchild's Anti-Counterfeiting Policy is also stated on our external website, www.fairchildsemi.com, under Sales Support.

Counterfeiting of semiconductor parts is a growing problem in the industry. All manufacturers of semiconductor products are experiencing counterfeiting of their parts. Customers who inadvertently purchase counterfeit parts experience many problems such as loss of brand reputation, substandard performance, failed applications, and increased cost of production and manufacturing delays. Fairchild is taking strong measures to protect ourselves and our customers from the proliferation of counterfeit parts. Fairchild strongly encourages customers to purchase Fairchild parts either directly from Fairchild or from Authorized Fairchild Distributors who are listed by country on our web page cited above. Products customers buy either from Fairchild directly or from Authorized Fairchild Distributors are genuine parts, have full traceability, meet Fairchild's quality standards for handling and storage and provide access to Fairchild's full range of up-to-date technical and product information. Fairchild and our Authorized Distributors will stand behind all warranties and will appropriately address any warranty issues that may arise. Fairchild will not provide any warranty coverage or other assistance for parts bought from Unauthorized Sources. Fairchild is committed to combat this global problem and encourage our customers to do their part in stopping this practice by buying direct or from authorized distributors.

PRODUCT STATUS DEFINITIONS

Definition of Terms

| Datasheet Identification | Product Status | Definition |
|--------------------------|-----------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Advance Information | Formative / In Design | Datasheet contains the design specifications for product development. Specifications may change in any manner without notice. |
| Preliminary | First Production | Datasheet contains preliminary data; supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve design. |
| No Identification Needed | Full Production | Datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice to improve the design. |
| Obsolete | Not In Production | Datasheet contains specifications on a product that is discontinued by Fairchild Semiconductor. The datasheet is for reference information only. |

Rev. 148

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local
Sales Representative