



2SB776

PNP PLANAR TRANSISTOR


MEDIUM POWER LOW VOLTAGE TRANSISTOR

DESCRIPTION

The UTC **2SB776** is a medium power low voltage transistor, designed for audio power amplifier, DC-DC converter and voltage regulator.

FEATURES

- * High Current Output Up to 3A
- * Low Saturation Voltage
- * Complement to 2SD886

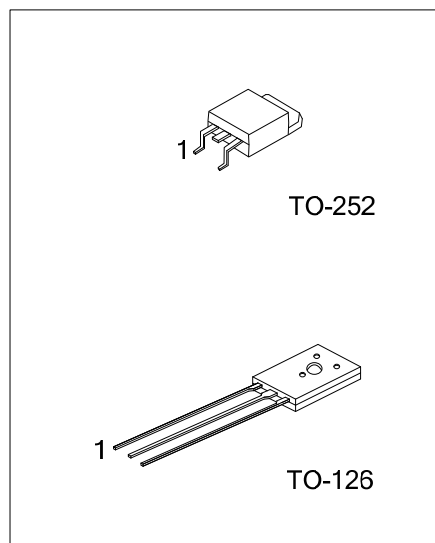

ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
2SB776L-x-T60-K	2SB776G-x-T60-K	TO-126	E	C	B	Bulk
2SB776L-x-TN3-R	2SB776G-x-TN3-R	TO-252	B	C	E	Tape Reel

Note: Pin Assignment: E: Emitter C: Collector B: Base

2SB776G-x-T60-K (1) Packing Type (2) Package Type (3) Rank (4) Green Package	(1) K: Bulk, R: Tape Reel (2) T60: TO-126, TN3: TO-252 (3) x: refer to Classification of h_{FE2} (4) L: Lead Free, G: Halogen Free and Lead Free
---	---

MARKING

TO-126	TO-252
UTC □□□□ 2SB776 □ 1 → Data Code → L: Lead Free → G: Halogen Free	UTC 2SB776 □ □□□□□ 1 → L: Lead Free → G: Halogen Free → Data Code ← Lot Code

■ ABSOLUTE MAXIMUM RATINGS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Collector-Base Voltage		V_{CBO}	-50	V
Collector-Emitter Voltage		V_{CEO}	-50	V
Emitter-Base Voltage		V_{EBO}	-5	V
Collector Current	DC	I_C	-3	A
	PULSE		-7	A
Base Current		I_B	-0.6	A
Collector Dissipation ($T_C=25^\circ\text{C}$)	TO-126	P_C	10	W
	TO-252		25	W
Junction Temperature		T_J	+150	$^\circ\text{C}$
Storage Temperature		T_{STG}	-55 ~ +150	$^\circ\text{C}$

Note: Absolute maximum ratings are those values beyond which the device could be permanently damaged.
Absolute maximum ratings are stress ratings only and functional device operation is not implied.

■ ELECTRICAL CHARACTERISTICS ($T_A=25^\circ\text{C}$, unless otherwise specified)

PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
Collector Cut-Off Current	I_{CBO}	$V_{CB}=-50\text{V}$, $I_E=0$			-1000	nA
Emitter Cut-Off Current	I_{EBO}	$V_{EB}=-3\text{V}$, $I_C=0$			-1000	nA
DC Current Gain (Note)	h_{FE1}	$V_{CE}=-2\text{V}$, $I_C=-20\text{mA}$	100	200		
	h_{FE2}	$V_{CE}=-2\text{V}$, $I_C=-1\text{A}$	100	150	400	
Collector-Emitter Saturation Voltage	$V_{CE(SAT)}$	$I_C=-2\text{A}$, $I_B=-0.2\text{A}$		-0.3	-0.5	V
Base-Emitter Saturation Voltage	$V_{BE(SAT)}$	$I_C=-2\text{A}$, $I_B=-0.2\text{A}$		-1.0	-2.0	V
Current Gain Bandwidth Product	f_T	$V_{CE}=-5\text{V}$, $I_C=-0.1\text{A}$		80		MHz
Output Capacitance	C_{ob}	$V_{CB}=-10\text{V}$, $I_E=0$, $f=1\text{MHz}$		45		pF


Note: Pulse test: $PW<300\mu\text{s}$, Duty Cycle $<2\%$

■ CLASSIFICATION OF h_{FE2}


RANK	Q	P	E
RANGE	100-200	160-320	200-400

■ TYPICAL CHARACTERISTICS


Static Characteristics

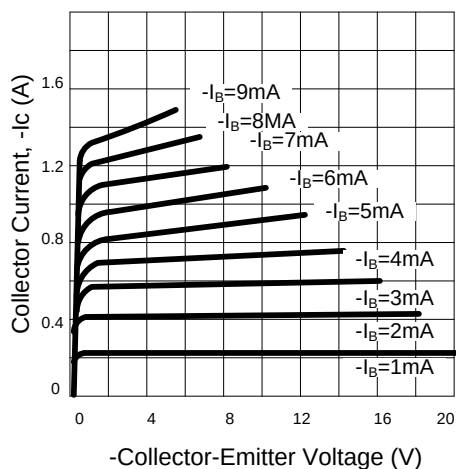


Derating Curve of Safe Operating Areas

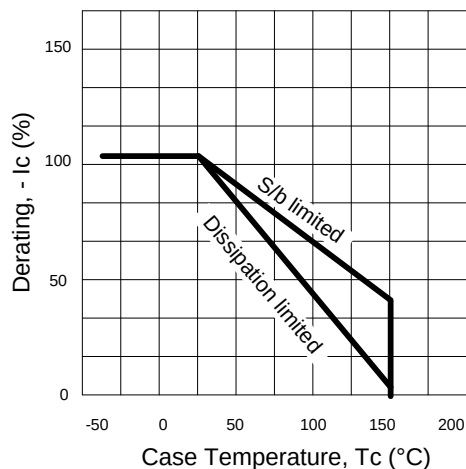


Current Gain-Bandwidth Product

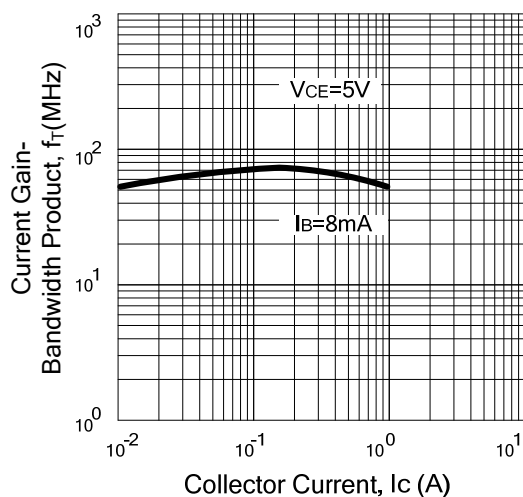


Safe Operating Area

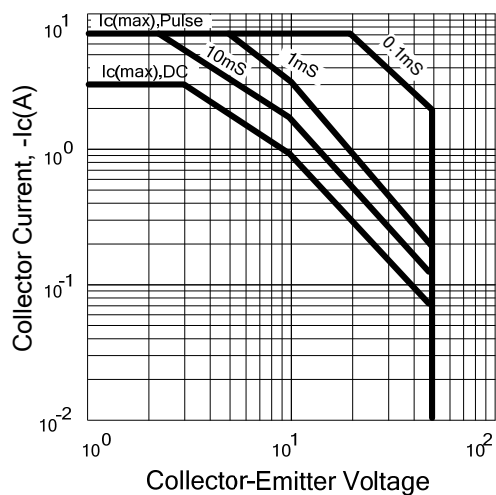


DC Current Gain

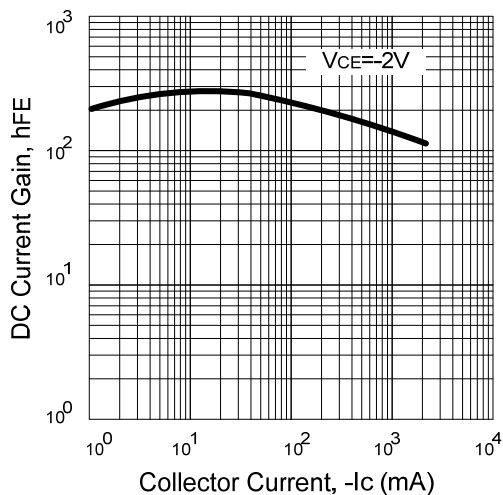

Saturation Voltage

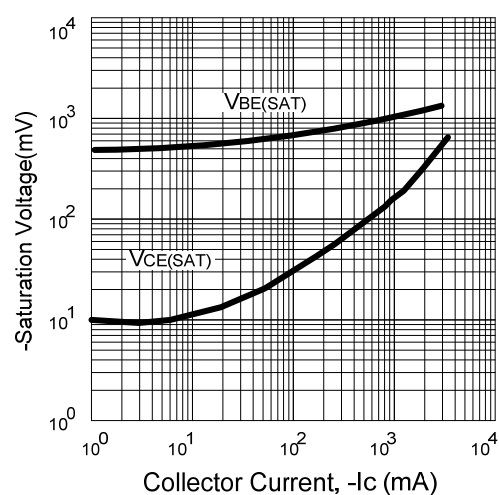

■ TYPICAL CHARACTERISTICS(Cont.)

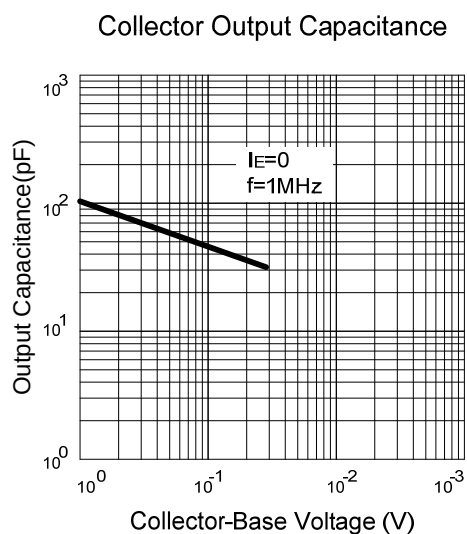

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.