



DESCRIPTION

The 2SB798-DL and 2SB798-DK are available in the SOT-89 package.

APPLICATIONS

- Switching and amplifying in various electrical and electronic circuits.

ORDERING INFORMATION

Package Type	Part Number
SOT-89	2SB798-DL
	2SB798-DK
SPQ	1,000pcs/Reel
AiT provides all RoHS Compliant Products	


h_{FE} CLASSIFICATION

Rank	Range
2SB798-DL	135 ~ 270
2SB798-DK	200 ~ 400

FEATURE

- Low Collector Saturation Voltage:
 $V_{CE(SAT)} < -0.5V$ ($I_C = -800mA$, $I_B = -80mA$)
- Complements to NPN type 2SD999

PIN DESCRIPTION

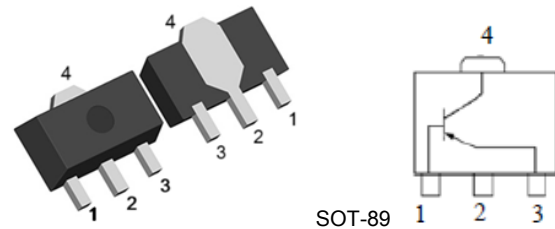

PIN#	DESCRIPTION
1	Base
2,4	Collector
3	Emitter

ABSOLUTE MAXIMUM RATINGS

$T_A = 25^\circ C$, unless otherwise specified.

V_{CBO} , Collector-Base Voltage	-30 V
V_{CEO} , Collector-Emitter Voltage	-25 V
V_{EBO} , Emitter-Base Voltage	-6 V
I_C , Collector Current-Continuous	-1.0 A
P_{tot} , Total power dissipation ($T_A = 25^\circ C$) ⁽¹⁾	-1 W
T_J , Junction Temperature	150 $^\circ C$
T_{stg} , Storage Temperature	-55 ~ +150 $^\circ C$

(1) Mounted on printed circuit board.

Stresses above may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other conditions beyond those indicated in the Electrical Characteristics are not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.



ELECTRICAL CHARACTERISTICS

$T_A = 25^\circ\text{C}$ unless otherwise specified.

Parameter	Symbols	Conditions	Min.	Typ.	Max.	Unit	
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -2\text{ mA}, I_B = 0$	-25	-	-	V	
Collector-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C = -100\text{ }\mu\text{A}, I_E = 0$	-30	-	-	V	
Emitter-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E = -100\text{ }\mu\text{A}, I_C = 0$	-6	-	-	V	
Collector Cutoff Current	I_{CBO}	$V_{CB} = -35\text{ V}, I_E = 0$	-	-	-100	nA	
DC Current Gain	h_{FE}	$V_{CE} = -1\text{ V}, I_C = -100\text{ mA}$	DL	135	-	270	-
			DK	200	-	400	
Collector-Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C = -800\text{ mA}, I_B = -80\text{ mA},$	-	-	-0.5	V	
Transition Frequency	f_T	$V_{CE} = 10\text{ V}, I_E = 50\text{ mA}$ $f = 100\text{ MHz}$	200	-	-	MHz	

TYPICAL CHARACTERISTICS

Fig 1. Collector Dissipation vs. Ambient Temperature

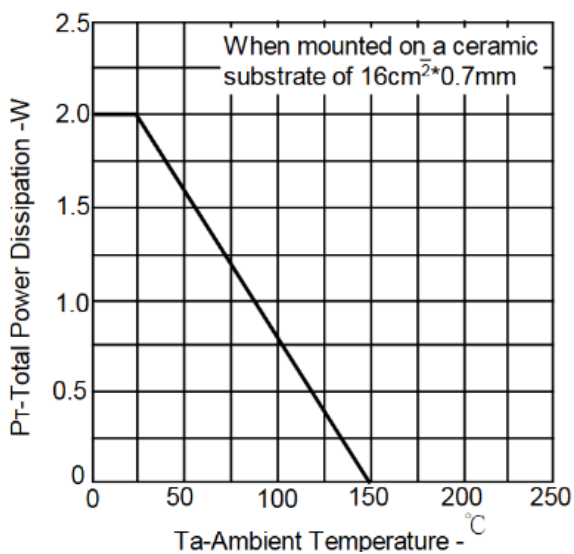


Fig 2. Collector Current vs. Base to Emitter Voltage

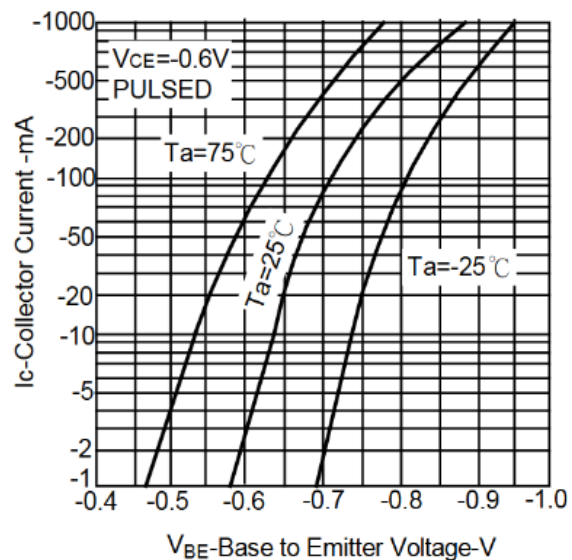




Fig 3. Collector Current vs.
Collector to Emitter Voltage

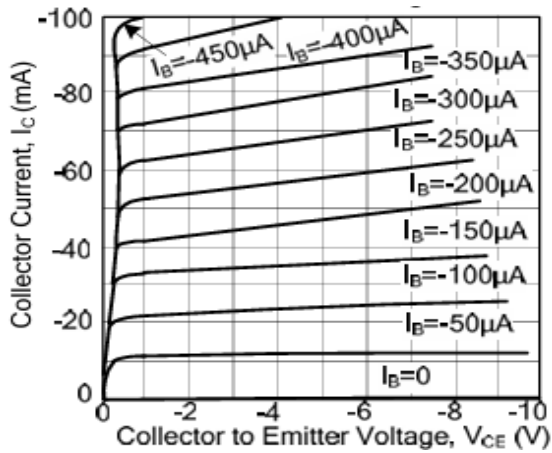


Fig 4. Collector Current vs.
Collector to Emitter Voltage

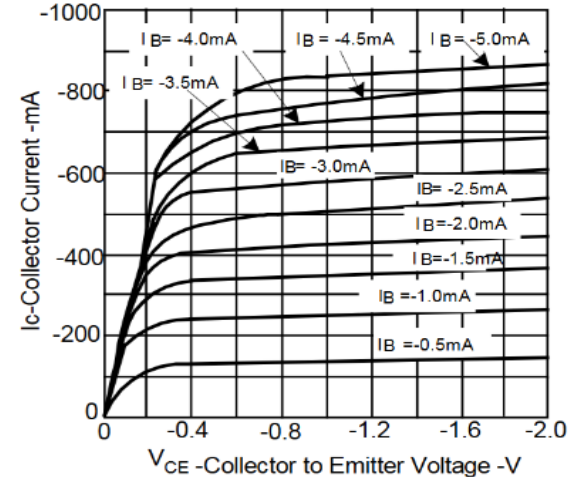


Fig 5. DC Current Gain vs. Collector Current

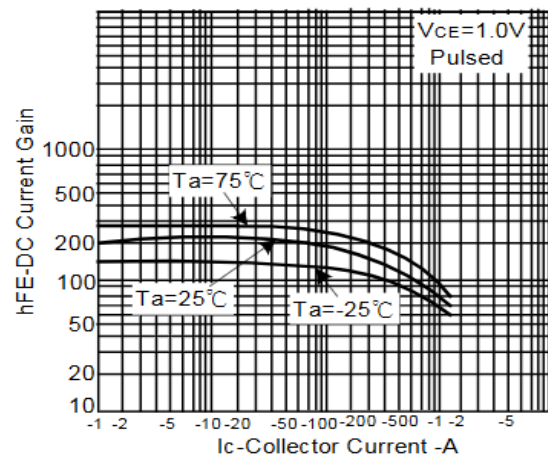


Fig 6. Collector and Base Saturation Voltage vs.
Collector Current

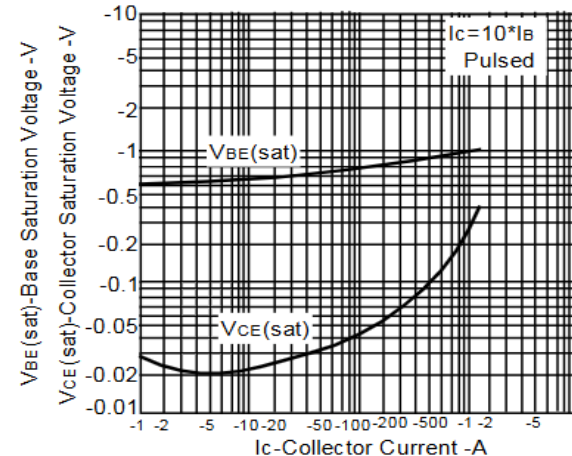


Fig 7. Gain Bandwidth Product vs. Emitter Current


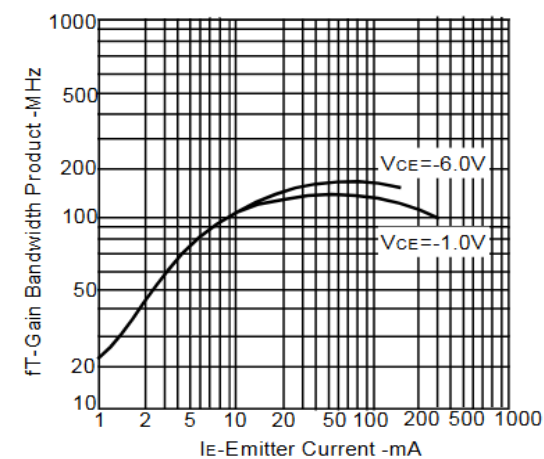



Fig 8. Output Capacitance vs.
Collector to Base Voltage



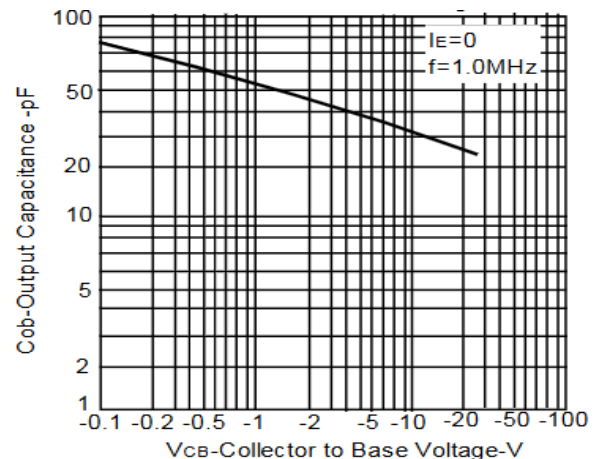

PACKAGE INFORMATION

Dimension in SOT-89 (Unit: mm)

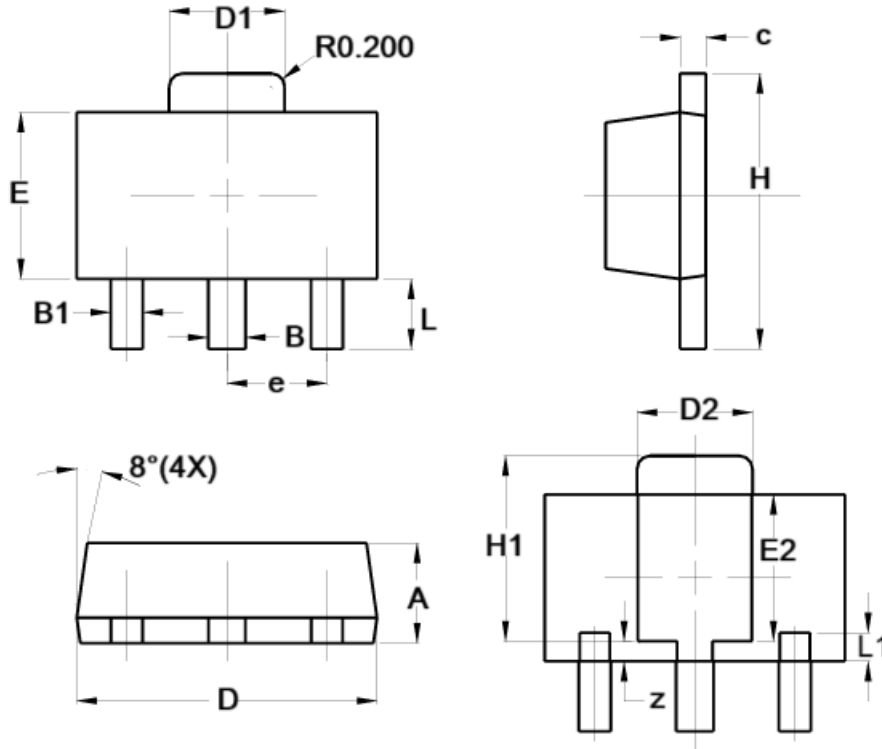

Symbol	Millimeter	
	Min.	Max.
A	1.400	1.600
B	0.500	0.620
B1	0.420	0.540
c	0.350	0.430
D	4.440	4.600
D1	1.620	1.830
D2	1.610	1.810
E	2.400	2.600
E2	2.050	2.350
e	1.500 TYP.	
H	3.950	4.250
H1	2.630	2.930
L	0.900	1.200
L1	0.327	0.527
z	0.200	0.400



IMPORTANT NOTICE

AiT Semiconductor Inc. (AiT) reserves the right to make changes to any its products, specifications, to discontinue any integrated circuit product or service without notice, and advises its customers to obtain the latest version of relevant information to verify, before placing orders, that the information being relied on is current.

AiT Semiconductor Inc. integrated circuit products are not designed, intended, authorized, or warranted to be suitable for use in life support applications, devices or systems or other critical applications. Use of AiT products in such applications is understood to be fully at the risk of the customer. As used herein may involve potential risks of death, personal injury, or server property, or environmental damage. In order to minimize risks associated with the customer's applications, the customer should provide adequate design and operating safeguards.

AiT Semiconductor Inc. assumes to no liability to customer product design or application support. AiT warrants the performance of its products of the specifications applicable at the time of sale.