


AUDIO FREQUENCY POWER AMPLIFIER APPLICATIONS.

FEATURES:

- Low Collector Saturation Voltage  
:  $V_{CE(sat)} = -1.0V$  (Max.) at  $I_C = -3A$ ,  $I_B = -0.3A$
- Collector Power Dissipation  
:  $P_C = 30W$  ( $T_c = 25^\circ C$ )
- Complementary to 2SD880.

MAXIMUM RATINGS ( $T_a = 25^\circ C$ )

CHARACTERISTIC		SYMBOL	RATING	UNIT
Collector-Base Voltage		$V_{CBO}$	-60	V
Collector-Emitter Voltage		$V_{CEO}$	-60	V
Emitter-Base Voltage		$V_{EBO}$	-7	V
Collector Current		$I_C$	-3	A
Base Current		$I_B$	-0.5	A
Collector Power Dissipation	$T_a = 25^\circ C$	$P_C$	1.5	W
	$T_c = 25^\circ C$		30	
Junction Temperature		$T_j$	150	$^\circ C$
Storage Temperature Range		$T_{stg}$	-55~150	$^\circ C$

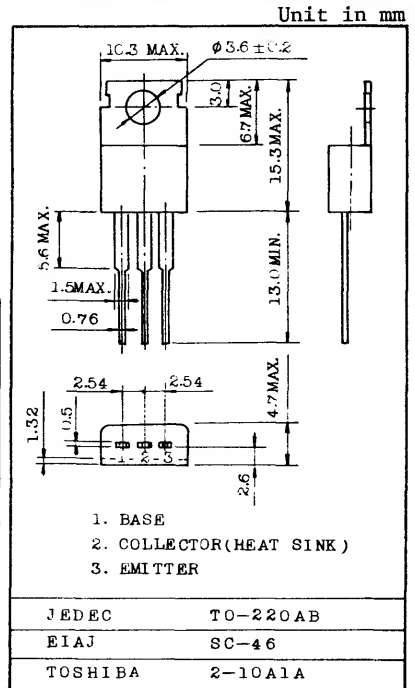

ELECTRICAL CHARACTERISTICS ( $T_a = 25^\circ C$ )

Mounting Kit No. AC75  
Weight : 1.9g

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Collector Cut-off Current		$I_{CBO}$	$V_{CB} = -60V$ , $I_E = 0$	-	-	-100	$\mu A$
Emitter Cut-off Current		$I_{EBO}$	$V_{EB} = -7V$ , $I_C = 0$	-	-	-100	$\mu A$
Collector-Emitter Breakdown Voltage		$V_{(BR)CEO}$	$I_C = -50mA$ , $I_B = 0$	-60	-	-	V
DC Current Gain	$h_{FE(1)}$ (Note)	$h_{FE(2)}$	$V_{CE} = -5V$ , $I_C = -0.5A$	60	-	200	
			$V_{CE} = -5V$ , $I_C = -3A$	20	-	-	
Collector-Emitter Saturation Voltage		$V_{CE(sat)}$	$I_C = -3A$ , $I_B = -0.3A$	-	-0.5	-1.0	V
Base-Emitter Voltage		$V_{BE}$	$V_{CE} = -5V$ , $I_C = -0.5A$	-	-0.7	-1.0	V
Transition Frequency		$f_T$	$V_{CE} = -5V$ , $I_C = -0.5A$	-	9	-	MHz
Collector Output Capacitance		$C_{ob}$	$V_{CB} = -10V$ , $I_E = 0$ , $f = 1MHz$	-	150	-	pF
Switching Time	Turn-on Time	$t_{on}$		-	0.4	-	$\mu s$
	Storage Time	$t_{stg}$		-	1.7	-	
	Fall Time	$t_f$		$-I_{B1} = I_{B2} = 0.2A$ DUTY CYCLE $\leq 1\%$	-	0.5	

Note:  $h_{FE(1)}$  Classification O: 60~120, Y: 100~200

