

2SB941

Rev.F Mar.-2016

描述 / Descriptions

TO-220F 塑封封装 PNP 半导体三极管。Silicon PNP transistor in a TO-220F Plastic Package.

特征 / Features

大电流 h_{FE} 曲线特性好、集电-发射极饱和压降小、采用 TO-220 全包封不需云母绝缘可直接安装散热片。

High forward current transfer ratio h_{FE} which has satisfactory linearity, low collector to emitter saturation voltage $V_{CE(sat)}$ Full-pack package which can be installed to the heat sink with one screw.

用途 / Applications

用于低功率放大。

For low-frequency power amplification.

内部等效电路 / Equivalent Circuit



引脚排列 / Pinning



PIN1 : Base PIN 2 : Collector PIN 3 : Emitter

放大及印章代码 / h_{FE} Classifications & Marking

| h_{FE} Classifications Symbol | Q | P |
|------------------------------------|--------|---------|
| h_{FE} Range | 70~150 | 120~250 |







极限参数 / Absolute Maximum Ratings(Ta=25°C)

| 参数 Parameter | 符号 Symbol | 数值 Rating | 单位 Unit |
|---------------------------------------|--------------|--------------|------------|
| Collector to Base Voltage | V_{CBO} | -60 | V |
| Collector to Emitter Voltage | V_{CEO} | -60 | V |
| Emitter to Base Voltage | V_{EBO} | -5.0 | V |
| Collector Current - Continuous | I_C | -3.0 | A |
| Collector Current – Continuous(Pulse) | I_{CP} | -5.0 | A |
| Collector Power Dissipation | P_C | 2.0 | W |
| Junction Temperature | T_j | 150 | °C |
| Storage Temperature Range | T_{stg} | -55~150 | °C |

电性能参数 / Electrical Characteristics(Ta=25°C)

| 参数 Parameter | 符号 Symbol | 测试条件 Test Conditions | 最小值 Min | 典型值 Typ | 最大值 Max | 单位 Unit |
|---|---------------|---|------------|------------|------------|------------|
| Collector to Emitter Breakdown Voltage | V_{CEO} | $I_C=-30mA$ $I_B=0$ | -60 | | | V |
| Collector Cut-Off Current | I_{CEO} | $V_{CE}=-30V$ $I_B=0$ | | | -300 | μA |
| Collector Cut-Off Current | I_{CES} | $V_{CE}=-60V$ $V_{BE}=0$ | | | -200 | μA |
| Emitter Cut-Off Current | I_{EBO} | $V_{EB}=-5V$ $I_C=0$ | | | -1 | mA |
| DC Current Gain | $h_{FE(1)}$ | $V_{CE}=-4.0V$ $I_C=-1.0A$ | 70 | | 250 | |
| | $h_{FE(2)}$ | $V_{CE}=-4.0V$ $I_C=-3.0A$ | 10 | | | |
| Collector to Emitter Saturation Voltage | $V_{CE(sat)}$ | $I_C=-3.0A$ $I_B=-0.375A$ | | | -1.2 | V |
| Base to Emitter Voltage | V_{BE} | $V_{CE}=-4V$ $I_C=-3A$ | | | -1.8 | V |
| Transition Frequency | f_T | $V_{CE}=-10V$ $I_C=-0.5A$ $f=10MHz$ | | 30 | | MHz |
| Turn-On Time | t_{on} | $I_C=-1A$ $I_{B1}=-0.1A$ $I_{B2}=0.1A$ | | 0.5 | | μS |
| Storage Time | t_{stg} | | | 1.2 | | μS |
| Fall Time | t_f | | | 0.3 | | μS |


电参数曲线图 / Electrical Characteristic Curve

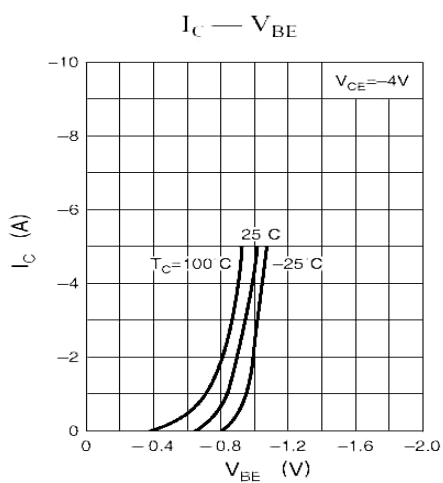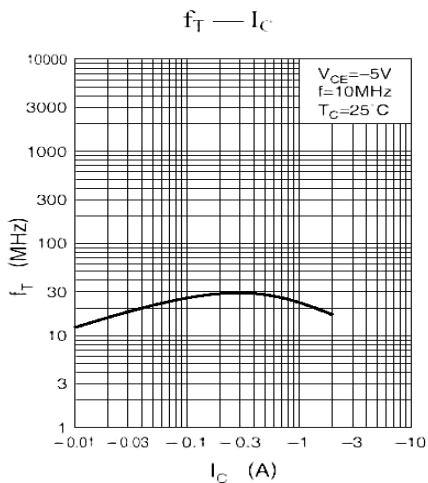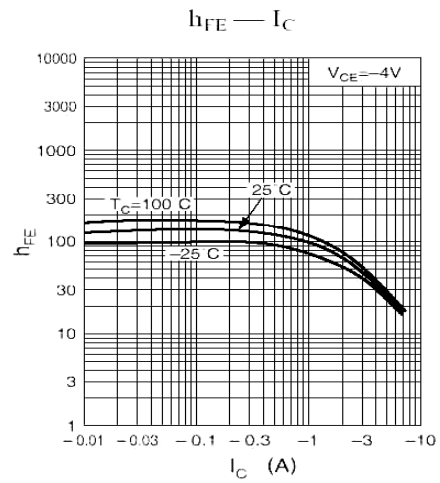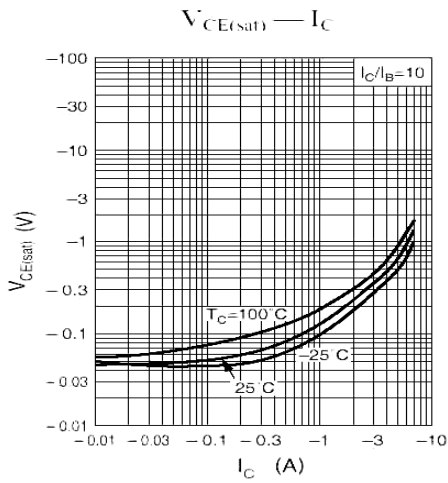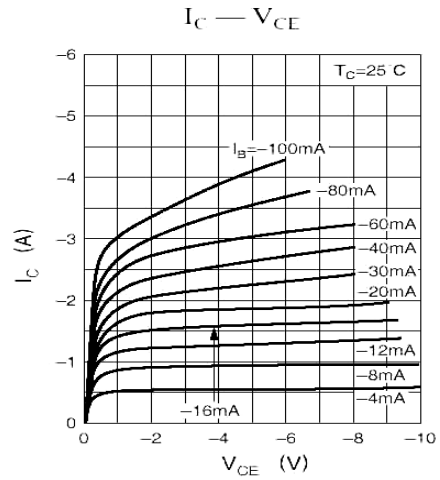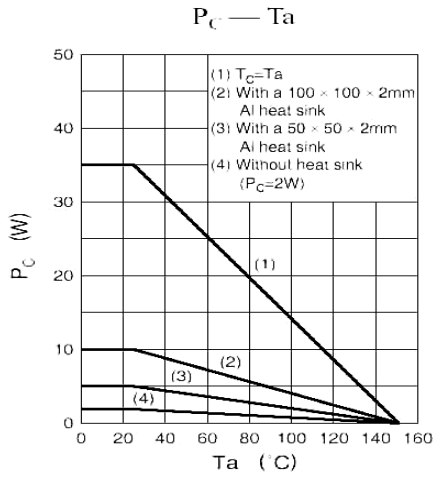


外形尺寸图 / Package Dimensions

T0-220F

单位: mm

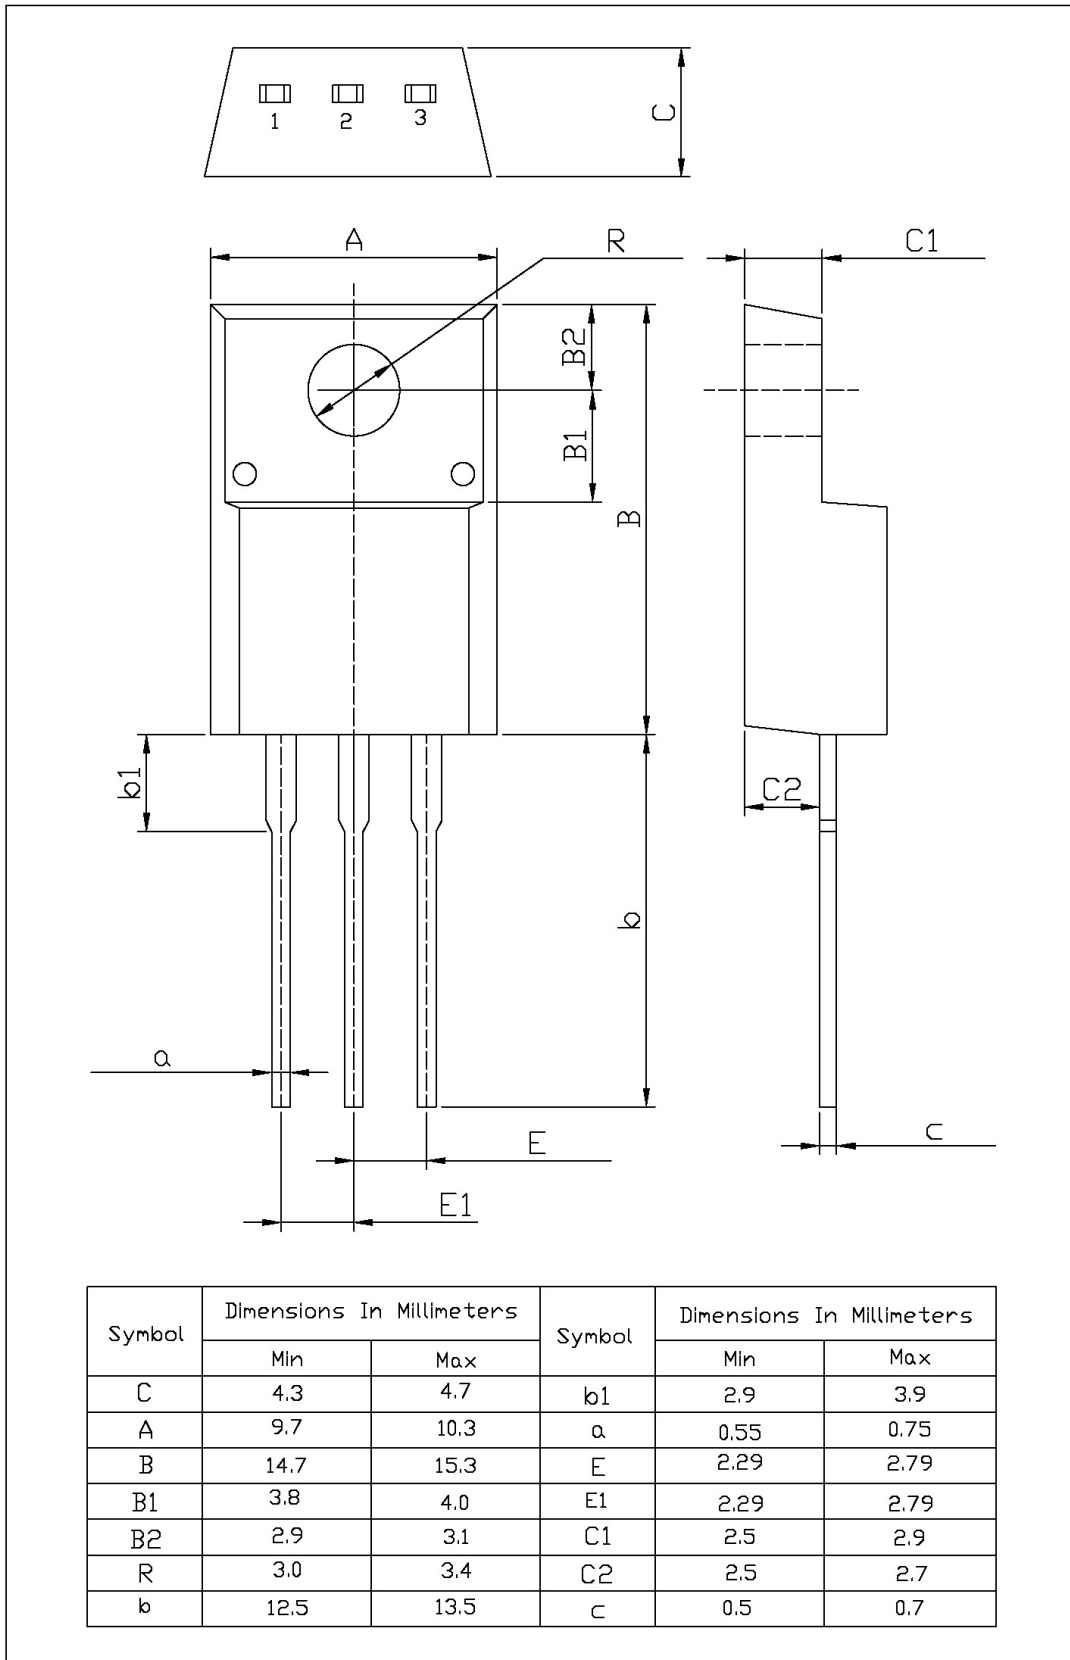

印章说明 / Marking Instructions

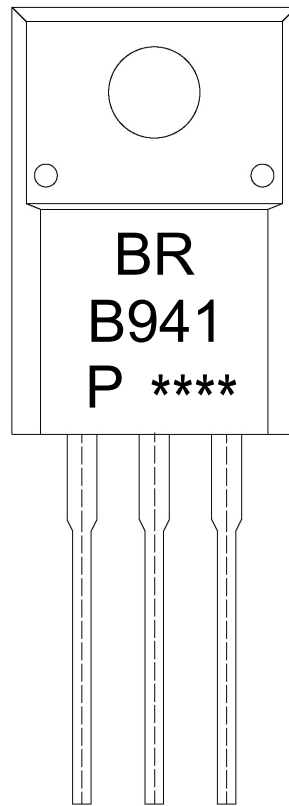

说明：

BR： 为公司代码

B941： 为型号代码

Q： 为 h_{FE} 分档代码

****： 为生产批号代码，随生产批号变化。

Note:


BR: Company Code.

B941: Product Type.

Q: h_{FE} Classifications Symbol

****: Lot No. Code, code change with Lot No.

波峰焊温度曲线图(无铅) / Temperature Profile for Dip Soldering(Pb-Free)

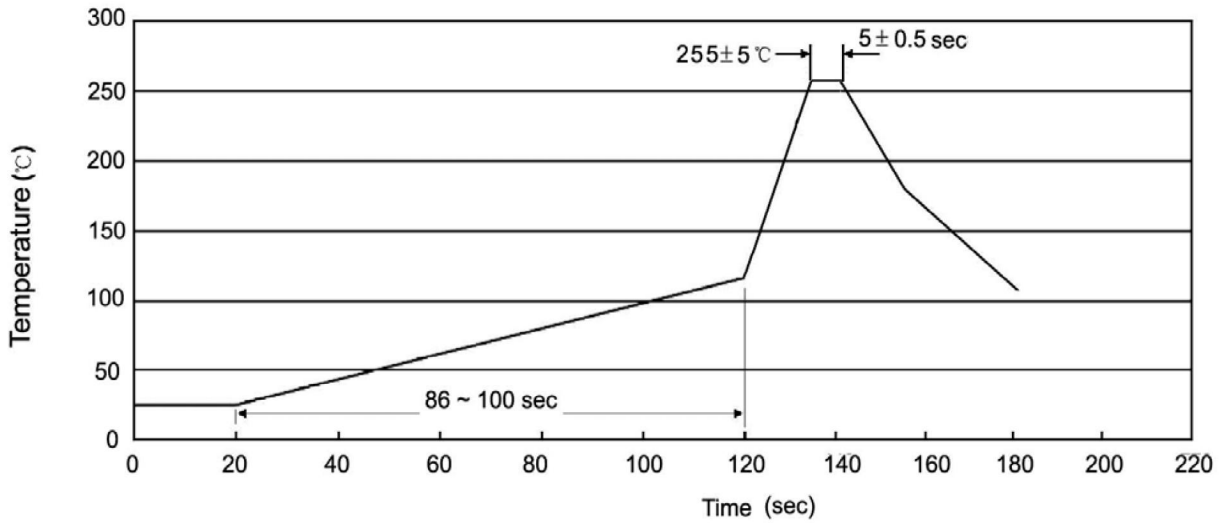

说明：

- 1、预热温度 25 ~ 150°C，时间 60 ~ 90sec;
- 2、峰值温度 255±5°C，时间持续为 5±0.5sec;
- 3、焊接制程冷却速度为 2 ~ 10°C/sec.

Note:

- 1.Preheating:25~150°C, Time:60~90sec.
- 2.Peak Temp.:255±5°C, Duration:5±0.5sec.
3. Cooling Speed: 2~10°C/sec.

耐焊接热试验条件 / Resistance to Soldering Heat Test Conditions

温度：270±5°C

时间：10±1 sec.

Temp.:270±5°C

Time:10±1 sec

包装规格 / Packaging SPEC.

散件包装 / BULK

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: mm ³) | | |
|----------------------|------------------|-----------------------|------------------------|------------------------------|------------------------|---|-------------|-------------|
| | Units/Bag 只/袋 | Bags/Inner Box 袋/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Bag 袋 | Inner Box 盒 | Outer Box 箱 |
| TO-220/F | 200 | 10 | 2,000 | 5 | 10,000 | 135×190 | 237×172×102 | 560×245×195 |

套管包装 / TUBE

| Package Type 封装形式 | Units 包装数量 | | | | | Dimension 包装尺寸 (unit: mm ³) | | |
|----------------------|--------------------|-------------------------|------------------------|------------------------------|------------------------|---|-------------|-------------|
| | Units/Tube 只/套管 | Tubes/Inner Box 套管/盒 | Units/Inner Box 只/盒 | Inner Boxes/Outer Box 盒/箱 | Units/Outer Box 只/箱 | Tube 套管 | Inner Box 盒 | Outer Box 箱 |
| TO-220/F | 50 | 20 | 1,000 | 5 | 5,000 | 532×31.4×5.5 | 555×164×50 | 575×290×180 |

使用说明 / Notices