


FEATURES

- Integrated Design Optimizes Performance at High Bit Rates up to 10 Gb/s applications.
- -25 dBm Typical Sensitivity
- -7 dBm Overload Power (typ.)
- 27 dB Optical Return Loss (ORL)
- Integral Thermistor
- Simplifies Receiver Circuit Design
- Integrated HBT IC preamp

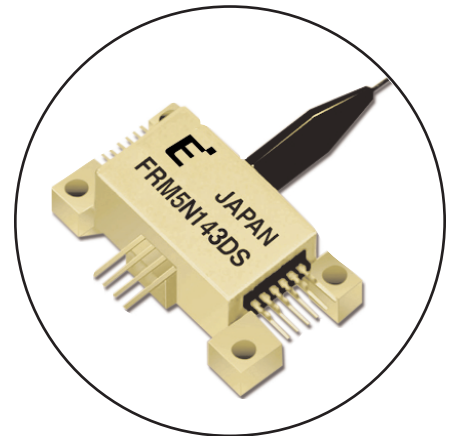

APPLICATIONS

This 80GHz gain bandwidth product APD detector with HBT preamp is intended to function as an optical receiver for DWDM, SONET, SDH optical fiber systems operating at 10Gb/s. This detector operates at both 1310 and 1550nm. The nominal 10k Ω integral thermistor allows accurate monitoring of the APD temperature and facilitates the design of the APD bias control circuit. It has a typical transimpedance (Z_t) value of 1100 Ω . The detector preamplifier is DC coupled and has a differential electrical output.

DESCRIPTION

The FRM5N143DS incorporates a high bandwidth InGaAs APD photo diode, a GaAs HBT IC amplifier in a hermetically sealed butterfly type package. The APD is processed with modern MOVPE techniques resulting in reliable performance over a wide range of operating conditions. The lens coupling system and the single mode fiber are assembled using Nd YAG welding. It has differential output with DC coupling.

ABSOLUTE MAXIMUM RATINGS ($T_C=25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit
Storage Temperature	T_{stg}	-40 to +85	$^\circ\text{C}$
Operating Temperature	T_{op}	0 to +70	$^\circ\text{C}$
Supply Voltage	V_{SS}	-6 to 0	V
APD Reverse Voltage	V_R	0 to V_B (Note 1)	V
APD Reverse Current	I_R	1.0	mA

OPTICAL & ELECTRICAL CHARACTERISTICS ($T_C=25^\circ\text{C}$, $\lambda=1,550\text{nm}$, $V_{SS}=-5.2\text{V}$, unless otherwise specified)

Parameter	Symbol	Test Conditions	Limits			Unit
			Min.	Typ.	Max.	
APD Responsivity	R15	1,550nm, M=1	0.65	0.7	-	A/W
APD Breakdown Voltage	V_B	$I_D=10\mu\text{A}$	20	30	35	V
Temperature Coefficient of V_B	Γ	(Note 2)	0.03	0.05	0.07	$\text{V}/^\circ\text{C}$
AC Transimpedance	Z_t	$R_L=50\Omega$, $f=130\text{MHz}$,	800	1100	1400	Ω
Bandwidth	BW	$R_L=50\Omega$, M=9, -3dB from 130MHz, $P_{in} = -20\text{dBm}$	7.5	8.0	-	GHz
Sensitivity	P_r	NRZ, 10Gb/s, PRBS= $2^{23}-1$, B.E.R.= 10^{-10} , V_R is set at optimum value	-	-25	-24	dBm
Maximum Overload	P_o	NRZ, 10Gb/s, PRBS= $2^{23}-1$, B.E.R.= 10^{-10} , M = 3	-8	-7	-	dBm
Optical Return Loss	ORL	-	27	-	-	dB
Power Supply Current	I_{SS}	-	-	110	130	mA
Power Supply Voltage	V_{SS}	-	-5.46	-5.2	-4.94	V
Thermistor Resistance	R_{tr}	$V_{SS}=0\text{V}$	9.5	10	10.5	$\text{k}\Omega$
Thermistor B Constant	B	$V_{SS}=0\text{V}$	3,800	3,900	4,000	K

Note: (1) V_B differs from device to device. V_B data is attached to each devices.
(2) $\Gamma=dV_B/dT_C$

Fig. 1 Multiplication vs. Photocurrent

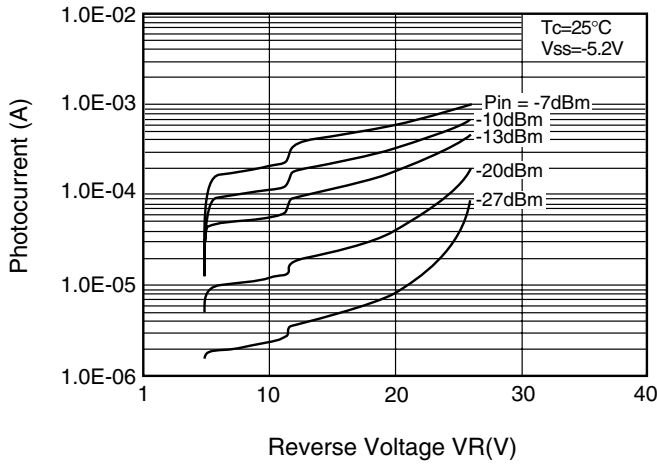


Fig. 2 Multiplication Characteristics

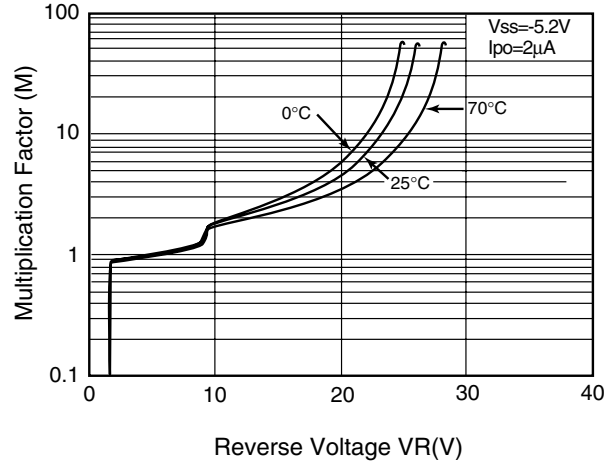


Fig. 3 Relative Frequency Response

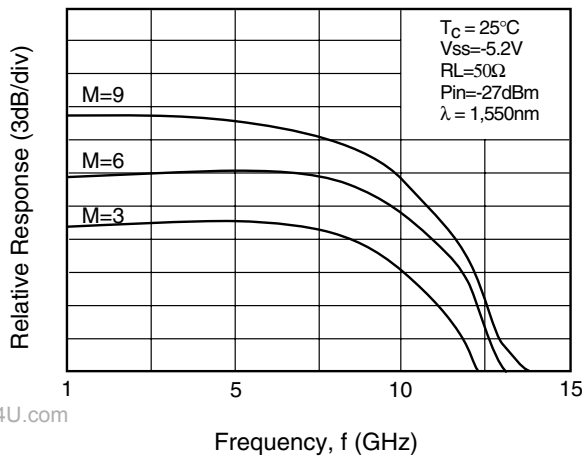


Fig. 4 Multiplication vs. Bandwidth

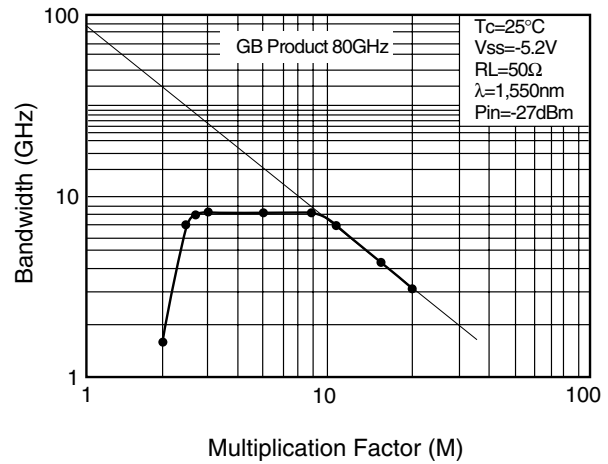


Fig. 5 Bit Error Rate

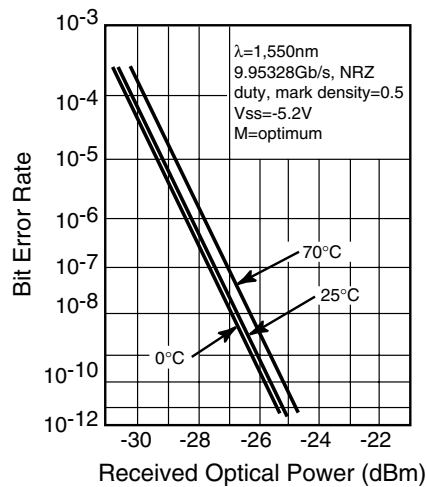


Fig. 6 Sensitivity vs. Multiplication Factor



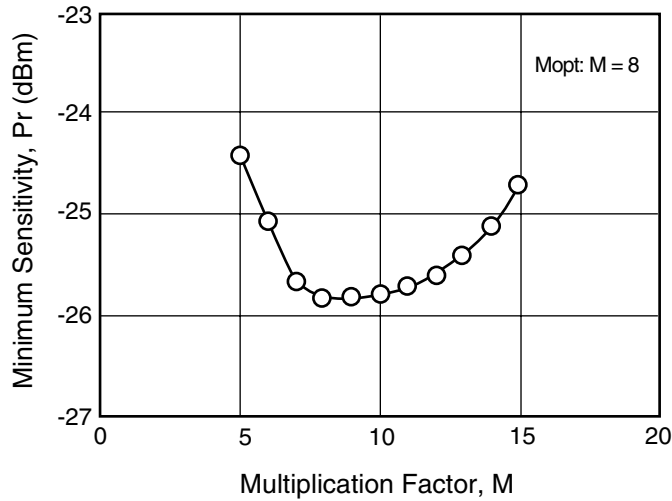


Fig. 7 Input Wave Form 1,550nm, 9.9532Gb/s NRZ, 2²³-1 PRBS, duty and mark density=0.5

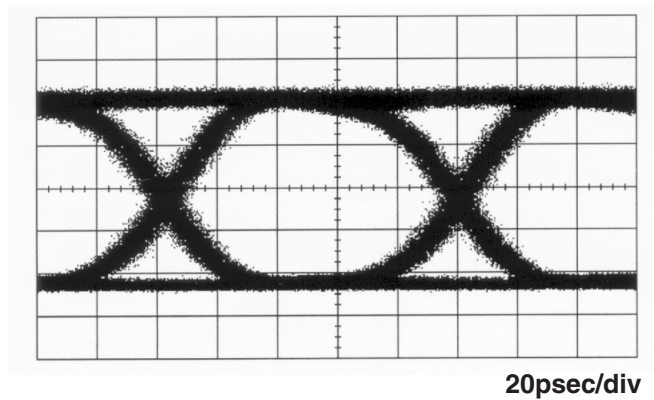


www.DataSheet4U.com


Fig. 8 Output Wave Form Tc=25°C, RL=50Ω Pin=-26dBm, Vss=-5.2V, M=9

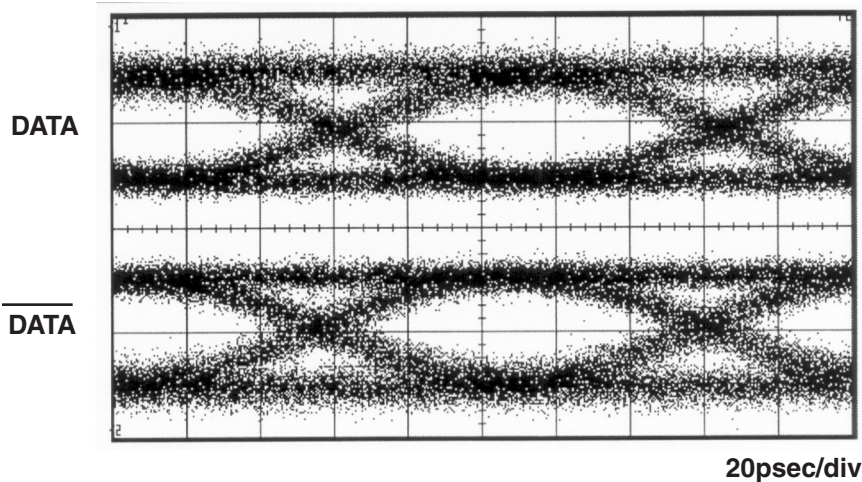

**Fig. 9 Output Wave Form Tc=25°C, RL=50Ω, Pin=-20dBm
Vss=-5.2V, M=3**

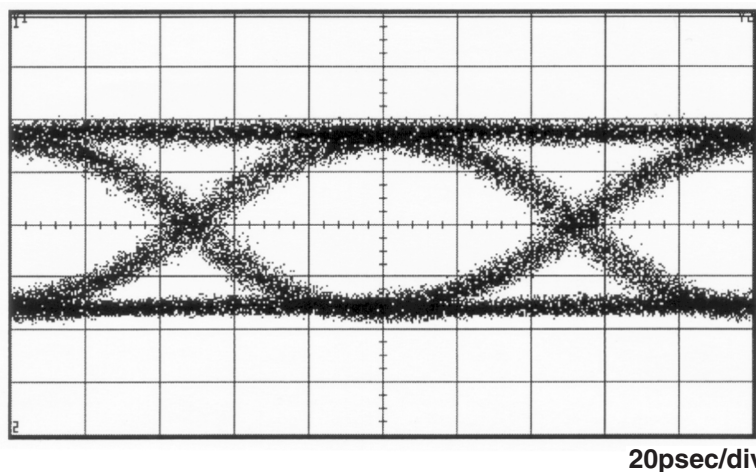


**Fig. 10 Output Wave Form Tc=25°C, RL=50Ω,
Pin=-7dBm, Vss=-5.2V, M=3**

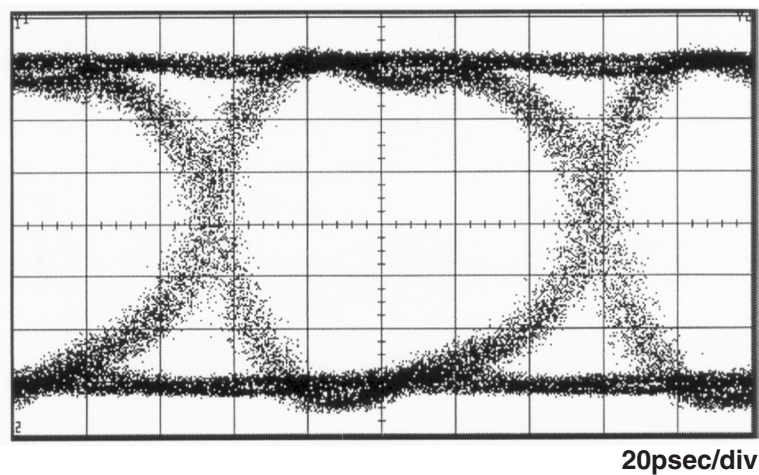


www.DataSheet4U.com

FRM5N143DS Recommended Circuit

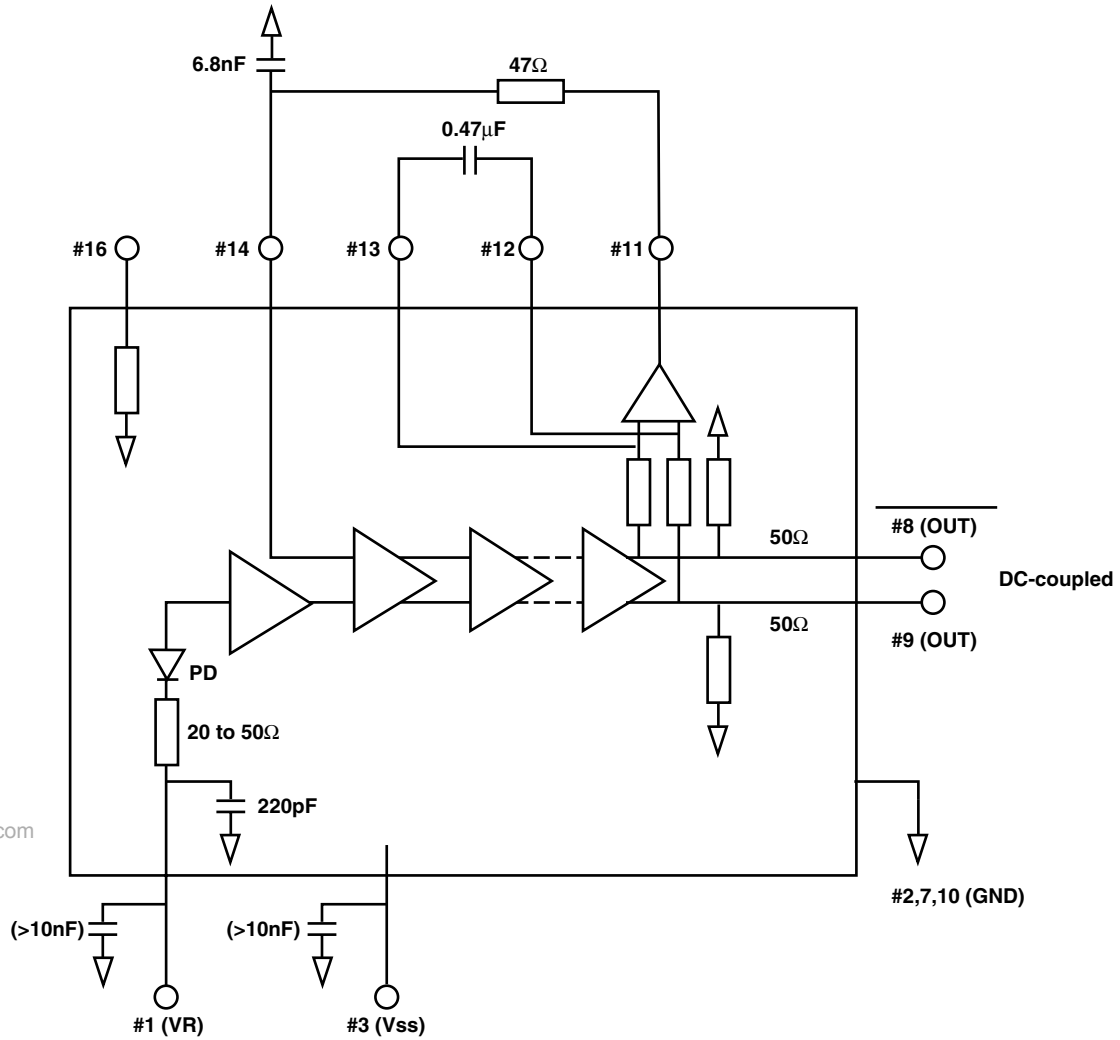

www.DataSheet4U.com

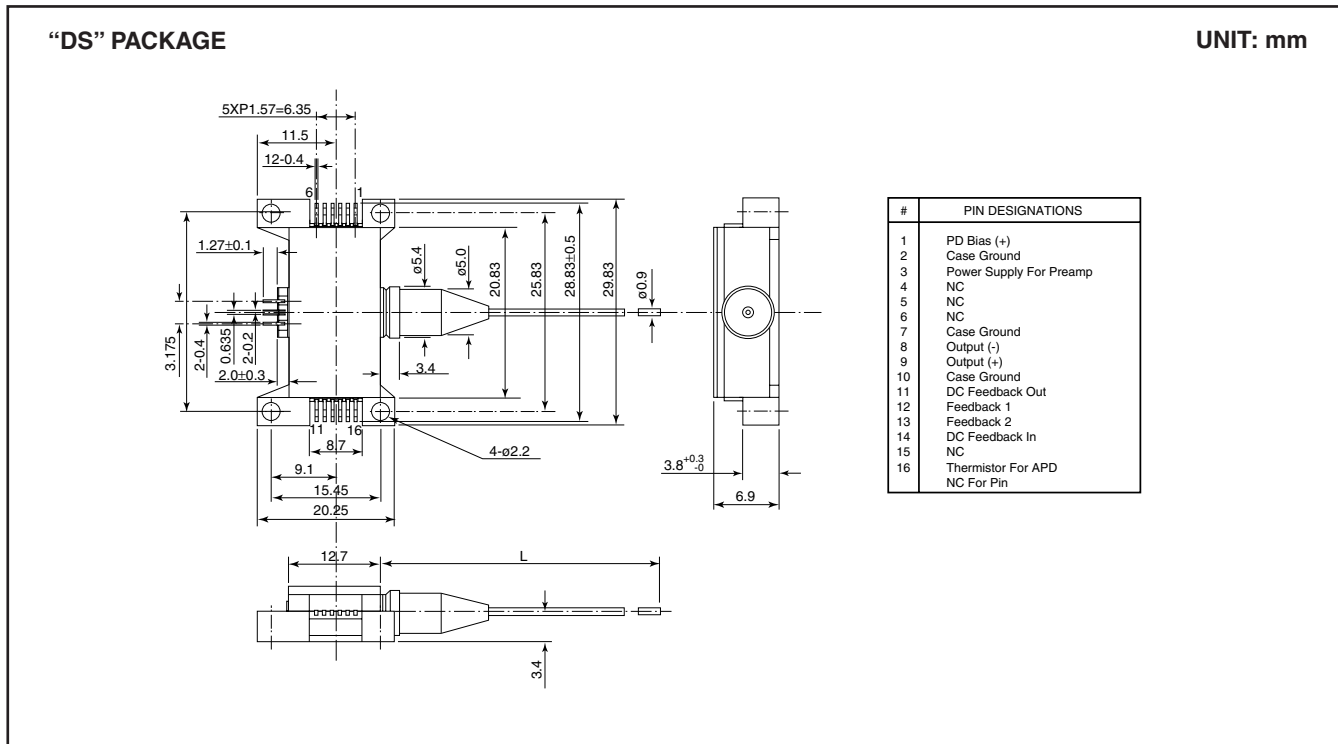

For further information please contact:

Eudyna Devices USA Inc.

2355 Zanker Rd.
San Jose, CA 95131-1138, U.S.A.
TEL: (408) 232-9500
FAX: (408) 428-9111
www.us.eudyna.com

Eudyna Devices Europe Ltd.

Network House
Norreys Drive
Maidenhead, Berkshire SL6 4FJ
United Kingdom
TEL: +44 (0) 1628 504800
FAX: +44 (0) 1628 504888

Eudyna Devices Asia Pte Ltd.

Hong Kong Branch
Rm. 1101, Ocean Centre, 5 Canton Rd.
Tsim Sha Tsui, Kowloon, Hong Kong
TEL: +852-2377-0227
FAX: +852-2377-3921

Eudyna Devices Inc.

Sales Division
1, Kanai-cho, Sakae-ku
Yokohama, 244-0845, Japan
TEL: +81-45-853-8156
FAX: +81-45-853-8170

CAUTION

Eudyna Devices Inc. products contain **gallium arsenide (GaAs)** which can be hazardous to the human body and the environment. For safety, observe the following procedures:

- Do not put this product into the mouth.
- Do not alter the form of this product into a gas, powder, or liquid through burning, crushing, or chemical processing as these by-products are dangerous to the human body if inhaled, ingested, or swallowed.
- Observe government laws and company regulations when discarding this product. This product must be discarded in accordance with methods specified by applicable hazardous waste procedures.

Eudyna Devices Inc. reserves the right to change products and specifications without notice. The information does not convey any license under rights of Eudyna Devices Inc. or others.

© 2004 Eudyna Devices USA Inc.
Printed in U.S.A.