

2012 Size


1.71-1.91GHz Band
Chip Multilayer RF Transformer

Impedance Ratio 50:200

FSLT-S180G



Shape & Size

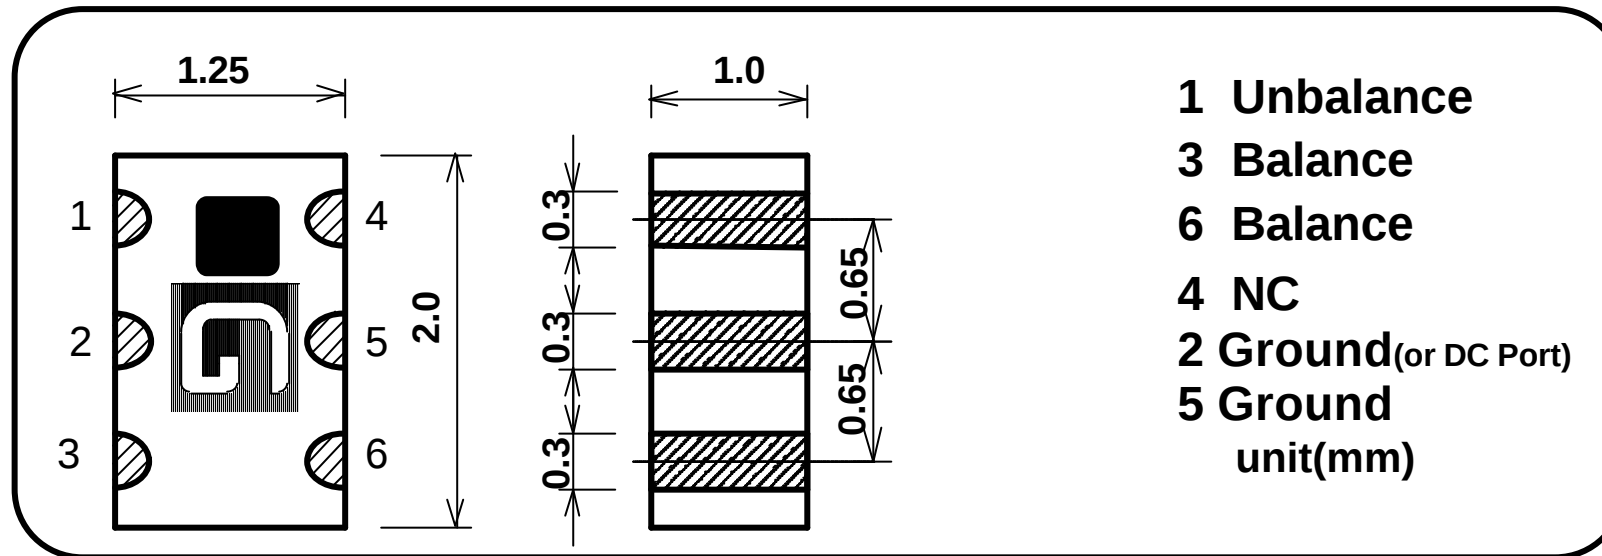

Specifications





P/N	Frequency Range(GHz)	Impedance ratio	Insertion Loss *1	Amplitude Balance	Phase Balance	Handling Power	Temperature Range
FSLT-S180G	1.71-1.91	50:200	1.0dB Max.	1.0dB Max.	180 +/- 10deg.	1W Max.	-35 to +85 deg.C

*1 Measured by "Back to Back" per piece


FSLT-S180G Sample DATA

www.DataSheet4U.com

1 U FS 1 : 45.111ohm 3.0371ohm 282.67 pF
1710 MHz
2 : 35.363ohm
-7.8574ohm
1910 MHz

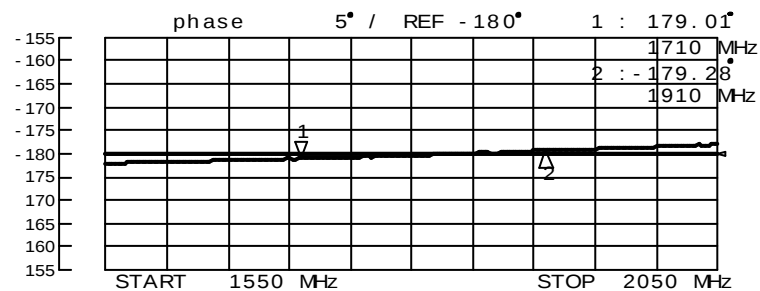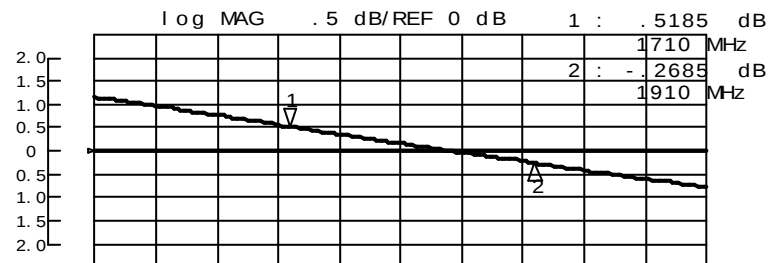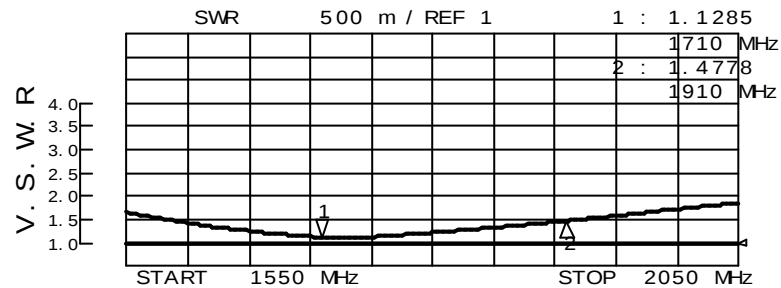


Phase Balance Amp. Balance

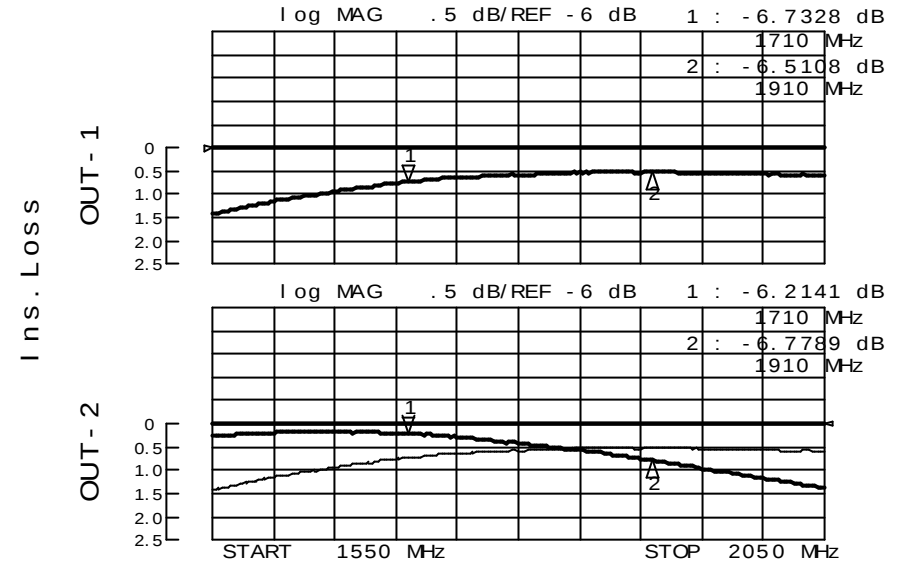

Ins. Loss

Insertion Loss(Out 1, Out 2):
measurement-splitting loss-resistor loss

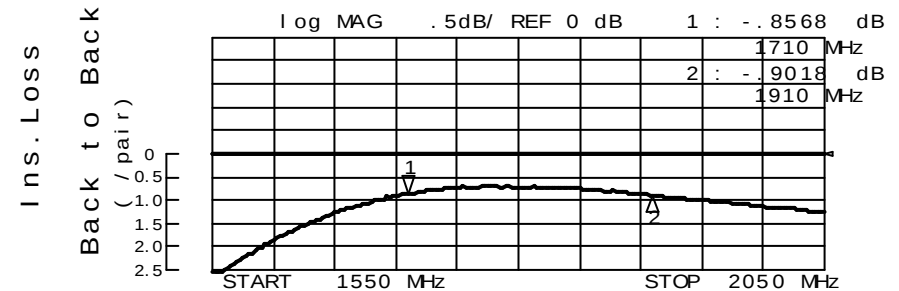


Ins. Loss

All the technical data and information contained herein are subject to change without notice.


www.DataSheet4U.com

LT-FSLT-S180G-0410A

If you apply DC voltage to Balance Port,
please add capacitor as below circuit A.

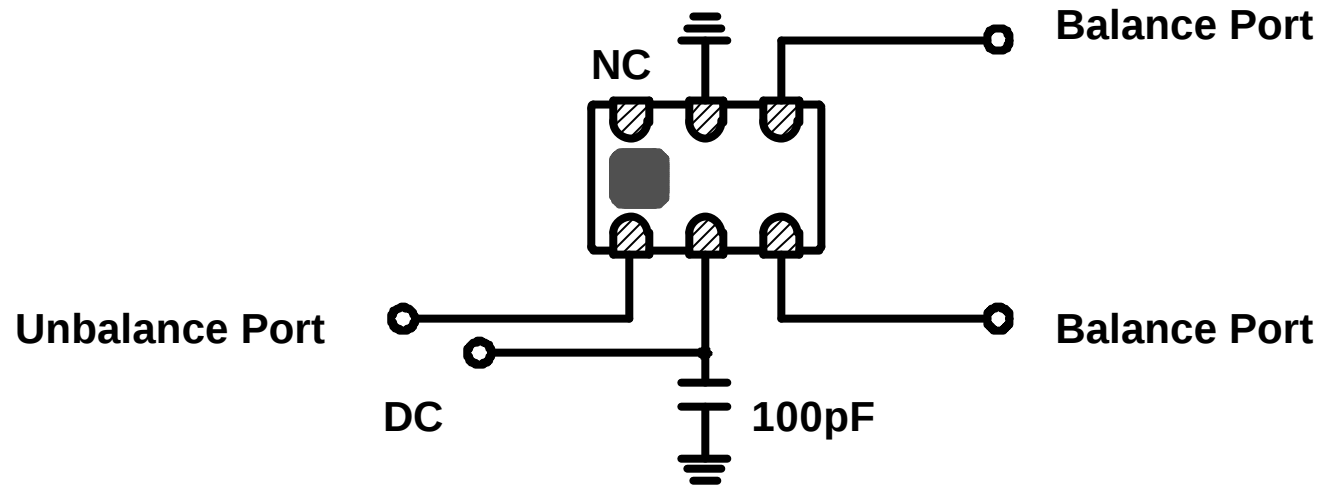

Foot Pattern

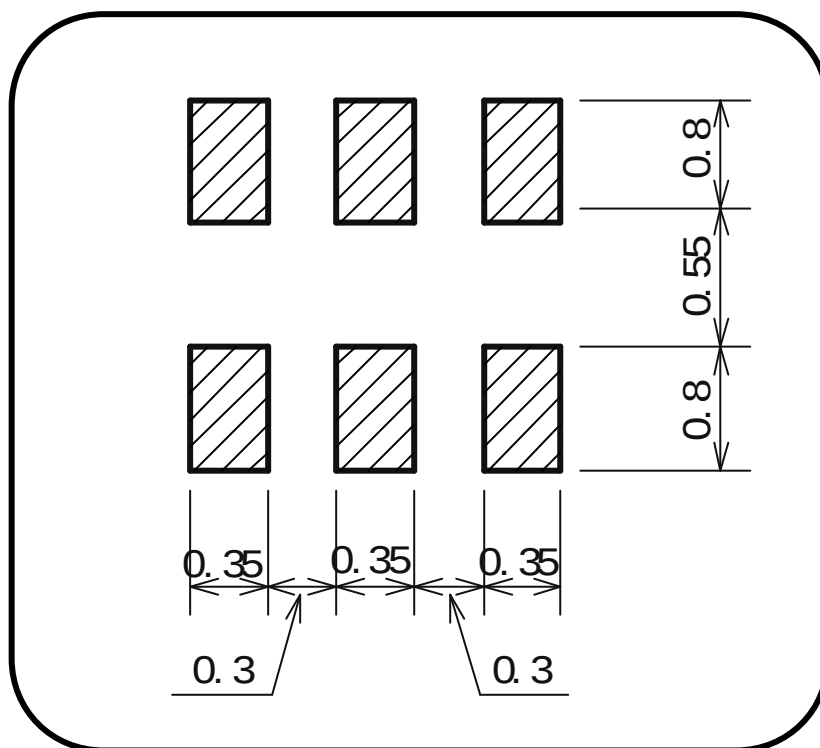

Foot Pattern Example

