

Silicon PNP Power Transistors

2SB945

DESCRIPTION


- With TO-220Fa package
- Large collector current I_C
- Low collector saturation voltage
- Complement to type 2SD1270

APPLICATIONS

- For power switching applications

PINNING

PIN	DESCRIPTION
1	Base
2	Collector
3	Emitter

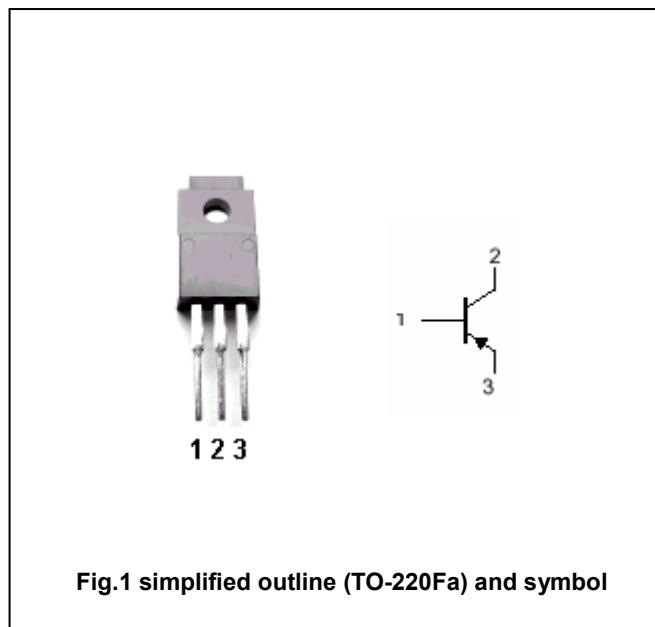Absolute maximum ratings($T_a=25^\circ\text{C}$)

SYMBOL	PARAMETER	CONDITIONS	VALUE	UNIT
V_{CBO}	Collector-base voltage	Open emitter	-130	V
V_{CEO}	Collector-emitter voltage	Open base	-80	V
V_{EBO}	Emitter-base voltage	Open collector	-7	V
I_C	Collector current		-5	A
I_{CM}	Collector current-peak		-10	A
P_C	Collector power dissipation	$T_a=25^\circ\text{C}$	2	W
		$T_C=25^\circ\text{C}$	40	
T_j	Junction temperature		150	$^\circ\text{C}$
T_{stg}	Storage temperature		-55~150	$^\circ\text{C}$

Silicon PNP Power Transistors

2SB945

CHARACTERISTICS

Tj=25°C unless otherwise specified

SYMBOL	PARAMETER	CONDITIONS	MIN	TYP.	MAX	UNIT
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C=-10mA, I_B=0$	-80			V
V_{CEsat}	Collector-emitter saturation voltage	$I_C=-4A, I_B=-0.2A$			-0.5	V
V_{BEsat}	Base-emitter saturation voltage	$I_C=-4A, I_B=-0.2A$			-1.5	V
I_{EBO}	Emitter cut-off current	$V_{EB}=-5V; I_C=0$			-50	μA
I_{CBO}	Collector cut-off current	$V_{CB}=-100V; I_E=0$			-10	μA
h_{FE-1}	DC current gain	$I_C=-0.1A; V_{CE}=-2V$	45			
h_{FE-2}	DC current gain	$I_C=-2A; V_{CE}=-2V$	90		260	
f_T	Transition frequency	$I_C=-0.5A; V_{CE}=-10V, f=10MHz$		30		MHz

Switching times

t_{on}	Turn-on time	$I_C=-2A; I_{B1}=-0.2A, I_{B2}=0.2A$		0.13		μs
t_{stg}	Storage time			0.5		μs
t_f	Fall time			0.13		μs

◆ h_{FE-2} Classifications

Q	P
90-180	130-260

Silicon PNP Power Transistors

2SB945

PACKAGE OUTLINE

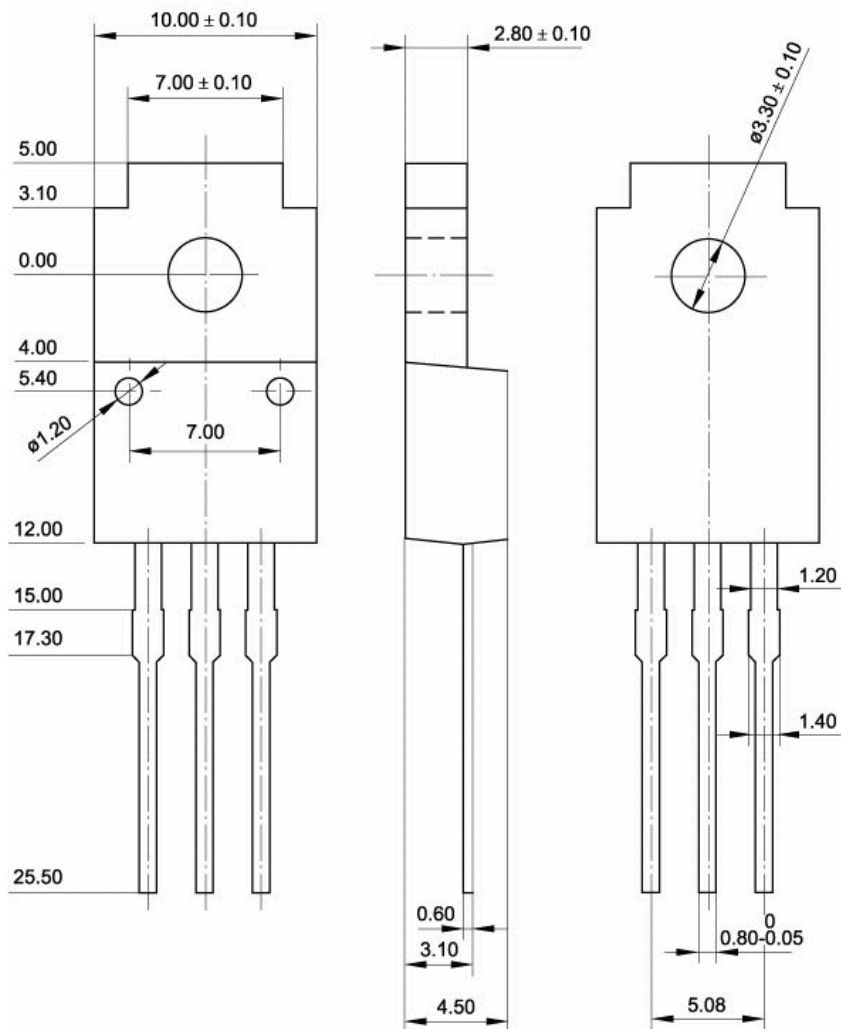


Fig.2 Outline dimensions (unindicated tolerance:±0.15 mm)

Silicon PNP Power Transistors

2SB945

