

# **FT25LX04/02**

# **DATASHEET**

# CONTENTS

|                                                              |           |
|--------------------------------------------------------------|-----------|
| <b>1. FEATURES .....</b>                                     | <b>3</b>  |
| <b>2. GENERAL DESCRIPTION .....</b>                          | <b>4</b>  |
| CONNECTION DIAGRAM .....                                     | 4         |
| PIN DESCRIPTION .....                                        | 4         |
| BLOCK DIAGRAM .....                                          | 5         |
| <b>3. MEMORY ORGANIZATION .....</b>                          | <b>6</b>  |
| FT25LX04 64K BYTES BLOCK SECTOR ARCHITECTURE .....           | 6         |
| FT25LX02 64K BYTES BLOCK SECTOR ARCHITECTURE .....           | 7         |
| <b>4. DEVICE OPERATION .....</b>                             | <b>8</b>  |
| <b>5. DATA PROTECTION .....</b>                              | <b>8</b>  |
| TABLE 1.1 FT25LX04 PROTECTED AREA SIZES .....                | 8         |
| TABLE 1.2 FT25LX02 PROTECTED AREA SIZES .....                | 9         |
| <b>6. STATUS REGISTER .....</b>                              | <b>10</b> |
| <b>7. COMMANDS DESCRIPTION .....</b>                         | <b>11</b> |
| 7.1. WRITE ENABLE (WREN) (06H) .....                         | 13        |
| 7.2. WRITE DISABLE (WRDI) (04H) .....                        | 13        |
| 7.3. READ STATUS REGISTER (RDSR) (05H) .....                 | 13        |
| 7.4. WRITE STATUS REGISTER (WRSR) (01H) .....                | 14        |
| 7.5. READ DATA BYTES (READ) (03H) .....                      | 14        |
| 7.6. READ DATA BYTES AT HIGHER SPEED (FAST READ) (0BH) ..... | 15        |
| 7.9. BLOCK ERASE (BE) (D8H) .....                            | 17        |
| 7.10. CHIP ERASE (CE) (60/C7H) .....                         | 17        |
| 7.11. READ MANUFACTURE ID/ DEVICE ID (REMS) (90H) .....      | 18        |
| 7.12. READ IDENTIFICATION (RDID) (9FH) .....                 | 19        |
| <b>8. ELECTRICAL CHARACTERISTICS .....</b>                   | <b>22</b> |
| 8.1. POWER-ON TIMING .....                                   | 22        |
| 8.2. INITIAL DELIVERY STATE .....                            | 22        |
| 8.3. DATA RETENTION AND ENDURANCE .....                      | 22        |
| 8.4. LATCH UP CHARACTERISTICS .....                          | 22        |
| 8.5. ABSOLUTE MAXIMUM RATINGS .....                          | 23        |
| 8.6. CAPACITANCE MEASUREMENT CONDITION .....                 | 23        |
| 8.7. DC CHARACTERISTICS .....                                | 24        |
| 8.8. AC CHARACTERISTICS .....                                | 25        |
| <b>9. ORDERING INFORMATION .....</b>                         | <b>27</b> |
| <b>10. PACKAGE INFORMATION .....</b>                         | <b>28</b> |
| 10.1. PACKAGE SOP8 150MIL .....                              | 28        |
| 10.2. PACKAGE SOP8 208MIL .....                              | 29        |
| 10.3. PACKAGE DIP8 300MIL .....                              | 30        |
| 10.4. PACKAGE VSOP8 208MIL .....                             | 31        |
| 10.5. PACKAGE TSSOP8 173MIL .....                            | 32        |
| 10.6. PACKAGE UDFN8 .....                                    | 31        |
| 10.7. PACKAGE DFN8 (4x3MM) .....                             | 31        |
| 10.8. PACKAGE DFN8 (4x4MM) .....                             | 32        |
| <b>11. REVISION HISTORY .....</b>                            | <b>33</b> |


## 1. FEATURES

- 4M-bit/2M-bit Serial Flash
  - 512K-byte/256K-byte
  - 256 bytes per programmable page
- Standard SPI
  - Standard SPI: SCLK, CS#, SI, SO,
- High Speed Clock Frequency
  - 50MHz for fast read with 30PF load
- Program/Erase Speed
  - Page Program time: 1.8ms typical
  - Sector Erase time: 180ms typical
  - Block Erase time: 1.0 s typical
  - Chip Erase time: 7.2s typical
- Flexible Architecture
  - Sector of 4K-byte
  - Block of 64k-byte
- Low Power Consumption
  - 10mA maximum active current
  - 5uA maximum standby current
- Single Power Supply Voltage: Full voltage range:1.65~1.95V
- Minimum 100,000 Program/Erase Cycle
- Hardware Features
  - 8-pin SOP8 (150mil)
  - 8-pin SOP8 (208mil)
  - 8-pin DIP8 (300mil)
  - 8-pin VSOP8 (208mil)
  - 8-pin TSSOP8(173mil)
  - 8-pad UDFN8

## 2. GENERAL DESCRIPTION

The FT25LX04/02 (4M-bit/2M-bit) Serial flash supports the standard Serial Peripheral Interface (SPI). SPI clock frequency of up to 50MHz is supported for fast read command.

### CONNECTION DIAGRAM

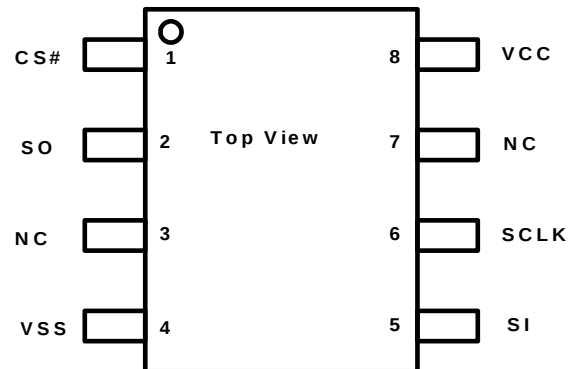


8-PIN SOP8/VSOP8/UDFN8

### PIN DESCRIPTION

| Pin Name | I/O | Description        |
|----------|-----|--------------------|
| CS#      | I   | Chip Select Input  |
| SO       | O   | Data Output        |
| VSS      |     | Ground             |
| SI       | I   | Data Input         |
| SCLK     | I   | Serial Clock Input |
| VCC      |     | Power Supply       |

## BLOCK DIAGRAM

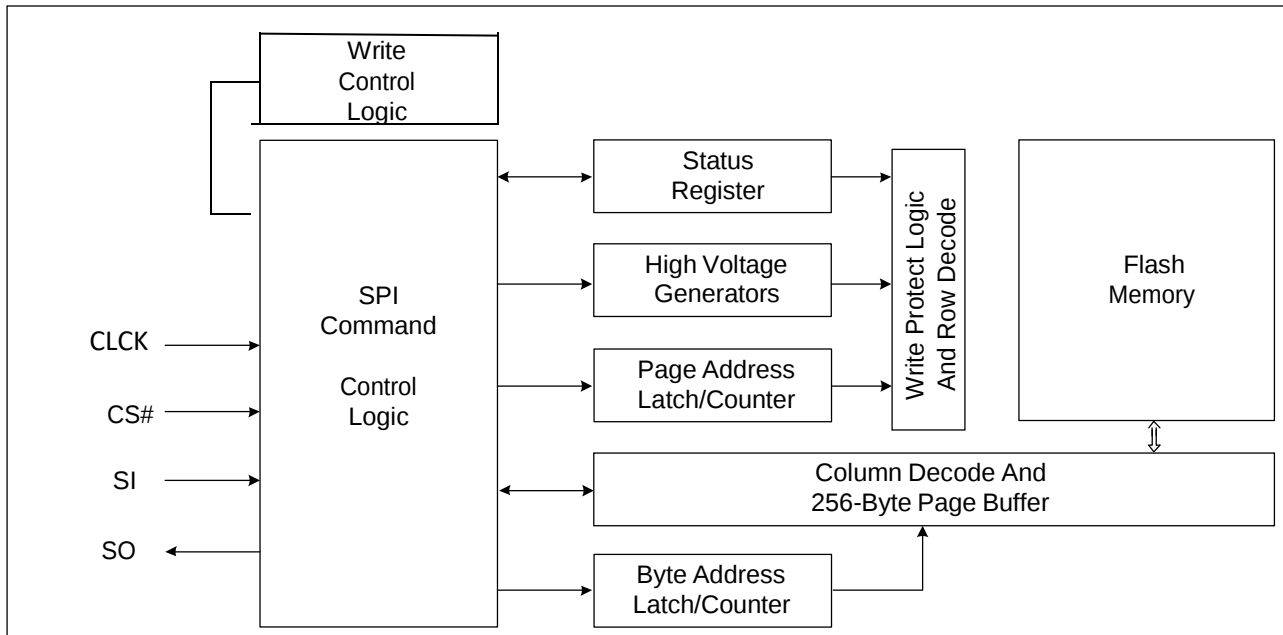

### 3. MEMORY ORGANIZATION

#### FT25LX04/02

| Each Device has | Each block has | Each sector has | Each page has |         |
|-----------------|----------------|-----------------|---------------|---------|
| 512K/256K       | 64K            | 4K              | 256           | bytes   |
| 2K/1K           | 256            | 16              | -             | pages   |
| 128/64          | 16             | -               | -             | sectors |
| 8/4             | -              | -               | -             | blocks  |

#### UNIFORM BLOCK SECTOR ARCHITECTURE

#### FT25LX04 64K Bytes Block Sector Architecture

| Block | Sector | Address range |          |
|-------|--------|---------------|----------|
| 7     | 127    | 07F000H       | 07FFFFH  |
|       | .....  | .....         | .....    |
|       | 112    | 070000H       | 070FFFFH |
| 6     | 111    | 06F000H       | 06FFFFH  |
|       | .....  | .....         | .....    |
|       | 96     | 060000H       | 060FFFFH |
| ..... | .....  | .....         | .....    |
|       | .....  | .....         | .....    |
|       | .....  | .....         | .....    |
| ..... | .....  | .....         | .....    |
|       | .....  | .....         | .....    |
|       | .....  | .....         | .....    |
| 2     | 47     | 02F000H       | 02FFFFH  |
|       | .....  | .....         | .....    |
|       | 32     | 020000H       | 020FFFFH |
| 1     | 31     | 01F000H       | 01FFFFH  |
|       | .....  | .....         | .....    |
|       | 16     | 010000H       | 010FFFFH |
| 0     | 15     | 00F000H       | 00FFFFH  |
|       | .....  | .....         | .....    |
|       | 0      | 000000H       | 000FFFFH |

## FT25LX02 64K Bytes Block Sector Architecture

| Block | Sector | Address range |          |
|-------|--------|---------------|----------|
| 3     | 63     | 03F000H       | 03FFFFH  |
|       | .....  | .....         | .....    |
|       | 48     | 030000H       | 030FFFFH |
| 2     | 47     | 02F000H       | 02FFFFH  |
|       | .....  | .....         | .....    |
|       | 32     | 020000H       | 020FFFFH |
| 1     | 31     | 01F000H       | 01FFFFH  |
|       | .....  | .....         | .....    |
|       | 16     | 010000H       | 010FFFFH |
| 0     | 15     | 00F000H       | 00FFFFH  |
|       | .....  | .....         | .....    |
|       | 0      | 000000H       | 000FFFFH |

## 4. DEVICE OPERATION

The FT25LX04/02 features a serial peripheral interface on 4 signals bus: Serial Clock (SCLK), Chip Select (CS#), Serial Data Input (SI) and Serial Data Output (SO). Both SPI bus mode 0 and 3 are supported. Input data is latched on the rising edge of SCLK and data shifts out on the falling edge of SCLK.

## 5. DATA PROTECTION

The FT25LX04/02 provides the following data protection methods:

- Write Enable (WREN) command: The WREN command is set the Write Enable Latch bit (WEL). The WEL bit will return to reset by the following situation:
  - Power-Up
  - Write Disable (WRDI)
  - Write Status Register (WRSR)
  - Page Program (PP)
  - Sector Erase (SE) / Block Erase (BE) / Chip Erase (CE)
- Software Protection Mode:
  - SRWD=0, the Block Protect (BP2, BP1, BP0) bits define the section of the memory array that can be read but not change
  - SRWD=1, the Write Status Register (WRSR) instruction is no longer accepted for execution and the SRWD bit and Block Protect bits (BP2, BP1, BP0) are read only.

**Table1.1 FT25LX04 Protected Area Sizes**

| Status bit |     |     | Protect level | Protect Block |
|------------|-----|-----|---------------|---------------|
| BP2        | BP1 | BP0 |               |               |
| 0          | 0   | 0   | 0(none)       | None          |
| 0          | 0   | 1   | 1 (1 block)   | Block 7       |
| 0          | 1   | 0   | 2 (2 blocks)  | Block 6-7     |
| 0          | 1   | 1   | 3 (4 blocks)  | Block 4-7     |
| 1          | 0   | 0   | 4 (8 blocks)  | All           |
| 1          | 0   | 1   | 5 (All)       | All           |
| 1          | 1   | 0   | 6 (All)       | All           |
| 1          | 1   | 1   | 7 (All)       | All           |

Table1.2 FT25LX02 Protected Area Sizes

| Status bit |     |     | Protect level | Protect Block |
|------------|-----|-----|---------------|---------------|
| BP2        | BP1 | BP0 |               |               |
| 0          | 0   | 0   | 0(none)       | None          |
| 0          | 0   | 1   | 1 (1 block)   | Block 3       |
| 0          | 1   | 0   | 2 (2 blocks)  | Block 2-3     |
| 0          | 1   | 1   | 3 (4 blocks)  | ALL           |

## 6. STATUS REGISTER

| S7   | S6       | S5       | S4  | S3  | S2  | S1  | S0  |
|------|----------|----------|-----|-----|-----|-----|-----|
| SRWD | Reserved | Reserved | BP2 | BP1 | BP0 | WEL | WIP |

The status and control bits of the Status Register are as follows:

### WIP bit.

The Write In Progress (WIP) bit indicates whether the memory is busy in program/erase/write status register progress. When WIP bit sets to 1, the device is busy in program/erase/write status register progress. When WIP bit sets 0, the device is not in program, erase or write status register .

### WEL bit.

The Write Enable Latch (WEL) bit indicates the status of the internal Write Enable Latch. When set to 1, the internal Write Enable Latch is set. When set to 0, the internal Write Enable Latch is reset and no Write Status Register, Program or Erase command is accepted.

### BP2, BP1, BP0 bits.

The Block Protect (BP2, BP1, BP0) bits are non-volatile. They define the size of the area to be software protected against Program and Erase commands. These bits are written with the Write Status Register (WRSR) command. When the Block Protect (BP2, BP1, BP0) bits are set to 1, the relevant memory area (as defined in Table1.1 or 1.2).becomes protected against Page Program (PP), Sector Erase (SE) and Block Erase (BE) commands. Chip Erase command will be ignored if one or more of the Block Protect (BP2, BP1, BP0) bits are 1.

### SRWD bit.

The Status Register Write Disable (SRWD) bit is a non-volatile One Time Program(OTP) bit in the status register that provide another software protection. Once it is set to 1, the Write Status Register (WRSR) instruction is no longer accepted and the SRWD bit and Block Protect bits (BP2, BP1, BP0) are read only.

| SRWD | Status register                                                                                     | Memory                                        |
|------|-----------------------------------------------------------------------------------------------------|-----------------------------------------------|
| 0    | Status register can be written in (WEL bit is set to "1") and the SRWD, BP2-BP0 bits can be changed | The protected area cannot be program or erase |
| 1    | The SRWD, BP2-BP0 of status register bits cannot be changed                                         | The protected area cannot be program or erase |

## 7. COMMANDS DESCRIPTION

All commands, addresses and data are shifted in and out of the device, beginning with the most significant bit on the first rising edge of SCLK after CS# is driven low. Then, the one-byte command code must be shifted in to the device, most significant bit first on SI, each bit being latched on the rising edges of SCLK.

See Table2, every command sequence starts with a one-byte command code. Depending on the command, this might be followed by address bytes, or by data bytes, or by both or none. CS# must be driven high after the last bit of the command sequence has been shifted in. For the command of Read, Fast Read, Read Status Register, and Read Device ID, the shifted-in command sequence is followed by a data-out sequence. CS# can be driven high after any bit of the data-out sequence is being shifted out.

For the command of Page Program, Sector Erase, Block Erase, Chip Erase, Write Status Register, Write Enable, Write Disable, CS# must be driven high exactly at a byte boundary, otherwise the command is rejected. That is CS# must driven high when the number of clock pulses after CS# being driven low is an exact multiple of eight. For Page Program, if at any time the input byte is not a full byte, nothing will happen and WEL will not be reset.

**Table2. Commands**

| Command Name           | Byte1  | Byte2       | Byte3              | Byte4             | Byte5       | Byte6       | n-Bytes      |
|------------------------|--------|-------------|--------------------|-------------------|-------------|-------------|--------------|
| Write Enable           | 06H    |             |                    |                   |             |             |              |
| Write Disable          | 04H    |             |                    |                   |             |             |              |
| Read Status Register   | 05H    | (S7-S0)     |                    |                   |             |             | (continuous) |
| Write Status Register  | 01H    | (S7-S0)     |                    |                   |             |             | (continuous) |
| Read Data              | 03H    | A23-A16     | A15-A8             | A7-A0             | (D7-D0)     | (Next byte) | (continuous) |
| Fast Read              | 0BH    | A23-A16     | A15-A8             | A7-A0             | dummy       | (D7-D0)     | (continuous) |
| Page Program           | 02H    | A23-A16     | A15-A8             | A7-A0             | (D7-D0)     | (Next byte) |              |
| Sector Erase           | 20H    | A23-A16     | A15-A8             | A7-A0             |             |             |              |
| Block Erase            | D8H    | A23-A16     | A15-A8             | A7-A0             |             |             |              |
| Chip Erase             | C7/60H |             |                    |                   |             |             |              |
| Manufacturer/Device ID | 90H    | dummy       | dummy              | 00H               | (MID7-MID0) | (DID7-DID0) | (continuous) |
| Read Identification    | 9FH    | (MID7-MID0) | (JDID15-JDI<br>D8) | (JDID7-JDID<br>0) |             |             | (continuous) |

**Table of ID Definitions:****FT25LX04**

| Operation Code | M7-M0 | ID15-ID8 | ID7-ID0 |
|----------------|-------|----------|---------|
| 9FH            | C2    | 25       | 33      |
| 90H            | C2    |          | 33      |


**FT25LX02**

| Operation Code | M7-M0 | ID15-ID8 | ID7-ID0 |
|----------------|-------|----------|---------|
| 9FH            | C2    | 25       | 32      |
| 90H            | C2    |          | 32      |

## 7.1. Write Enable (WREN) (06H)

The Write Enable (WREN) command is for setting the Write Enable Latch (WEL) bit. The Write Enable Latch (WEL) bit must be set prior to every Page Program (PP), Sector Erase (SE), Block Erase (BE), Chip Erase (CE) and Write Status Register (WRSR) command. The Write Enable (WREN) command sequence: CS# goes low→Send Write Enable command→CS# goes high.


**Figure1. Write Enable Sequence Diagram**

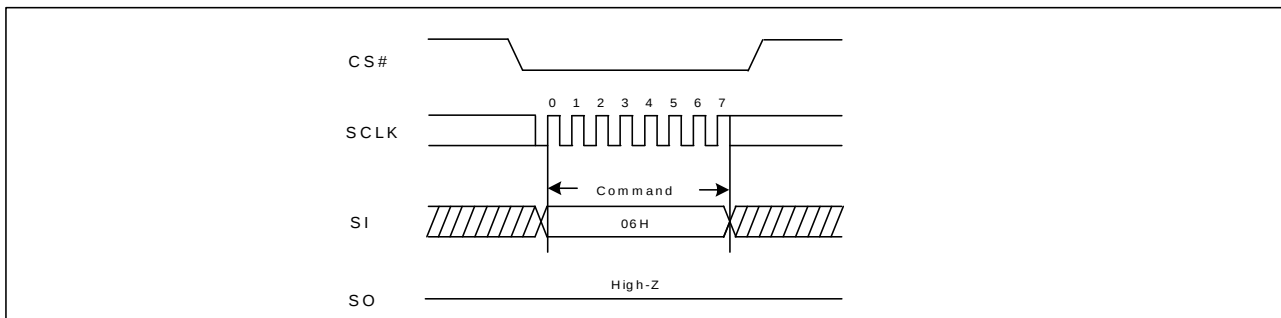

## 7.2. Write Disable (WRDI) (04H)

The Write Disable command is for resetting the Write Enable Latch (WEL) bit. The Write Disable command sequence: CS# goes low→Send Write Disable command→CS# goes high. The WEL bit is reset by following condition: Power-up and upon completion of the Write Status Register, Page Program, Sector Erase, Block Erase and Chip Erase commands.


**Figure2. Write Disable Sequence Diagram**

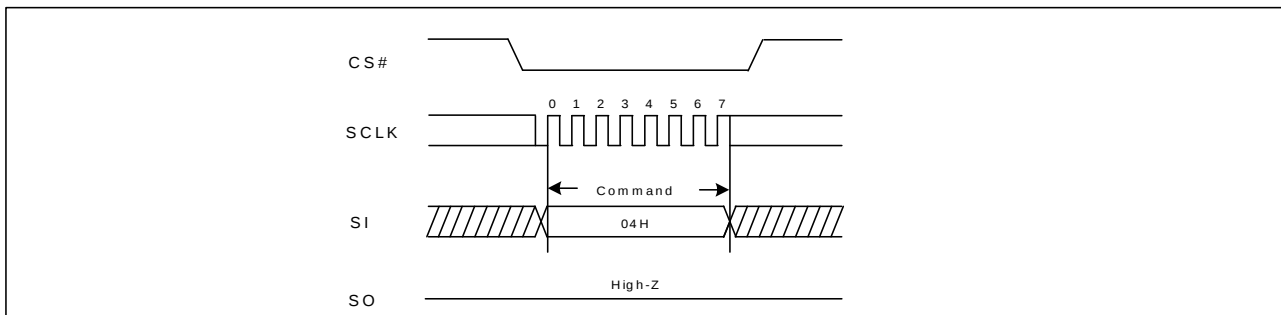

## 7.3. Read Status Register (RDSR) (05H)

The Read Status Register (RDSR) command is for reading the Status Register. The Status Register may be read at any time, even while a Program, Erase or Write Status Register cycle is in progress. When one of these cycles is in progress, it is recommended to check the Write In Progress (WIP) bit before sending a new command to the device. It is also possible to read the Status Register continuously.

Figure3. Read Status Register Sequence Diagram

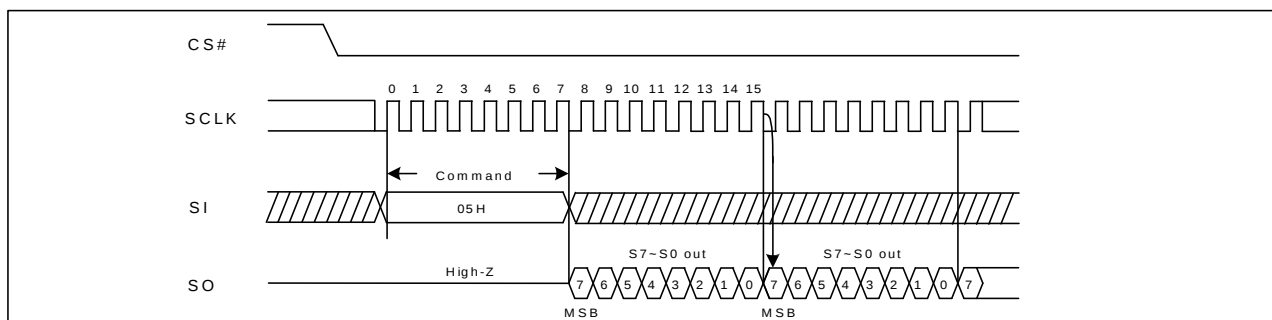


## 7.4. Write Status Register (WRSR) (01H)

The Write Status Register (WRSR) command allows new values to be written to the Status Register. Before it can be accepted, a Write Enable (WREN) command must previously have been executed. After the Write Enable (WREN) command has been decoded and executed, the device sets the Write Enable Latch (WEL).

The Write Status Register (WRSR) command has no effect on S6, S5, S1 and S0 of the Status Register. CS# must be driven high after the eighth bit of the data byte has been latched in. If not, the Write Status Register (WRSR) command is not executed. As soon as CS# is driven high, the self-timed Write Status Register cycle (whose duration is  $t_w$ ) is initiated. While the Write Status Register cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Write Status Register cycle, and is 0 when it is completed. When the cycle is completed, the Write Enable Latch (WEL) is reset.

The Write Status Register (WRSR) command allows the user to change the values of the Block Protect (BP2, BP1, BP0) bits, to define the size of the area that is to be treated as read-only, as defined in Table 1.1 and 1.2. The Status Register Write Disable (SRWD) bit is a non-volatile One Time Program (OTP) bit, the Write Status Register (WRSR) command allows the user to set the Status Register Write Disable (SRWD) bit to 1. The Status Register Write Disable (SRWD) bit allows the device to be put in another Software Protected Mode. Once the SRWD bit is set to 1, the Write Status Register (WRSR) command is not executed, and the SRWD bit and Block Protect bits (BP2, BP1, BP0) are read only.

Figure4. Write Status Register Sequence Diagram

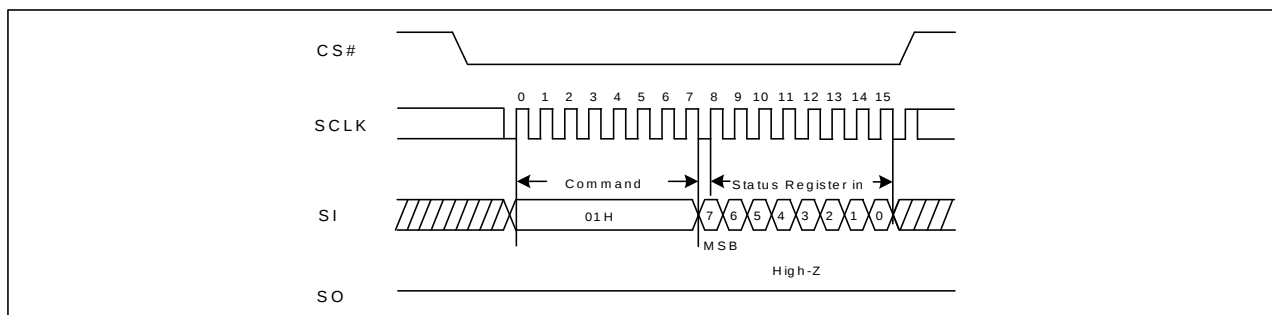


## 7.5. Read Data Bytes (READ) (03H)

The Read Data Bytes (READ) command is followed by a 3-byte address (A23-A0), each bit being

latched-in during the rising edge of SCLK. Then the memory content, at that address, is shifted out on SO, each bit being shifted out, at a Max frequency  $f_R$ , during the falling edge of SCLK. The first byte addressed can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out. Therefore, the whole memory can be read with a single Read Data Bytes (READ) command. During an Erase, Program or Write cycle, Read Data Byte (READ) command will be rejected without affecting the cycle in progress.


**Figure5. Read Data Bytes Sequence Diagram**

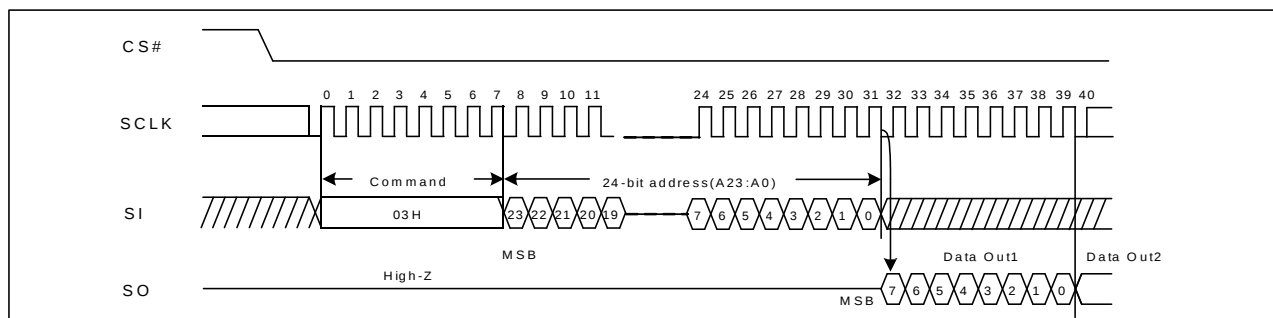

## 7.6. Read Data Bytes At Higher Speed (Fast Read) (0BH)

The Read Data Bytes at Higher Speed (Fast Read) command is for quickly reading data out. It is followed by a 3-byte address (A23-A0) and a dummy byte, each bit being latched-in during the rising edge of SCLK. Then the memory content, at that address, is shifted out on SO, each bit being shifted out, at a Max frequency  $f_C$ , during the falling edge of SCLK. The first byte address can be at any location. The address is automatically incremented to the next higher address after each byte of data is shifted out.

**Figure6. Read Data Bytes at Higher Speed Sequence Diagram**

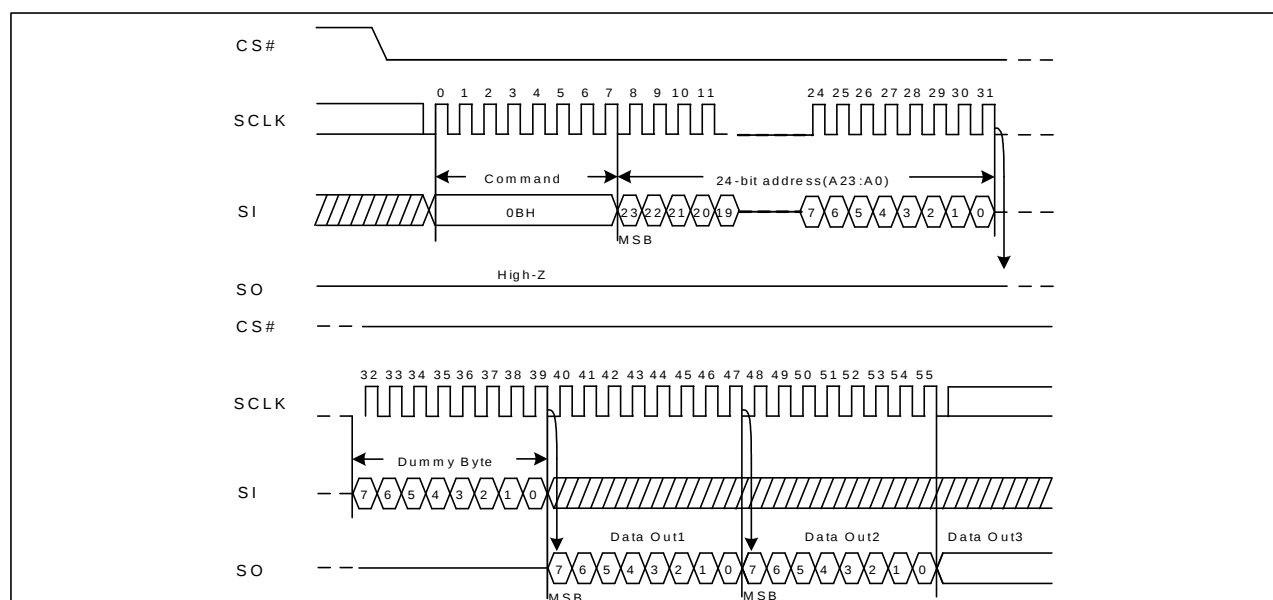

## 7.7. Page Program (PP) (02H)


The Page Program (PP) command is for programming the memory. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit before sending the Page Program command.

The Page Program (PP) command is entered by driving CS# Low, followed by the command code, three address bytes and at least one data byte on SI. If the 8 least significant address bits (A7-A0) are not all zero, all transmitted data that goes beyond the end of the current page are programmed from the start address of the same page (from the address whose 8 least significant bits (A7-A0) are all zero). CS# must be driven low for the entire duration of the sequence. The Page Program command sequence: CS# goes low→sending Page Program command→3-byte address on SI→at least 1 byte data on SI→CS# goes high. The command sequence is shown in Figure7. If more than 256 bytes are sent to the device, previously latched data are discarded and the last 256 data bytes are guaranteed to be programmed correctly within the same page. If less than 256 data bytes are sent to device, they are correctly programmed at the requested addresses without having any effects on the other bytes of the same page. CS# must be driven high after the eighth bit of the last data byte has been latched in; otherwise the Page Program (PP) command is not executed.

As soon as CS# is driven high, the self-timed Page Program cycle (whose duration is  $t_{PP}$ ) is initiated. While the Page Program cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Page Program cycle, and is 0 when it is completed. Write Enable Latch (WEL) bit is reset to 0 at the end of the Page Program Cycle..

Page Program (PP) command applied to a page which is protected by the Block Protect (BP2, BP1, BP0) bit (see Table1.1 or 1.2) is not executed.

**Figure7. Page Program Sequence Diagram**

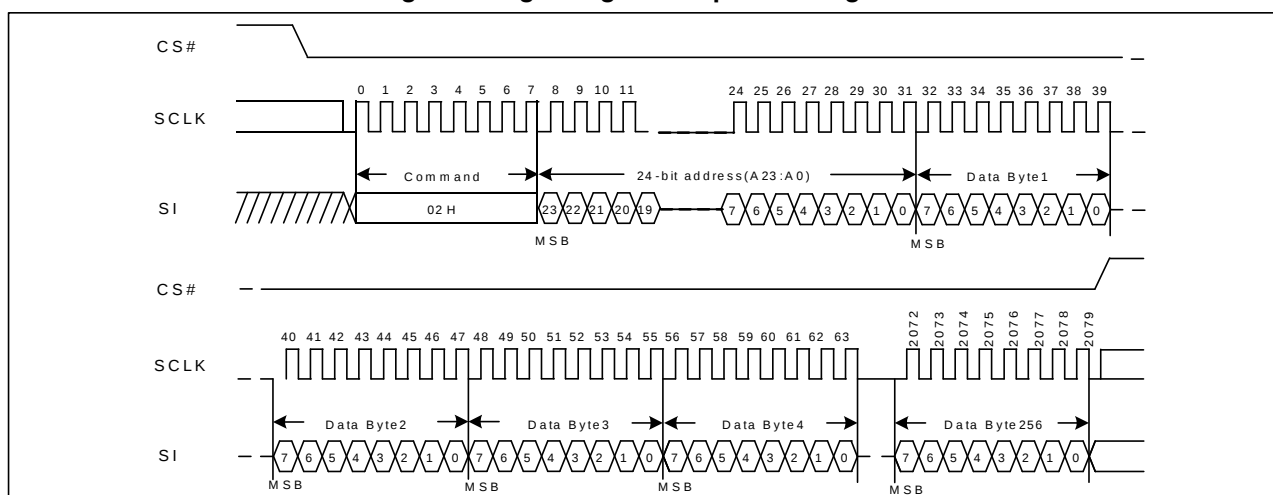


## 7.8. Sector Erase (SE) (20H)

The Sector Erase (SE) command is for erasing the all data of the chosen sector. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit. The Sector Erase (SE) command is entered by driving CS# low, followed by the command code, and 3-address byte on SI. Any address inside the sector is a valid address for the Sector Erase (SE) command. CS# must be driven low for the entire duration of the sequence.

The Sector Erase command sequence: CS# goes low→sending Sector Erase command→3-byte address on SI→CS# goes high. The command sequence is shown in Figure8. CS# must be driven high after the eighth bit of the last address byte has been latched in; otherwise the Sector Erase (SE) command is not executed. As soon as CS# is driven high, the self-timed Sector Erase cycle (whose duration is  $t_{SE}$ ) is initiated.

While the Sector Erase cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Sector Erase cycle, and is 0 when it is completed. Write Enable Latch (WEL) bit is reset to 0 at the end of the Sector Erase cycle. Sector Erase (SE) command applied to a sector which is protected by the Block Protect (BP2, BP1, BP0) bit (see Table1.1 or 1.2) is not executed.

**Figure8. Sector Erase Sequence Diagram**

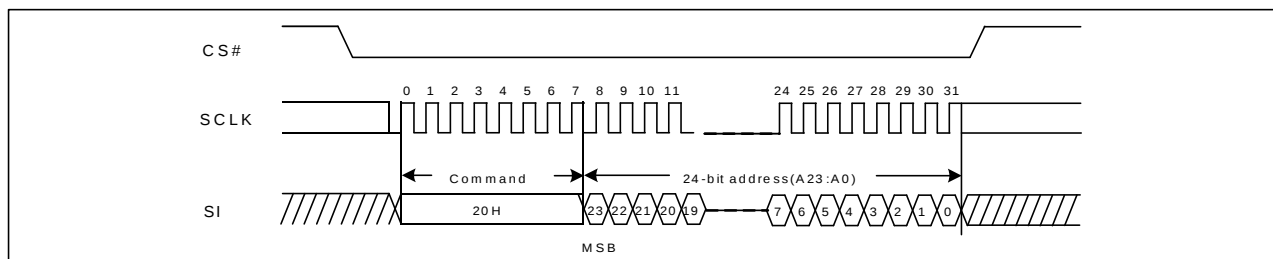


## 7.9. Block Erase (BE) (D8H)

The Block Erase (BE) command is for erasing the all data of the chosen block. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit. The Block Erase (BE) command is entered by driving CS# low, followed by the command code, and three address bytes on SI. Any address inside the block is a valid address for the Block Erase (BE) command. CS# must be driven low for the entire duration of the sequence.

The Block Erase command sequence: CS# goes low→send Block Erase command → 3-byte address on SI→CS# goes high. The command sequence is shown in Figure9. CS# must be driven high after the eighth bit of the last address byte has been latched in; otherwise the Block Erase (BE) command is not executed. As soon as CS# is driven high, the self-timed Block Erase cycle (whose duration is  $t_{BE}$ ) is initiated. While the Block Erase cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Block Erase cycle, and is 0 when it is completed. Write Enable Latch (WEL) bit is reset to 0 at the end of the Block Erase cycle. Block Erase (BE) command applied to a block which is protected by the Block Protect (BP2, BP1, BP0) bits (see Table1.1 or 1.2) is not executed.

**Figure9. Block Erase Sequence Diagram**

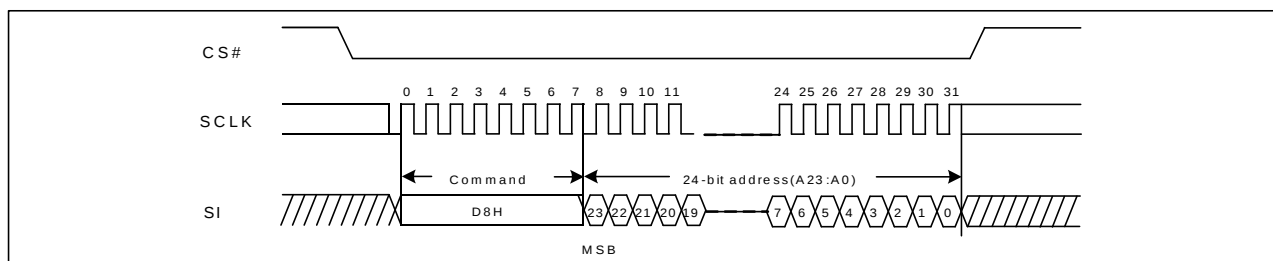


## 7.10. Chip Erase (CE) (60/C7H)

The Chip Erase (CE) command is for erasing the all data of the chip. A Write Enable (WREN) command must previously have been executed to set the Write Enable Latch (WEL) bit. The Chip Erase (CE) command

is entered by driving CS# Low, followed by the command code on Serial Data Input (SI). CS# must be driven Low for the entire duration of the sequence.

The Chip Erase command sequence: CS# goes low→send Chip Erase command→CS# goes high. The command sequence is shown in Figure10. CS# must be driven high after the eighth bit of the command code has been latched in, otherwise the Chip Erase command is not executed. As soon as CS# is driven high, the self-timed Chip Erase cycle (whose duration is  $t_{CE}$ ) is initiated. While the Chip Erase cycle is in progress, the Status Register may be read to check the value of the Write In Progress (WIP) bit. The Write In Progress (WIP) bit is 1 during the self-timed Chip Erase cycle, and is 0 when it is completed. Write Enable Latch (WEL) bit is reset to 0 at the end of the Chip Erase cycle. The Chip Erase (CE) command is ignored if one or more sectors are protected by (BP2, BP1, BP0) bits.


**Figure10. Chip Erase Sequence Diagram**

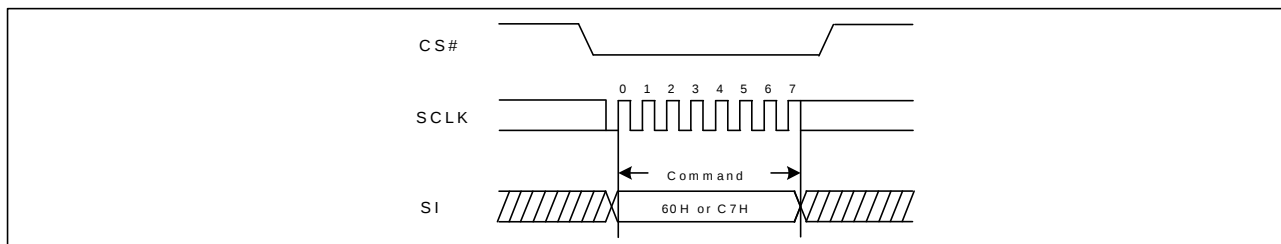

## 7.11. Read Manufacture ID/ Device ID (REMS) (90H)

The Read Manufacturer/Device ID command is for reading both the JEDEC assigned Manufacturer ID and the specific Device ID. The command is initiated by driving the CS# pin low and shifting the command code "90H" followed by a 24-bit address (A23:A0) of 000000H. After which, the Manufacturer ID and the Device ID are shifted out on the falling edge of SCLK with most significant bit (MSB) first as shown in Figure11. If the 24-bit address is initially set to 000001H, the Device ID will be read first.


**Figure11. Read Manufacture ID/ Device ID Sequence Diagram**

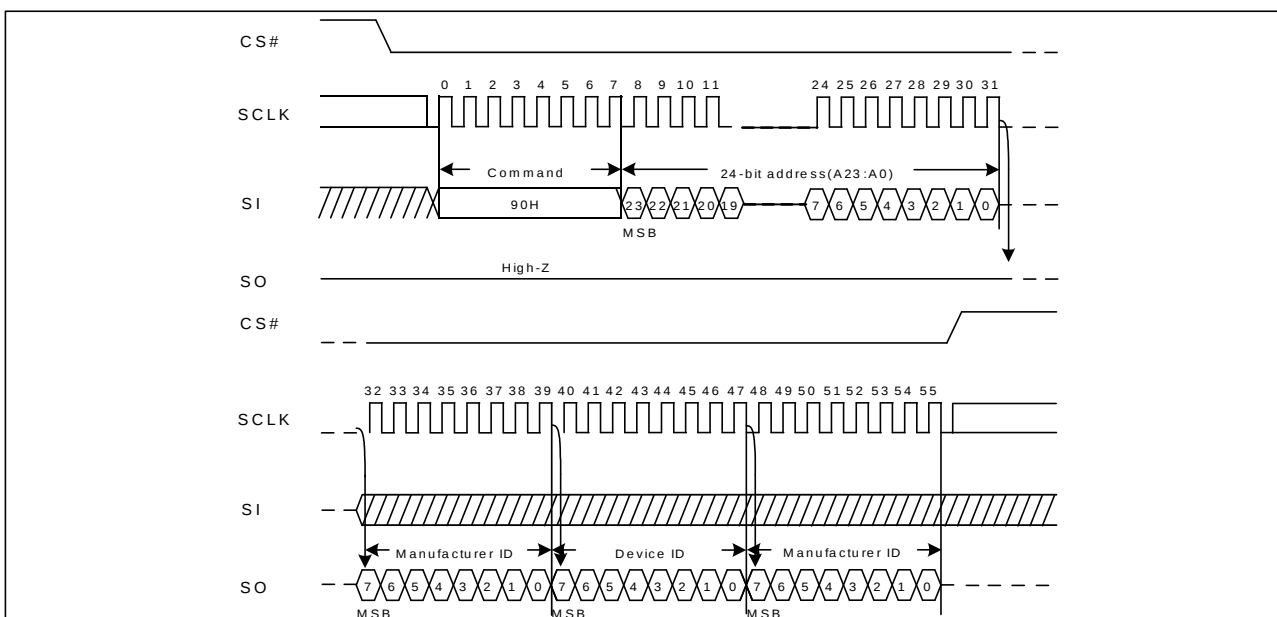

## 7.12. Read Identification (RDID) (9FH)

The Read Identification (RDID) command allows the 8-bit manufacturer identification to be read, followed by two bytes of device identification. The device identification indicates the memory type in the first byte, and the memory capacity of the device in the second byte. Any Read Identification (RDID) command while an Erase or Program cycle is in progress, is not decoded, and has no effect on the cycle that is in progress. The device is first selected by driving CS# to low. Then, the 8-bit command code for the command is shifted in. This is followed by the 24-bit device identification, stored in the memory, being shifted out on Serial Data Output, each bit being shifted out during the falling edge of Serial Clock. The command sequence is shown in Figure12. The Read Identification (RDID) command is terminated by driving CS# to high at any time during data output. After CS# is driven high, the device returns to Standby Mode and awaits for new command.

**Figure12. Read Identification ID Sequence Diagram**

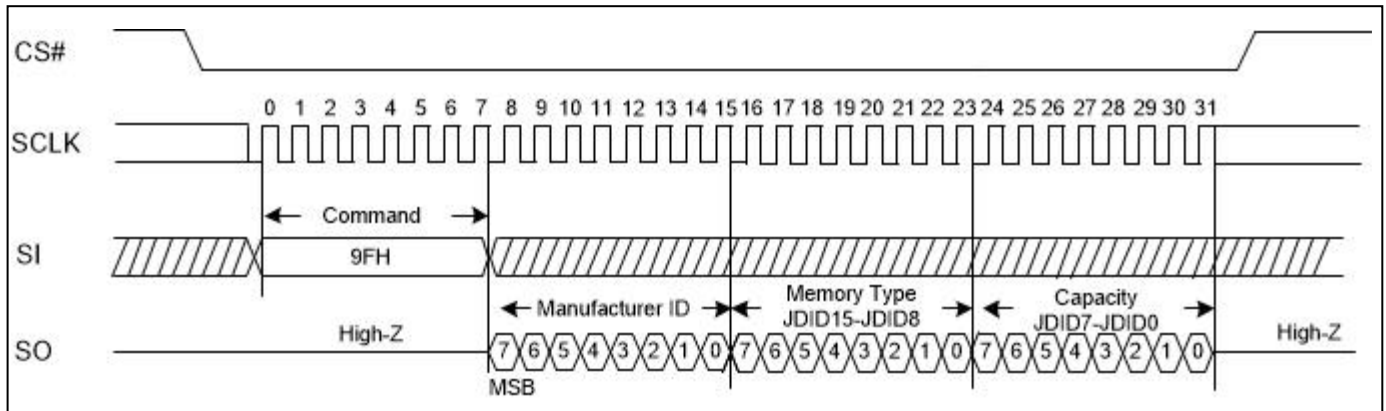

## 8. ELECTRICAL CHARACTERISTICS

### 8.1. Power-on Timing

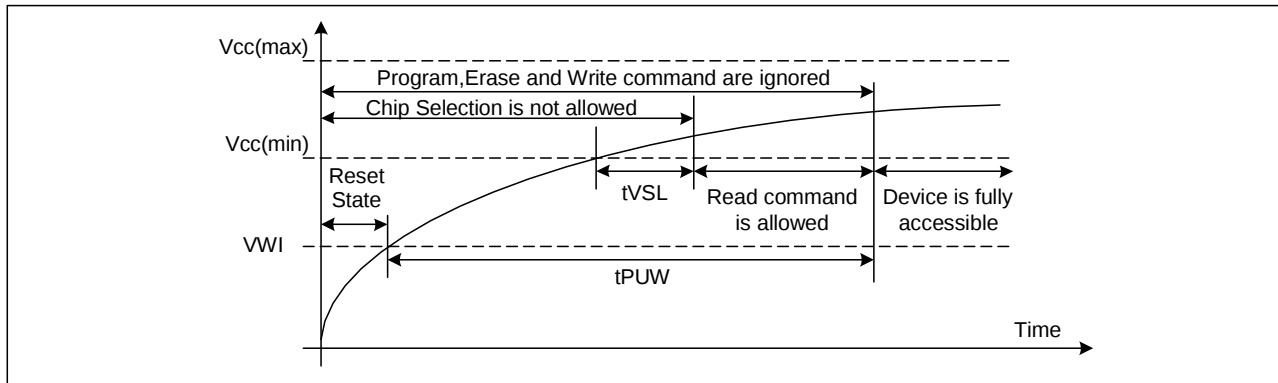


Table3. Power-Up Timing and Write Inhibit Threshold

| Symbol    | Parameter                           | Min | Max | Unit |
|-----------|-------------------------------------|-----|-----|------|
| $t_{VSL}$ | VCC(min) To CS# Low                 | 10  |     | us   |
| $t_{PUW}$ | Time Delay Before Write Instruction | 1   | 10  | ms   |
| $V_{WI}$  | Write Inhibit Voltage               | 1   | 2.5 | V    |

### 8.2. Initial Delivery State

The device is delivered with the memory array erased: all bits are set to 1(each byte contains FFH).The Status Register contains 00H (all Status Register bits are 0).

### 8.3. Data Retention and Endurance


| Parameter                           | Typical | Unit   |
|-------------------------------------|---------|--------|
| Minimum Pattern Data Retention Time | 20      | Years  |
| Erase/Program Endurance             | 100K    | Cycles |

### 8.4. Latch up Characteristics

| Parameter                                | Min    | Max      |
|------------------------------------------|--------|----------|
| Input Voltage Respect To VSS On I/O Pins | -1.0V  | VCC+1.0V |
| VCC Current                              | -100mA | 100mA    |

## 8.5. Absolute Maximum Ratings

| Parameter                     | Value       | Unit |
|-------------------------------|-------------|------|
| Ambient Operating Temperature | -40 to 85   | °C   |
| Storage Temperature           | -65 to 150  | °C   |
| Output Short Circuit Current  | 200         | mA   |
| Applied Input/Output Voltage  | -0.5 to 4.0 | V    |
| VCC                           | -0.5 to 4.0 | V    |

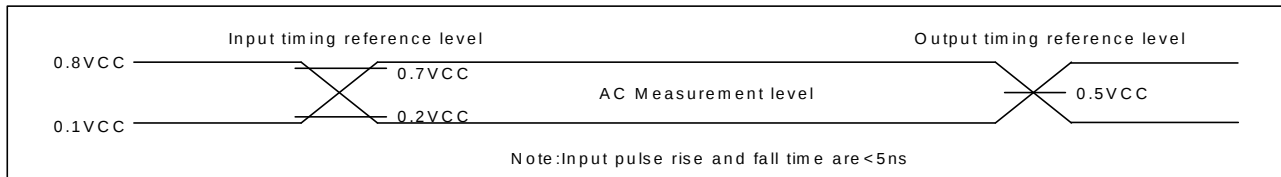


## 8.6. Capacitance Measurement Condition


| Symbol    | Parameter                       | Min              | Typ | Max | Unit | Conditions |
|-----------|---------------------------------|------------------|-----|-----|------|------------|
| $C_{IN}$  | Input Capacitance               |                  |     | 6   | pF   | VIN=0V     |
| $C_{OUT}$ | Output Capacitance              |                  |     | 8   | pF   | VOUT=0V    |
| $C_L$     | Load Capacitance                | 30               |     |     | pF   |            |
|           | Input Rise And Fall time        |                  |     | 5   | ns   |            |
|           | Input Pulse Voltage             | 0.1VCC to 0.8VCC |     |     | V    |            |
|           | Input Timing Reference Voltage  | 0.2VCC to 0.7VCC |     |     | V    |            |
|           | Output Timing Reference Voltage | 0.5VCC           |     |     | V    |            |

Figure13. Input Test Waveform and Measurement Level Maximum

### Negative Overshoot Waveform

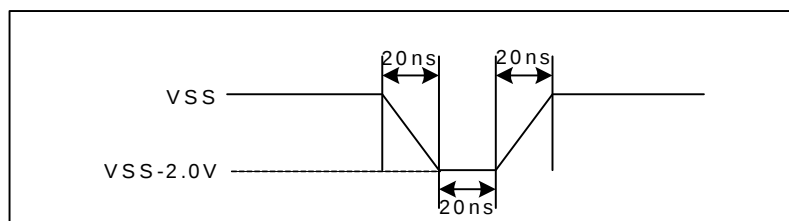

### Maximum Positive Overshoot Waveform

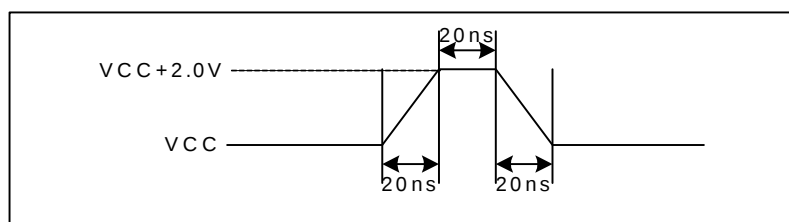

## 8.7. DC Characteristics

(T=-40°C~85°C, VCC=1.65~1.95V)

| Symbol    | Parameter               | Test Condition                            | Min.    | Typ | Max.    | Unit    |
|-----------|-------------------------|-------------------------------------------|---------|-----|---------|---------|
| $I_{LI}$  | Input Leakage Current   |                                           |         |     | $\pm 2$ | $\mu A$ |
| $I_{LO}$  | Output Leakage Current  |                                           |         |     | $\pm 2$ | $\mu A$ |
| $I_{CC1}$ | Standby Current         | CS#=VCC<br>VIN=VCC or VSS                 |         | 1   | 5       | $\mu A$ |
| $I_{CC3}$ | Operating Current(Read) | CLK=0.1VCC/0.9VCC at 120MHz for Fast Read |         | 15  | 20      | mA      |
|           |                         | CLK=0.1VCC/0.9VCC at 40MHz for Read       |         | 13  | 18      | mA      |
| $I_{CC4}$ | Operating Current(PP)   | CS#=VCC                                   |         |     | 10      | mA      |
| $I_{CC5}$ | Operating Current(WRSR) | CS#=VCC                                   |         |     | 10      | mA      |
| $I_{CC6}$ | Operating Current(SE)   | CS#=VCC                                   |         |     | 10      | mA      |
| $I_{CC7}$ | Operating Current(BE)   | CS#=VCC                                   |         |     | 10      | mA      |
| $V_{IL}$  | Input Low Voltage       |                                           | -0.5    |     | 0.2VCC  | V       |
| $V_{IH}$  | Input High Voltage      |                                           | 0.7VCC  |     | VCC+0.4 | V       |
| $V_{OL}$  | Output Low Voltage      | IOL=1.6mA                                 |         |     | 0.4     | V       |
| $V_{OH}$  | Output High Voltage     | IOH=-100uA                                | VCC-0.2 |     |         | V       |

## 8.8. AC Characteristics

(T=-40°C~85°C, VCC=1.65~1.95V, C<sub>L</sub>=30pf)

| Symbol            | Parameter                                                    | Min. | Typ | Max. | Unit |
|-------------------|--------------------------------------------------------------|------|-----|------|------|
| f <sub>C</sub>    | Serial Clock Frequency For: Fast Read(0BH),                  | DC   |     | 50   | MHz  |
| f <sub>R</sub>    | Serial Clock Frequency For: Read (03H); Read ID (9FH), (90H) | DC   |     | 40   | MHz  |
| t <sub>CLH</sub>  | Serial Clock High Time                                       | 4    |     |      | ns   |
| t <sub>CLL</sub>  | Serial Clock Low Time                                        | 4    |     |      | ns   |
| t <sub>CLCH</sub> | Serial Clock Rise Time(Slew Rate)                            | 0.2  |     |      | V/ns |
| t <sub>CHCL</sub> | Serial Clock Fall Time(Slew Rate)                            | 0.2  |     |      | V/ns |
| t <sub>SLCH</sub> | CS# Active Setup Time                                        | 5    |     |      | ns   |
| t <sub>CHSH</sub> | CS# Active Hold Time                                         | 5    |     |      | ns   |
| t <sub>SHCH</sub> | CS# Not Active Setup Time                                    | 5    |     |      | ns   |
| t <sub>CHSL</sub> | CS# Not Active Hold Time                                     | 5    |     |      | ns   |
| t <sub>SHSL</sub> | CS# High Time (read/write)                                   | 20   |     |      | ns   |
| t <sub>SHQZ</sub> | Output Disable Time                                          |      |     | 6    | ns   |
| t <sub>CLQX</sub> | Output Hold Time                                             | 1    |     |      | ns   |
| t <sub>DVCH</sub> | Data In Setup Time                                           | 2    |     |      | ns   |
| t <sub>CHDX</sub> | Data In Hold Time                                            | 2    |     |      | ns   |
| t <sub>HLCH</sub> | Hold# Low Setup Time(relative to Clock)                      | 5    |     |      | ns   |
| t <sub>HHCH</sub> | Hold# High Setup Time(relative to Clock)                     | 5    |     |      | ns   |
| t <sub>CHHL</sub> | Hold# High Hold Time(relative to Clock)                      | 5    |     |      | ns   |
| t <sub>CHHH</sub> | Hold# Low Hold Time(relative to Clock)                       | 5    |     |      | ns   |
| t <sub>HLQZ</sub> | Hold# Low To High-Z Output                                   |      |     | 6    | ns   |
| t <sub>HHQX</sub> | Hold# Low To Low-Z Output                                    |      |     | 6    | ns   |
| t <sub>CLQV</sub> | Clock Low To Output Valid                                    |      |     | 6.5  | ns   |
| t <sub>WHSL</sub> | Write Protect Setup Time Before CS# Low                      | 20   |     |      | ns   |
| t <sub>SHWL</sub> | Write Protect Hold Time After CS# High                       | 100  |     |      | ns   |
| t <sub>RES2</sub> | CS# High To Standby Mode With Electronic Signature Read      |      |     | 0.1  | us   |
| t <sub>W</sub>    | Write Status Register Cycle Time                             |      | 100 | 200  | ms   |
| t <sub>PP</sub>   | Page Programming Time                                        |      | 1.8 | 6    | ms   |
| t <sub>SE</sub>   | Sector Erase Time                                            |      | 140 | 360  | ms   |
| t <sub>BE</sub>   | Block Erase Time                                             |      | 1.0 | 1.8  | s    |
| t <sub>CE</sub>   | Chip Erase Time(FT25LX04/02)                                 |      | 7.2 | 12   | s    |

Max Value 4KB t<sub>SE</sub> with<50K cycles is 210ms and >50K & <100k cycles is 360ms.

Max Value 64KB t<sub>SE</sub> with<50K cycles is 1.3s and >50K & <100k cycles is 1.8s.

The value guaranteed by characterization, not 100% tested in production.

Figure14. Serial Input Timing



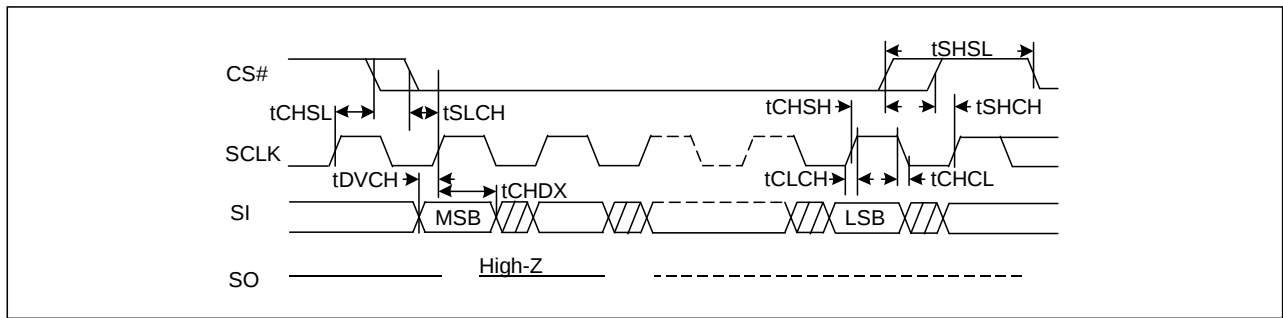


Figure15. Output Timing

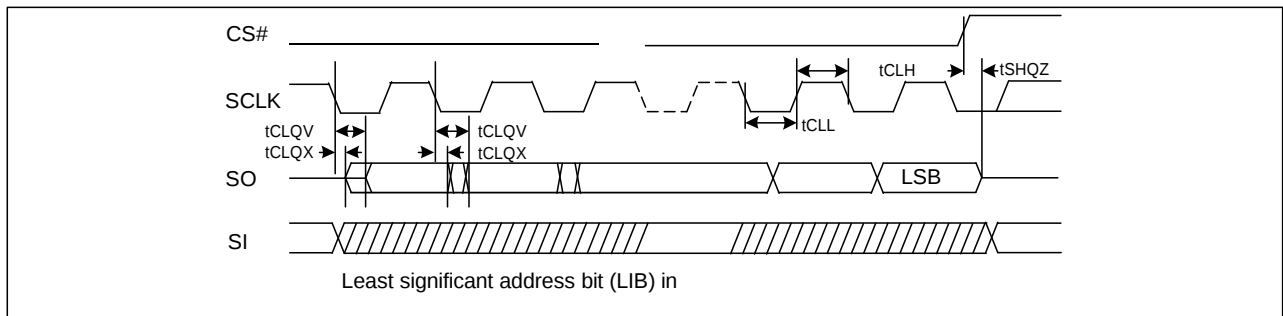

## 9. ORDERING INFORMATION

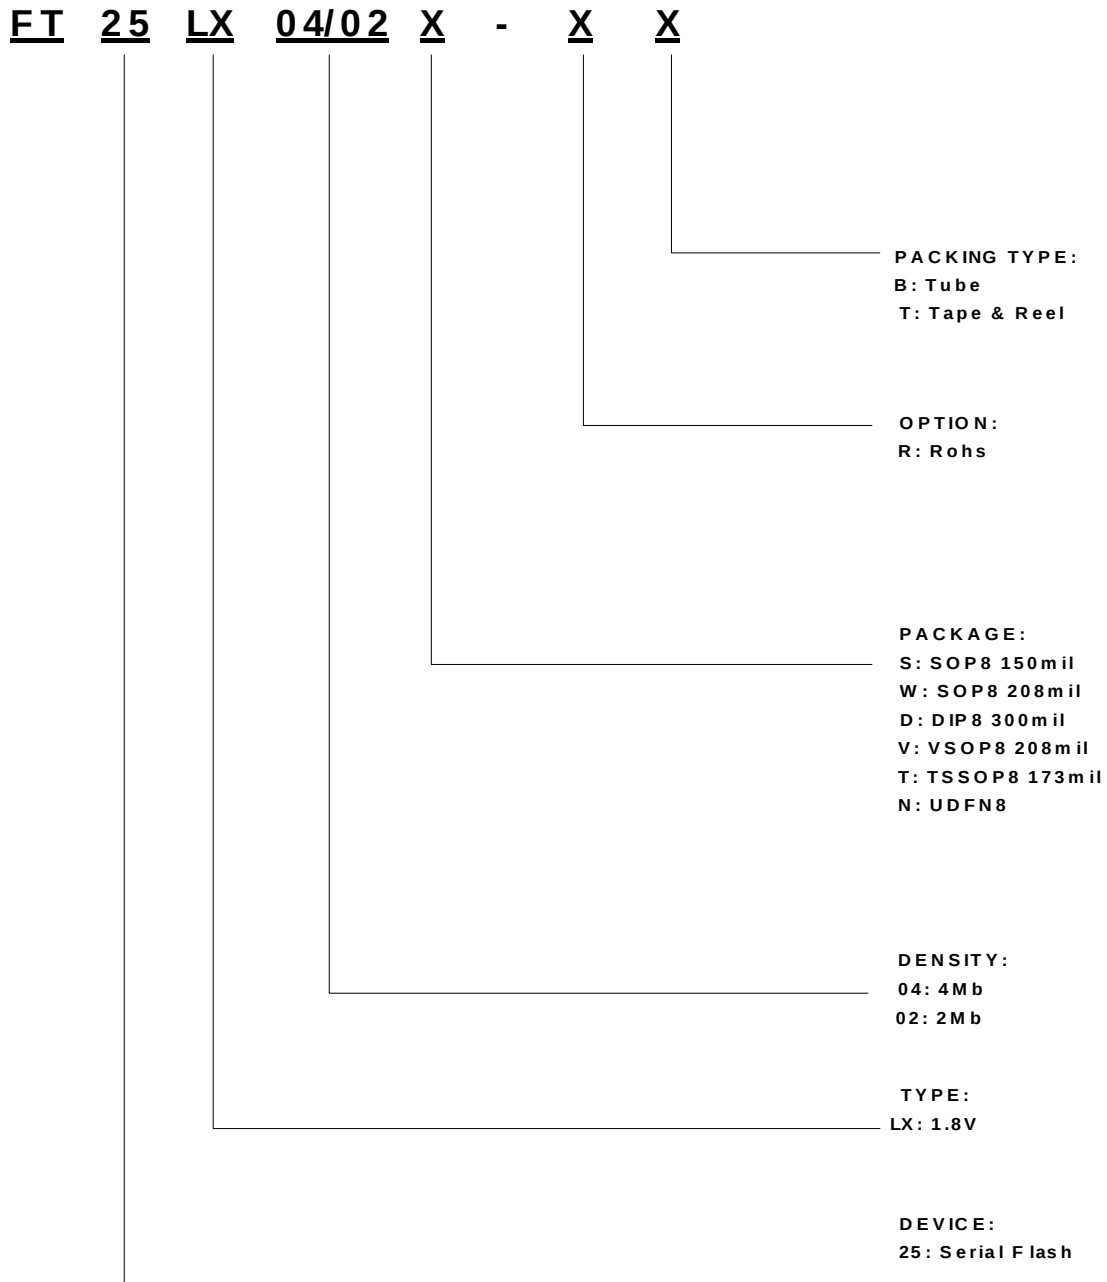


### NOTE:

- Standard bulk shipment is in Tube. Any alternation of packing method (for Tape, Reel and Tray etc.), please advise in advance.


## 10. PACKAGE INFORMATION

### 10.1. Package SOP8 150MIL

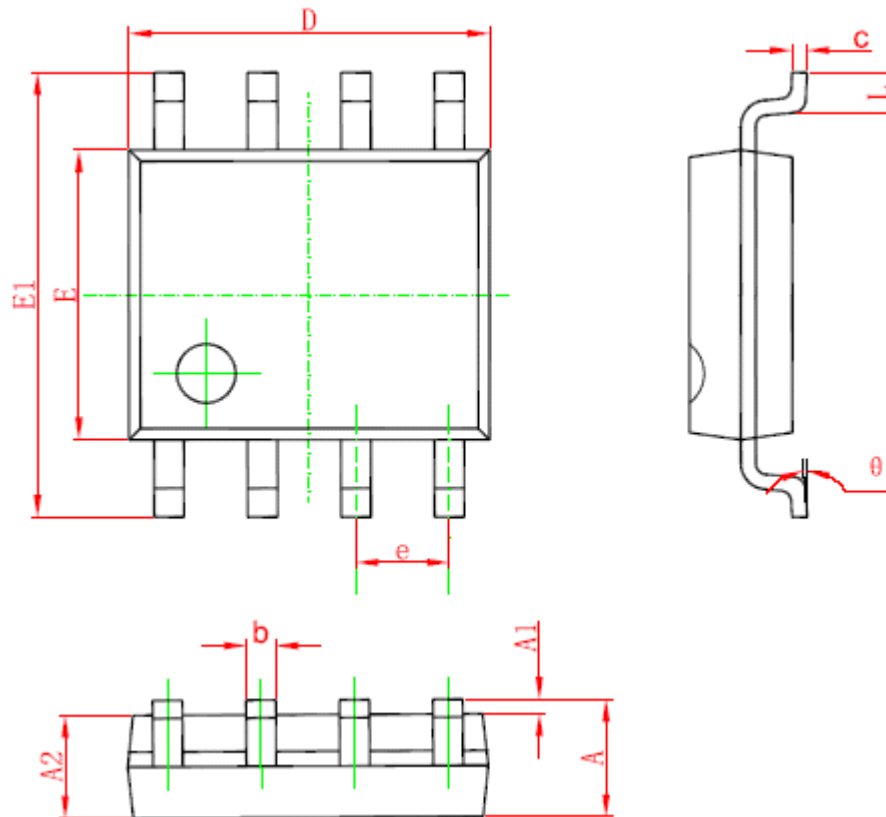


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 1.350                     | 1.750 | 0.053                | 0.069 |
| A1     | 0.100                     | 0.250 | 0.004                | 0.010 |
| A2     | 1.350                     | 1.550 | 0.053                | 0.061 |
| b      | 0.330                     | 0.510 | 0.013                | 0.020 |
| c      | 0.170                     | 0.250 | 0.006                | 0.010 |
| D      | 4.700                     | 5.100 | 0.185                | 0.200 |
| E      | 3.800                     | 4.000 | 0.150                | 0.157 |
| E1     | 5.800                     | 6.200 | 0.228                | 0.244 |
| e      | 1.270 (BSC)               |       | 0.050 (BSC)          |       |
| L      | 0.400                     | 1.270 | 0.016                | 0.050 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

## 10.2. Package SOP8 208MIL

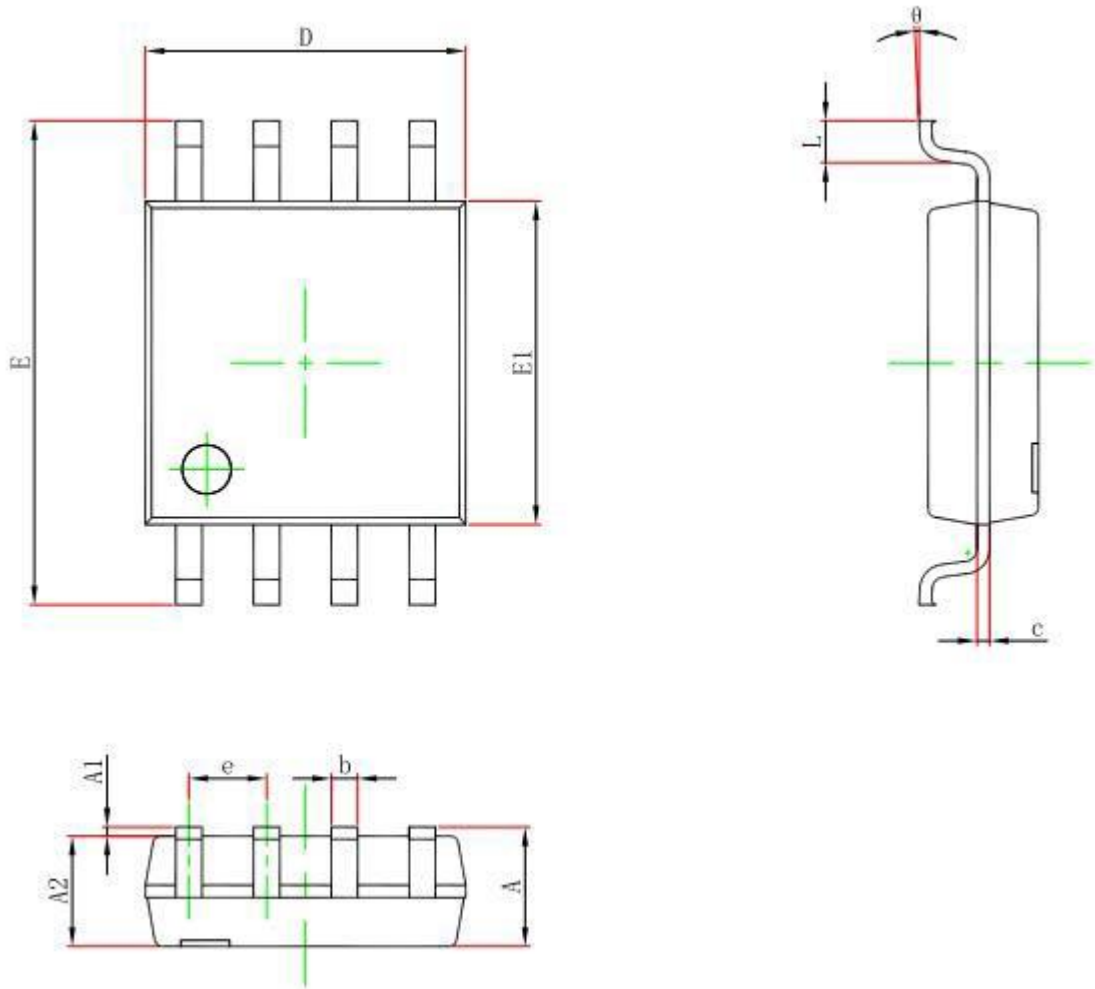


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | --                        | 2.150 | --                   | 0.085 |
| A1     | 0.050                     | 0.250 | 0.002                | 0.010 |
| A2     | 1.700                     | 1.900 | 0.067                | 0.075 |
| b      | 0.350                     | 0.500 | 0.014                | 0.020 |
| c      | 0.100                     | 0.250 | 0.004                | 0.010 |
| D      | 5.130                     | 5.330 | 0.202                | 0.210 |
| E      | 7.700                     | 8.100 | 0.303                | 0.319 |
| E1     | 5.180                     | 5.380 | 0.204                | 0.212 |
| e      | 1.270 (BSC)               |       | 0.050 (BSC)          |       |
| L      | 0.500                     | 0.850 | 0.020                | 0.033 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

### 10.3. Package DIP8 300MIL

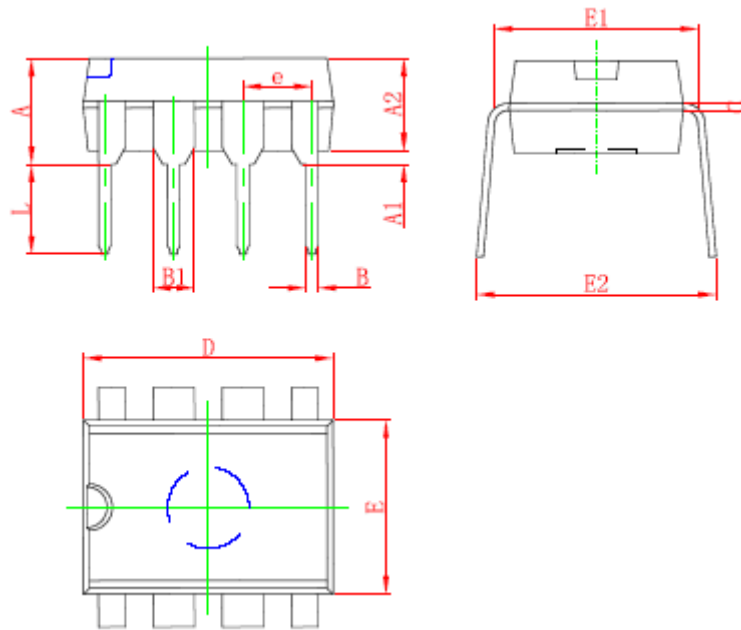


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 3.710                     | 4.310 | 0.146                | 0.170 |
| A1     | 0.510                     |       | 0.020                |       |
| A2     | 3.200                     | 3.600 | 0.126                | 0.142 |
| B      | 0.380                     | 0.570 | 0.015                | 0.022 |
| B1     | 1.524 (BSC)               |       | 0.060 (BSC)          |       |
| C      | 0.204                     | 0.360 | 0.008                | 0.014 |
| D      | 9.000                     | 9.400 | 0.354                | 0.370 |
| E      | 6.200                     | 6.600 | 0.244                | 0.260 |
| E1     | 7.320                     | 7.920 | 0.288                | 0.312 |
| e      | 2.540 (BSC)               |       | 0.100 (BSC)          |       |
| L      | 3.000                     | 3.600 | 0.118                | 0.142 |
| E2     | 8.400                     | 9.000 | 0.331                | 0.354 |

## 10.4. Package VSOP8 208MIL

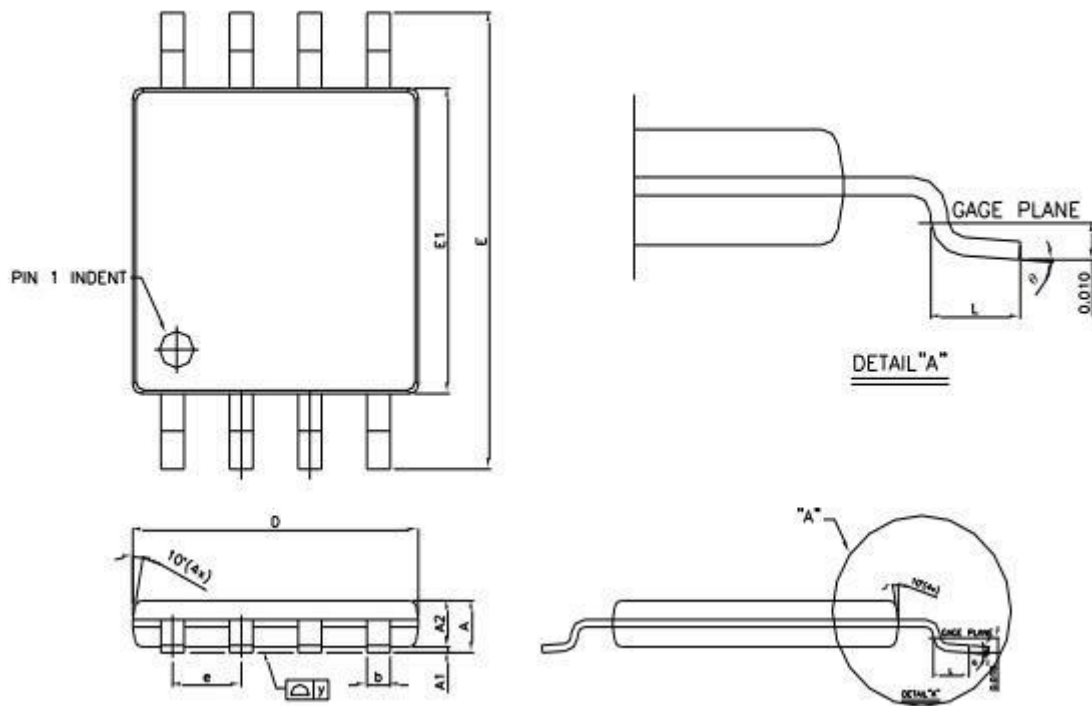


| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | --                        | 1.000 | --                   | 0.039 |
| A1     | 0.050                     | 0.150 | 0.002                | 0.006 |
| A2     | 0.750                     | 0.850 | 0.030                | 0.033 |
| b      | 0.350                     | 0.480 | 0.014                | 0.019 |
| c      | 0.127 (REF)               |       | 0.005 (REF)          |       |
| D      | 5.180                     | 5.380 | 0.204                | 0.212 |
| E      | 7.700                     | 8.100 | 0.303                | 0.319 |
| E1     | 5.180                     | 5.380 | 0.204                | 0.212 |
| e      | --                        | --    | --                   | --    |
| L      | 0.500                     | 0.800 | 0.020                | 0.031 |
| y      | --                        | 0.100 | --                   | 0.004 |
| θ      | 0°                        | 8°    | 0°                   | 8°    |

## 10.5. Package TSSOP8 173MIL

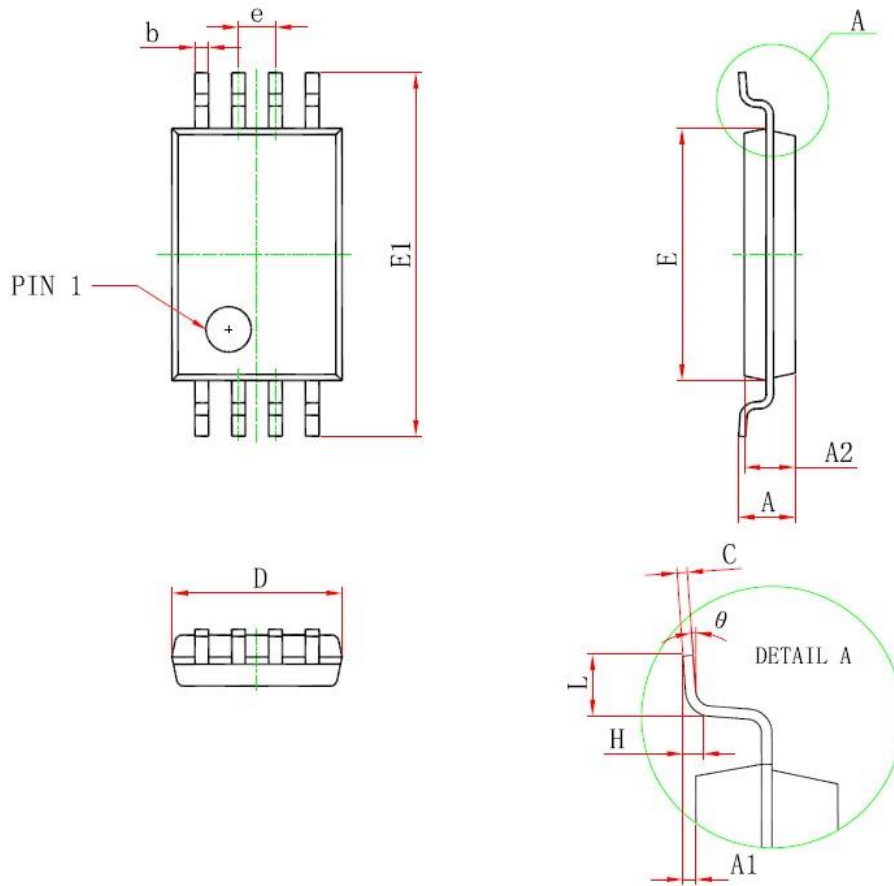


| Symbol   | Dimensions In Millimeters |       | Dimensions In Inches |       |
|----------|---------------------------|-------|----------------------|-------|
|          | Min                       | Max   | Min                  | Max   |
| D        | 2.900                     | 3.100 | 0.114                | 0.122 |
| E        | 4.300                     | 4.500 | 0.169                | 0.177 |
| b        | 0.190                     | 0.300 | 0.007                | 0.012 |
| c        | 0.090                     | 0.200 | 0.004                | 0.008 |
| E1       | 6.250                     | 6.550 | 0.246                | 0.258 |
| A        |                           | 1.200 |                      | 0.047 |
| A2       | 0.800                     | 1.000 | 0.031                | 0.039 |
| A1       | 0.050                     | 0.150 | 0.002                | 0.006 |
| e        | 0.65 (BSC)                |       | 0.026 (BSC)          |       |
| L        | 0.500                     | 0.700 | 0.020                | 0.028 |
| H        | 0.25 (TYP)                |       | 0.01 (TYP)           |       |
| $\theta$ | 1°                        | 7°    | 1°                   | 7°    |

## 10.6. Package UDFN8

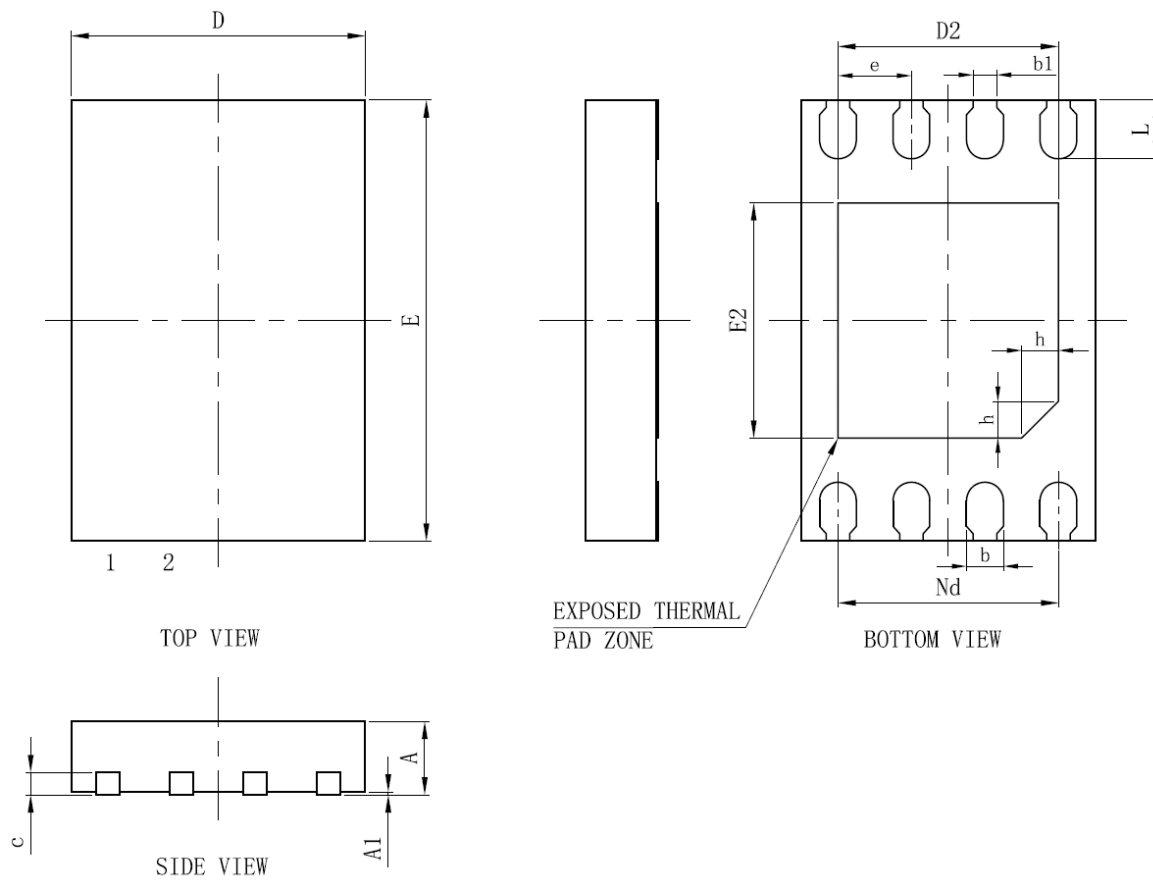

| Symbol | Dimensions In Millimeters |       | Dimensions In Inches |       |
|--------|---------------------------|-------|----------------------|-------|
|        | Min                       | Max   | Min                  | Max   |
| A      | 0.450                     | 0.550 | 0.017                | 0.021 |
| A1     | 0.000                     | 0.050 | 0.000                | 0.002 |
| b      | 0.180                     | 0.300 | 0.007                | 0.039 |
| b1     | 0.160REF                  |       | 0.006REF             |       |
| c      | 0.100                     | 0.200 | 0.004                | 0.008 |
| D      | 1.900                     | 2.100 | 0.075                | 0.083 |
| D2     | 1.400                     | 1.600 | 0.055                | 0.062 |
| e      | 0.500BSC                  |       | 0.020BSC             |       |
| Nd     | 1.500BSC                  |       | 0.059BSC             |       |
| E      | 2.900                     | 3.100 | 0.114                | 0.122 |
| E2     | 1.500                     | 1.700 | 0.059                | 0.067 |
| L      | 0.300                     | 0.500 | 0.012                | 0.020 |
| h      | 0.200                     | 0.300 | 0.066                | 0.12  |

## 10.7. Package DFN8 (4x3mm)

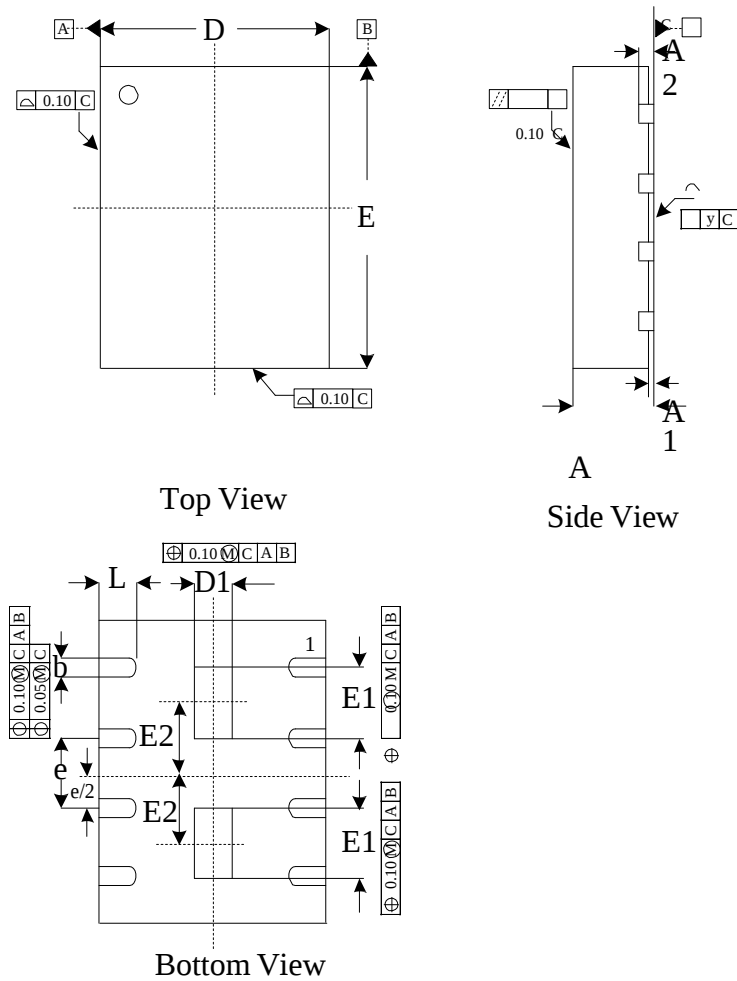


### Dimensions

| Symbol |     | A     | A1    | A2    | b     | D     | D1    | E     | E1    | E2       | e        | y     | L     |
|--------|-----|-------|-------|-------|-------|-------|-------|-------|-------|----------|----------|-------|-------|
| Unit   |     |       |       |       |       |       |       |       |       |          |          |       |       |
| mm     | Min | 0.50  | 0.00  |       | 0.25  | 2.90  | 0.10  | 3.90  | 0.70  |          |          | 0.00  | 0.50  |
|        | Nom | 0.55  |       | 0.15  | 0.30  | 3.00  | 0.25  | 4.00  | 0.80  | 0.80BSC  | 0.80BSC  |       | 0.60  |
|        | Max | 0.60  | 0.05  |       | 0.35  | 3.10  | 0.40  | 4.10  | 0.90  |          |          | 0.08  | 0.70  |
| Inch   | Min | 0.020 | 0.000 |       | 0.010 | 0.114 | 0.004 | 0.153 | 0.027 |          |          | 0.000 | 0.020 |
|        | Nom | 0.022 |       | 0.006 | 0.012 | 0.118 | 0.010 | 0.157 | 0.031 | 0.031BSC | 0.031BSC |       | 0.024 |
|        | Max | 0.024 | 0.002 |       | 0.014 | 0.122 | 0.016 | 0.161 | 0.035 |          |          | 0.003 | 0.028 |

Note:

- Both package length and width do not include mold flash.
- The exposed metal pad area on the bottom of the package is connected to device ground (GND pin), so both Floating and connecting GND of exposed pad are also available.

## 10.8. Package DFN8 (4x4mm)

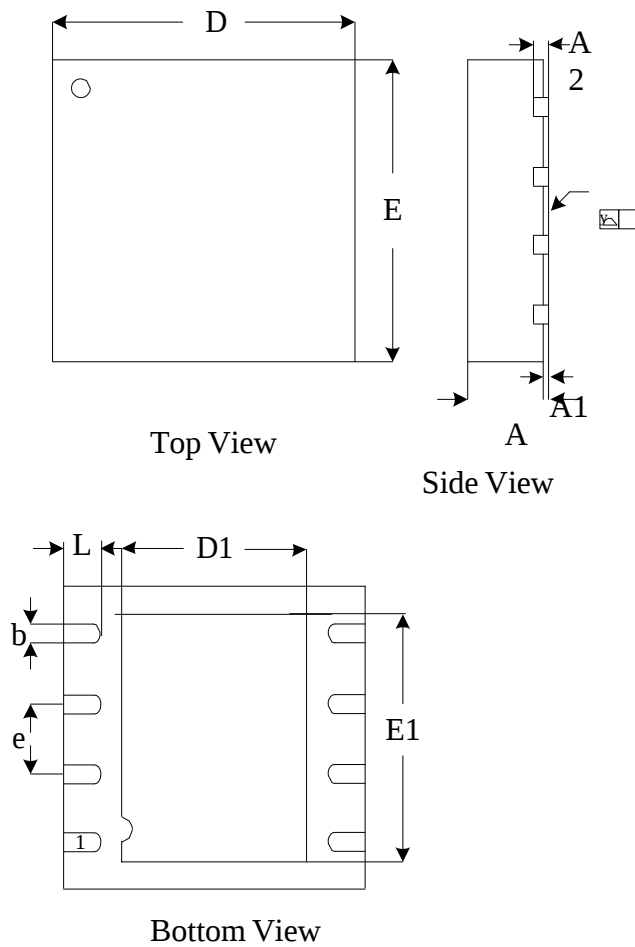

### Dimensions

| Symbol |     | A     | A1    | A2    | b     | D     | D1    | E     | E1    | e     | L     |
|--------|-----|-------|-------|-------|-------|-------|-------|-------|-------|-------|-------|
| Unit   |     |       |       |       |       |       |       |       |       |       |       |
| mm     | Min | 0.50  |       |       | 0.25  | 3.90  | 2.20  | 3.90  | 2.60  |       | 0.35  |
|        | Nom | 0.55  |       | 0.15  | 0.30  | 4.00  | 2.30  | 4.00  | 2.70  | 0.80  | 0.40  |
|        | Max | 0.60  | 0.05  |       | 0.35  | 4.10  | 2.40  | 4.10  | 2.80  |       | 0.45  |
| Inch   | Min | 0.020 |       |       | 0.010 | 0.153 | 0.087 | 0.153 | 0.102 |       | 0.014 |
|        | Nom | 0.022 |       | 0.006 | 0.012 | 0.157 | 0.091 | 0.157 | 0.106 | 0.031 | 0.016 |
|        | Max | 0.024 | 0.002 |       | 0.014 | 0.161 | 0.095 | 0.161 | 0.110 |       | 0.018 |

Note: Both package length and width do not include mold flash.

## 11. REVISION HISTORY

| Version No      | Description                                                                            | Date         |
|-----------------|----------------------------------------------------------------------------------------|--------------|
| Preliminary 0.0 | Initial Release (Created from FT25L04/02 rev 1.4)                                      | Feb 26, 2018 |
| Preliminary 0.1 | Revise ordering information and correct read ID "9F" timing diagram                    | Mar 21, 2018 |
| Preliminary 0.2 | Revise to include DFN8 4x3 & 4x4mm package type for ordering, DFN8 connection diagram  | May 11, 2018 |
| Rev 0.3         | Revise to add read ID (9FH) & (90H) to FR set clock at AC parameter.                   | Sep 02, 2018 |
| Rev 0.4         | Revise to remove "G" option from ordering information, as ROHs is complying to green . | Jan-04-2019  |



**XTX Technology (Shenzhen) Limited**

深圳龙岗区龙岗大道 8288 号大运软件小镇 10 栋 1 楼

10# Building, E-Town, 8288# Long Gang Avenue, Long Gang District, Shenzhen, China

Tel: (86 755) 28229862

Fax: (86 755) 28229847

Web Site: <http://www.xtxtech.com/>

Technical Contact: [fae@xtxtech.com](mailto:fae@xtxtech.com)

\* Information furnished is believed to be accurate and reliable. However, XTX Technology Limited assumes no responsibility for the consequences of use of such information or for any infringement of patents of other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent rights of XTX Technology Limited. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. XTX Technology Limited products are not authorized for use as critical components in life support devices or systems without express written approval of XTX Technology Limited. The XTX logo is a registered trademark of XTX Technology Limited. All other names are the property of their respective own.