

HIGH CURRENT SWITCHING APPLICATIONS.
POWER AMPLIFIER APPLICATIONS.

FEATURES:


- High Collector Current : $I_C = -7A$
- Low Collector Saturation Voltage : $V_{CE(sat)} = -0.4V(\text{Max.})$ (at $I_C = -4A$)
- High Collector Power Dissipation : $P_C = 40W$ (at $T_c = 25^\circ C$)
- Complementary to 2SD1363

MAXIMUM RATINGS ($T_a = 25^\circ C$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Collector-Base Voltage	V_{CBO}	-70	V
Collector-Emitter Voltage	V_{CEO}	-50	V
Emitter-Base Voltage	V_{EBO}	-5	V
Collector Current	I_C	-7	A
Base Current	I_B	-1	A
Collector Power Dissipation	P_C	$T_a = 25^\circ C$	1.5
		$T_c = 25^\circ C$	40
Junction Temperature	T_j	150	$^\circ C$
Storage Temperature Range	T_{stg}	-55 ~ 150	$^\circ C$

INDUSTRIAL APPLICATIONS

Unit in mm

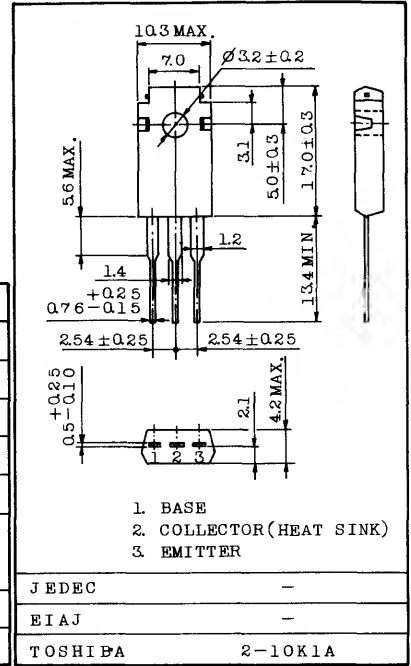

ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ C$)

Weight : 2.0g

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT	
Collector Cut-off Current	I_{CBO}	$V_{CB} = -70V, I_E = 0$	-	-	-30	μA	
Emitter Cut-off Current	I_{EBO}	$V_{EB} = -5V, I_C = 0$	-	-	-50	μA	
Collector-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C = -50mA, I_B = 0$	-50	-	-	V	
DC Current Gain	$h_{FE(1)}$ (Note)	$V_{CE} = -1V, I_C = -1A$	70	-	240		
	$h_{FE(2)}$	$V_{CE} = -1V, I_C = -4A$	30	-	-		
Saturation Voltage	Collector-Emitter	$V_{CE(sat)}$	$I_C = -4A, I_B = -0.4A$	-	-0.2	-0.4	V
	Base-Emitter	$V_{BE(sat)}$	$I_C = -4A, I_B = -0.4A$	-	-0.9	-1.2	
Transition Frequency	f_T	$V_{CE} = -4V, I_C = -1A$	-	10	-	MHz	
Collector Output Capacitance	C_{ob}	$V_{CB} = -10V, I_E = 0, f = 1MHz$	-	250	-	pF	
Switching Time	Turn-on Time	t_{on}		0.2	-	μs	
	Storage Time	t_{stg}		-	2.5		
	Fall Time	t_f		-	0.5		

Note : $h_{FR(1)}$ Classification 0 : 70 ~ 140, Y : 120 ~ 240

