



G1555

High Performance Current Mode PWM Switch

ANALOG PWM IC

1.0 General Description

The G1555 is a high performance AC/DC power supply Switch for battery charger and adapter applications requirements up to 28W in an open frame design. It can meet less than 80 mW standby power.

G1555 is a current mode PWM Switch with a high voltage power MOSFET. It operates in fixed frequency which is precisely set internally. It could operate in Extended Burst Mode at no load or light load, in which mode switching loss is minimized and the frequency is adjusted internally. To ensure that power supplies work quietly, the frequency is set beyond 20 KHz.

Small current is needed when G1555 starts up and works, thus a large value resistor could be used in the startup circuit to minimize the standby power. Slope compensation circuit is integrated in G1555, which improves system large signal stability and reduces the possible sub-harmonic oscillation at high PWM duty cycle.

Frequency shuffling technique is integrated in G1555, which helps to achieve excellent EMI performance.

G1555 offers complete protection functions including cycle-by-cycle current limiting protection(OCP), over load protection(OLP), VDD over voltage protection(OVP), VDD over voltage clamp and under voltage lockout(UVLO).

The G1555 is available in DIP8 package.

Features

- ◆ Built-in Soft Start
- ◆ Random Frequency Adjustment to Reduce System EMI
- ◆ Audio Noise Free Operation
- ◆ Internal Cable Compensation
- ◆ Extended Burst Mode Control For Improved Efficiency and Minimum Standby Power Design
- ◆ Internal Synchronized Slope Compensation
- ◆ Low VDD Startup Current and Low Operating Current
- ◆ Leading Edge Blanking on Current Sense Input
- ◆ Over Load Protection(OLP) and Cycle-by-Cycle Current Limiting Protection(OCP)
- ◆ Over Voltage Protection (OVP), Under Voltage Lockout Protection (UVLO) and Over Voltage Clamp

Applications


- Offline AC/DC flyback converter
- Power Adapter
- Set-Top Box Power Supplies
- Open-frame SMPS
- Auxiliary Power Supply for PC and Server
- Digital Cameras and Camcorder Adapter

G1555

High Performance Current Mode PWM Switch

2.0 Products Information

2.1 Pin configuration

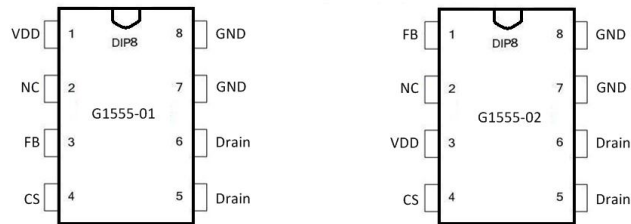


Pin Configuration: G1555 Series

Pin Name	I/O	Description
VDD	P	Power Supply
NC	-	Unconnected Pin
FB	I	Feed Back Input Pin
CS	I	Current Sense Input Pin
DRAIN	O	HV MOSFET Drain Pin. The Drain pin is connected to the primary lead of the transformer.
GND	P	Ground

3.0 Package Information

8-Pin Plastic DIP

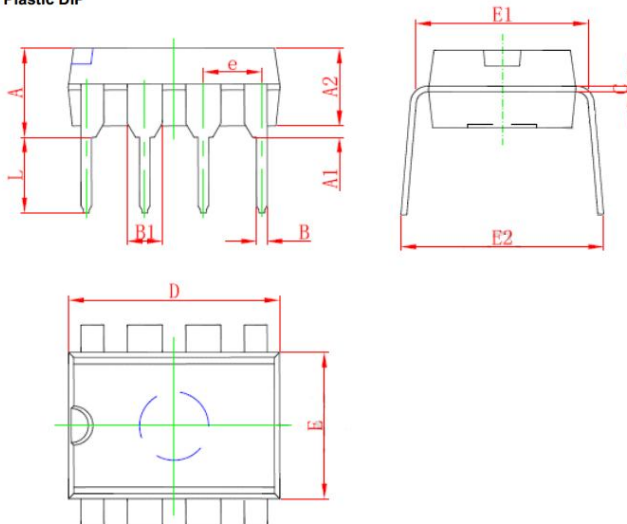

Symbol	Dimension in Millimeters		Dimensions in Inches	
	Min	Max	Min	Max
A	3.710	5.334	0.146	0.210
A1	0.381	-	0.015	-
A2	2.921	4.953	0.115	0.195
B	0.350	0.650	0.014	0.026
B1	1.524(BSC)		0.06(BSC)	
C	0.200	0.360	0.008	0.014
D	9.000	10.160	0.354	0.400
E	6.096	7.112	0.240	0.280
E1	7.320	8.255	0.288	0.325
e	2.540(BSC)		0.1(BSC)	
L	2.921	3.810	0.115	0.150
E2	7.620	10.920	0.300	0.430

Data and specifications subject to change without notice.

This product has been designed and qualified for Industrial Level and Lead-Free.

Qualification Standards can be found on GS's Web site.

Global Semiconductor HEADQUARTERS:

Scotia Centre, 4th Floor, P.O.Box 2804, George Town, Grand Cayman KY1-1112, Cayman



Visit us at www.globalsemi-group.com for sales contact information.