

## GLP2950

### 100mA Low-Dropout Voltage Regulator

#### Description

The GLP2950 is a monolithic integrated voltage regulator with low dropout voltage, and low quiescent current. It includes many features that suitable for different applications.



#### Features

- High accuracy 2.5, 3.0, 3.3, 3.6 or 5V fixed output
- Extremely low quiescent current and dropout voltage
- Extremely tight load and line regulation
- Current and thermal Limiting
- Very low temperature coefficient

#### Applications


- Battery powered equipment
- Cellular Phones

#### Package Dimensions

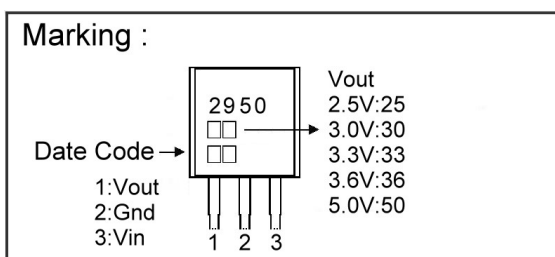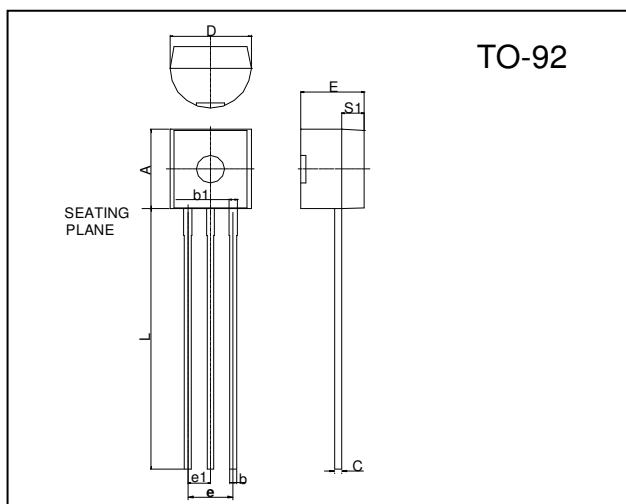

| REF. | Millimeter |      | REF. | Millimeter |       |
|------|------------|------|------|------------|-------|
|      | Min.       | Max. |      | Min.       | Max.  |
| A    | 4.45       | 4.7  | D    | 4.44       | 4.7   |
| S1   | 1.02       | -    | E    | 3.30       | 3.81  |
| b    | 0.36       | 0.51 | L    | 12.70      | -     |
| b1   | 0.36       | 0.76 | e1   | 1.150      | 1.390 |
| C    | 0.36       | 0.51 | e    | 2.42       | 2.66  |

#### Application Circuit

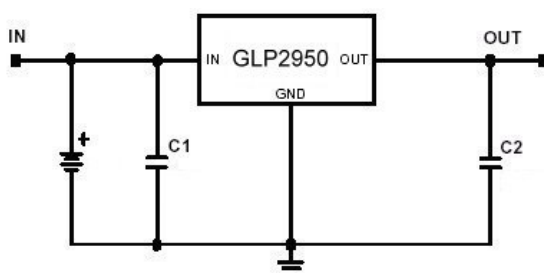

#### Absolute Maximum Ratings

| Parameter                      | Symbol            | Ratings    | Unit |
|--------------------------------|-------------------|------------|------|
| Input Voltage                  | V <sub>CC</sub>   | -0.3 ~ +30 | V    |
| Output Current                 | I <sub>OUT</sub>  | 100        | mA   |
| Output Voltage                 | V <sub>OUT</sub>  | 2.5 ~ 5.0  | V    |
| Storage Temperature            | T <sub>stg</sub>  | -65 ~ +150 | °C   |
| Maximum Junction Temperature   | T <sub>jmax</sub> | 150        | °C   |
| Operating Junction Temperature | T <sub>j</sub>    | -40 ~ +125 | °C   |

## Electrical Characteristics (T<sub>J</sub>=25°C, V<sub>IN</sub>=6V, I<sub>O</sub>=100μA, and C<sub>O</sub>=1μF, unless otherwise specified)

| Parameter                              | Symbol               | Condition  | Min  | TYP  | Max | Unit   |   |
|--|----------------------|--|--|------|-----|--------|---|
| Output Voltage                         | V <sub>OUT</sub>     | GLP2950-25   | 100μA ≤ I <sub>O</sub> ≤ 100mA<br>T <sub>J</sub> ≤ T <sub>JMAX</sub> | 2.45 | 2.5 | 2.55   | V |
|  |                      | GLP2950-30   |  | 2.94 | 3.0 | 3.06   |   |
|  |                      | GLP2950-33   |  | 3.23 | 3.3 | 3.36   |   |
|  |                      | GLP2950-36   |  | 3.53 | 3.6 | 3.67   |   |
|  |                      | GLP2950-50   |  | 4.90 | 5.0 | 5.10   |   |
| Line Regulation                        | REG <sub>LINE</sub>  | V <sub>O</sub> +1 ≤ V <sub>IN</sub> ≤ 30V                    | -  | 0.04 | 0.4 | %      |   |
| Load Regulation                        | REG <sub>LOAD</sub>  | 100μA ≤ I <sub>O</sub> ≤ 100mA                               | -  | 0.1  | 0.3 | %      |   |
| Current Limit                          | I <sub>LIM</sub>     | V <sub>OUT</sub> =0  | -  | 160  | 200 | mA     |   |
| Output Voltage Temperature Coefficient | TC                   |  | -  | 20   |     | ppm/°C |   |
| Dropout Voltage                        | V <sub>DROPOUT</sub> | I <sub>O</sub> =100μA  | -  | 50   | 80  | mV     |   |
|  |                      | I <sub>O</sub> =100mA(Note1)                                 | -  | 380  | 450 |        |   |
| Ground Current                         | I <sub>Q</sub>       | I <sub>O</sub> =100μA  | -  | 75   | 120 | μA     |   |
|  |                      | I <sub>O</sub> =100mA  | -  | 8    | 12  | mA     |   |
| Dropout Ground Current                 |                      | V <sub>IN</sub> =V <sub>O</sub> -0.5V, I <sub>O</sub> =100μA | -  | 110  | 170 | μA     |   |
| Output Voltage Noise<br>f=10Hz~100kHz  | e <sub>N</sub>       | C <sub>O</sub> =1μF  | -  | 430  | -   | μV     |   |
|  |                      | C <sub>O</sub> =200μF  | -  | 160  | -   |        |   |

Note 1: Dropout Voltage is defined as the input to output differential at which the output voltage drops 100mV below its nominal value measured at 1V differential.

## Characteristics Curve

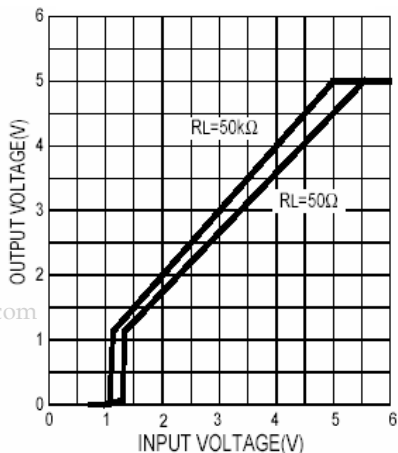


Fig 1. Dropout Characteristics



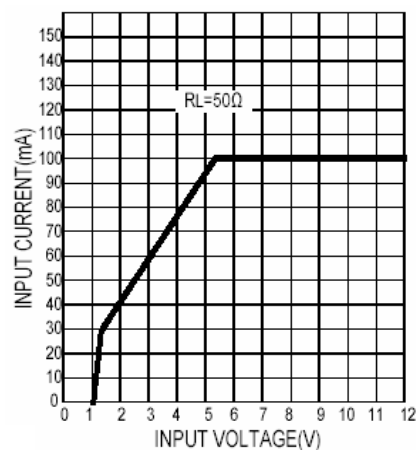



Fig 2. Input Current

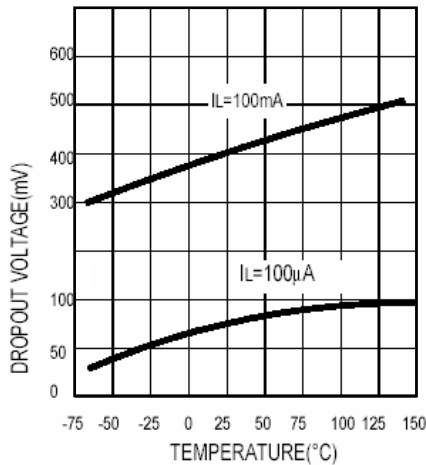


**Fig 3. Dropout Voltage**

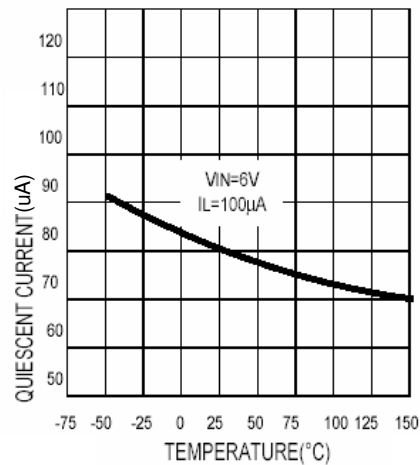


**Fig 4. Ground Pin Current**

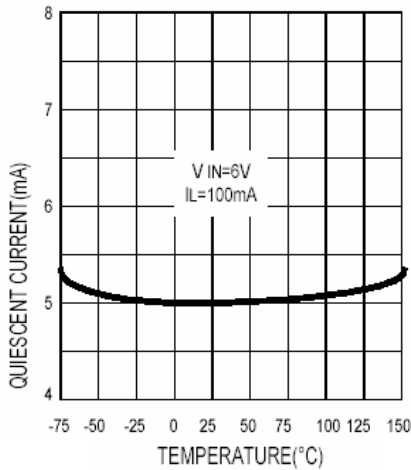

**Fig 5. Ground Pin Current**

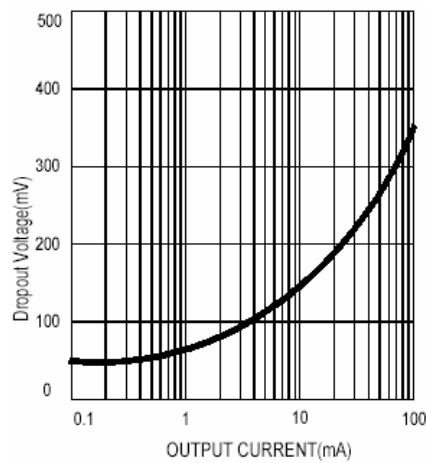

**Fig 6. Dropout Voltage**

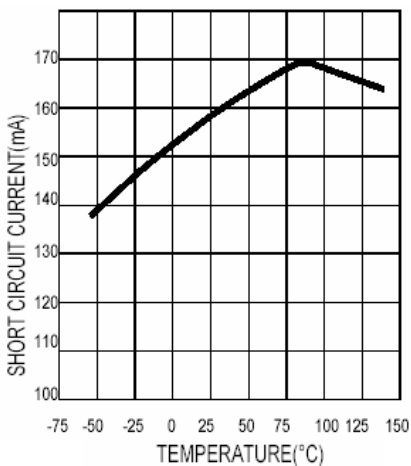

**Fig 7. Short Circuit Current**

www.DataSheet4U.com

**Important Notice:**

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of GTM.
- GTM reserves the right to make changes to its products without notice.
- GTM semiconductor products are not warranted to be suitable for use in life-support Applications, or systems.
- GTM assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.

**Head Office And Factory:**

- Taiwan:** No. 17-1 Tatung Rd. Fu Kou Hsin-Chu Industrial Park, Hsin-Chu, Taiwan, R. O. C.
- TEL : 886-3-597-7061 FAX : 886-3-597-9220, 597-0785
- China:** (201203) No.255, Jang-Jiang Tsai-Lueng RD. , Pu-Dung-Hsin District, Shang-Hai City, China
- TEL : 86-21-5895-7671 ~ 4 FAX : 86-21-38950165